



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

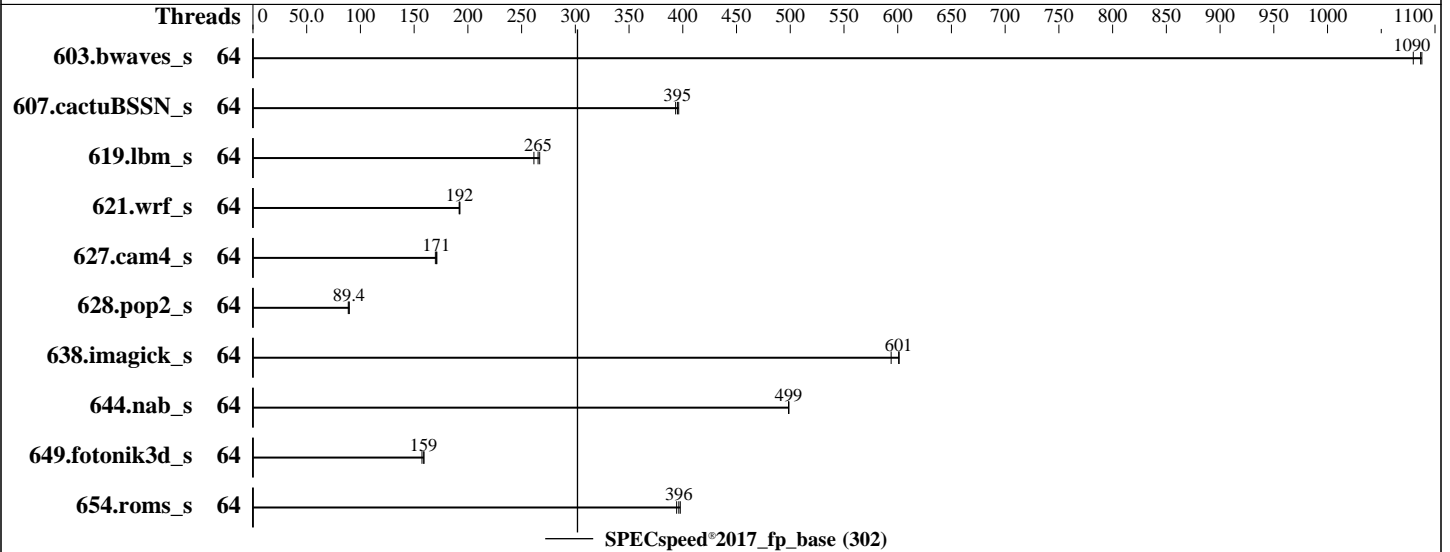

Hardware

CPU Name: Intel Xeon Gold 6438N
 Max MHz: 3600
 Nominal: 2000
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx8 PC5-4800B-R, running at 4000)
 Storage: 1 x 960GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 5.29 released Dec-2022 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	54.2	1090	<u>54.3</u>	<u>1090</u>	54.6	1080							
607.cactuBSSN_s	64	42.4	393	42.1	396	<u>42.2</u>	<u>395</u>							
619.lbm_s	64	<u>19.7</u>	<u>265</u>	20.0	261	19.6	267							
621.wrf_s	64	68.9	192	<u>68.7</u>	<u>192</u>	68.7	192							
627.cam4_s	64	<u>51.9</u>	<u>171</u>	52.2	170	51.8	171							
628.pop2_s	64	<u>133</u>	<u>89.4</u>	134	88.7	133	89.5							
638.imagick_s	64	<u>24.0</u>	<u>601</u>	24.0	601	24.3	594							
644.nab_s	64	35.0	499	35.1	498	<u>35.0</u>	<u>499</u>							
649.fotonik3d_s	64	57.3	159	58.0	157	<u>57.4</u>	<u>159</u>							
654.roms_s	64	<u>39.7</u>	<u>396</u>	39.9	394	39.6	398							

SPECspeed®2017_fp_base = 302

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

- Set Enable LP [Global] to Single LP
- Set Patrol Scrub to Disabled
- Set Power Performance Tuning to BIOS Controls EFB
- Set ENERGY_PERF_BIAS_CFG_mode to Performance

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Mar 6 23:29:43 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

Platform Notes (Continued)

1. `uname -a`

```
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

2. `w`

```
23:29:43 up 1:46, 2 users, load average: 5.44, 5.83, 3.48
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1     21:44   1:44m  0.82s  0.00s  -bash
h3c      pts/0    21:44   1:45m  0.01s  0.01s  sshd: h3c [priv]
```

3. Username

From environment variable \$USER: root

4. `ulimit -a`

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124781
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124781
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=64 --tune base -o all --define drop_caches
fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=64 --tune base --output_format all --define
drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

Platform Notes (Continued)

```
--logfile $SPEC/tmp/CPU2017.003/templogs/preenv.fpspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6438N
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 7
microcode       : 0x2b000111
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings        : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 0:  apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1:  apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6438N
BIOS Model name:       Intel(R) Xeon(R) Gold 6438N
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
Stepping:               7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

Platform Notes (Continued)

CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-31
NUMA node1 CPU(s): 32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515214 MB
node 0 free: 509843 MB
node 1 cpus: 32-63
node 1 size: 516041 MB
node 1 free: 515400 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 1056006024 kB

10. who -r

run-level 3 Mar 6 21:43

11. Systemd service manager version: systemd 250 (250-6.e19_0)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache

```

13. Services, from systemctl list-unit-files

```

STATE                                UNIT FILES
enabled                               ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled                               arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq iprdump iprinit iprupdate iscsid iscsiui kpatch kvm_stat
ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect podman podman-auto-update

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

Platform Notes (Continued)

```

indirect      podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
              serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
              systemd-pstore systemd-sysextr wpa_supplicant
              spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.60 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

Platform Notes (Continued)

vm.zone_reclaim_mode 0

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  31G  789G  4% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          New H3C Technologies Co., Ltd.
Product:         H3C UniServer R4900 G6 Ultra
Product Family: Rack
Serial:          210235A4CJ4900060001

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  14x Hynix HMC94AEBRA102N 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

Platform Notes (Continued)

2x Hynix HMC94AEBRA109N 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.00.08
BIOS Date: 01/09/2023
BIOS Revision: 5.29

Compiler Version Notes

C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Mar-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jan-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Aug-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 302

H3C UniServer R4900 G6 (Intel Xeon Gold 6438N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Aug-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevA.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-06 23:29:43-0500.

Report generated on 2023-03-29 00:34:06 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.