



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

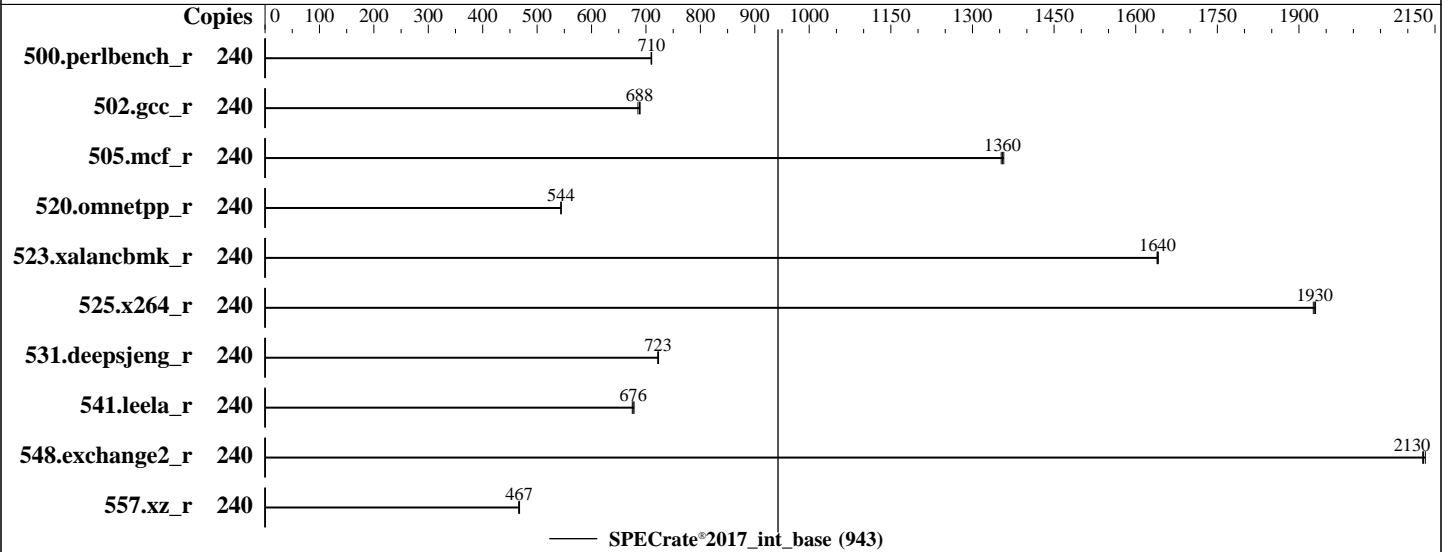

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 120 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x SATA SSD, 1.92TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3983-A1x. Released Mar-2023 tested as V1.0.0.0 R0.24.1 for D3983-A1x Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	538	710	<u>538</u>	<u>710</u>	539	709							
502.gcc_r	240	496	685	493	689	<u>494</u>	<u>688</u>							
505.mcf_r	240	287	1350	<u>286</u>	<u>1360</u>	286	1360							
520.omnetpp_r	240	<u>579</u>	<u>544</u>	579	544	579	544							
523.xalancbmk_r	240	<u>155</u>	<u>1640</u>	155	1640	154	1640							
525.x264_r	240	218	1930	218	1930	<u>218</u>	<u>1930</u>							
531.deepsjeng_r	240	<u>381</u>	<u>723</u>	380	723	381	722							
541.leela_r	240	589	675	<u>588</u>	<u>676</u>	586	678							
548.exchange2_r	240	295	2130	<u>295</u>	<u>2130</u>	296	2130							
557.xz_r	240	<u>555</u>	<u>467</u>	556	466	554	468							

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/Benchmark/speccpu-1.1.9/lib/intel64:/home/Benchmark/speccpu-1.1.9/lib/ia32:/home/Benchmark/spec
cpu-1.1.9/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
 DCU Streamer Prefetcher = Disabled
 Package C State limit = C0
 CPU Performance Boost = Aggressive
 SNC (Sub NUMA) = Enable SNC4
 FAN Control = Full

Sysinfo program /home/Benchmark/speccpu-1.1.9/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Mar 14 15:02:40 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:02:40 up 3 min, 2 users, load average: 2.69, 6.29, 3.09
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:00 1:57 0.08s 0.08s -bash
root pts/0 10.118.163.62 15:00 16.00s 2.39s 0.27s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125137
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4125137
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/Benchmark/speccpu-1.1.9

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 8
microcode : 0x2b000130
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
cpu cores      : 60
siblings      : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 240
On-line CPU(s) list:   0-239
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8490H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              2
Stepping:               8
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities

Virtualization:        VT-x
L1d cache:             5.6 MiB (120 instances)
L1i cache:             3.8 MiB (120 instances)
L2 cache:              240 MiB (120 instances)
L3 cache:              225 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-14,120-134
NUMA node1 CPU(s):    15-29,135-149
NUMA node2 CPU(s):    30-44,150-164
NUMA node3 CPU(s):    45-59,165-179
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node4 CPU(s):      60-74,180-194
NUMA node5 CPU(s):      75-89,195-209
NUMA node6 CPU(s):      90-104,210-224
NUMA node7 CPU(s):      105-119,225-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-14,120-134
node 0 size: 128562 MB
node 0 free: 127625 MB
node 1 cpus: 15-29,135-149
node 1 size: 129016 MB
node 1 free: 127786 MB
node 2 cpus: 30-44,150-164
node 2 size: 129016 MB
node 2 free: 128644 MB
node 3 cpus: 45-59,165-179
node 3 size: 129016 MB
node 3 free: 128469 MB
node 4 cpus: 60-74,180-194
node 4 size: 129016 MB
node 4 free: 128655 MB
node 5 cpus: 75-89,195-209
node 5 size: 129016 MB
node 5 free: 128690 MB
node 6 cpus: 90-104,210-224
node 6 size: 129016 MB
node 6 free: 128662 MB
node 7 cpus: 105-119,225-239
node 7 size: 128647 MB
node 7 free: 128290 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
9. /proc/meminfo
   MemTotal:      1056059516 kB
-----
10. who -r
    run-level 3 Mar 14 15:00
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target  Status
    multi-user      running
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                    irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog libvirt lvm2-monitor
                    nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                    wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
                    firewallld gpm grub2-once haveged-switch-root ipmi ipmiev d iscsi-init iscsid
                    issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                    nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnservice
                    systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext
                    systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd
                    virtnodevd virtnwfilterd virtproxymd virtqemud virtsecret d virtstoraged
    indirect        pcsd virtlockd virtlogd wickedd
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=0fc48b86-32e9-4597-b40a-5581420df75f
    splash=silent
    resume=/dev/disk/by-uuid/82af1018-ea10-4182-81e8-fe09e4c70bd4
    mitigations=auto
    quiet
    security=apparmor
    crashkernel=322M,high
    crashkernel=72M,low
-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 3.50 GHz.
                        The governor "powersave" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
-----
15. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space     2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu-1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   741G  34G  707G  5% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX2530 M7
Product Family: SERVER
Serial:          EWCDxxxxxx

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.24.1 for D3982-Alx
BIOS Date: 01/06/2023
BIOS Revision: 0.24
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_int_base = 943

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-14 02:02:39-0400.
Report generated on 2024-01-29 17:31:26 by CPU2017 PDF formatter v6716.
Originally published on 2023-04-11.