



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

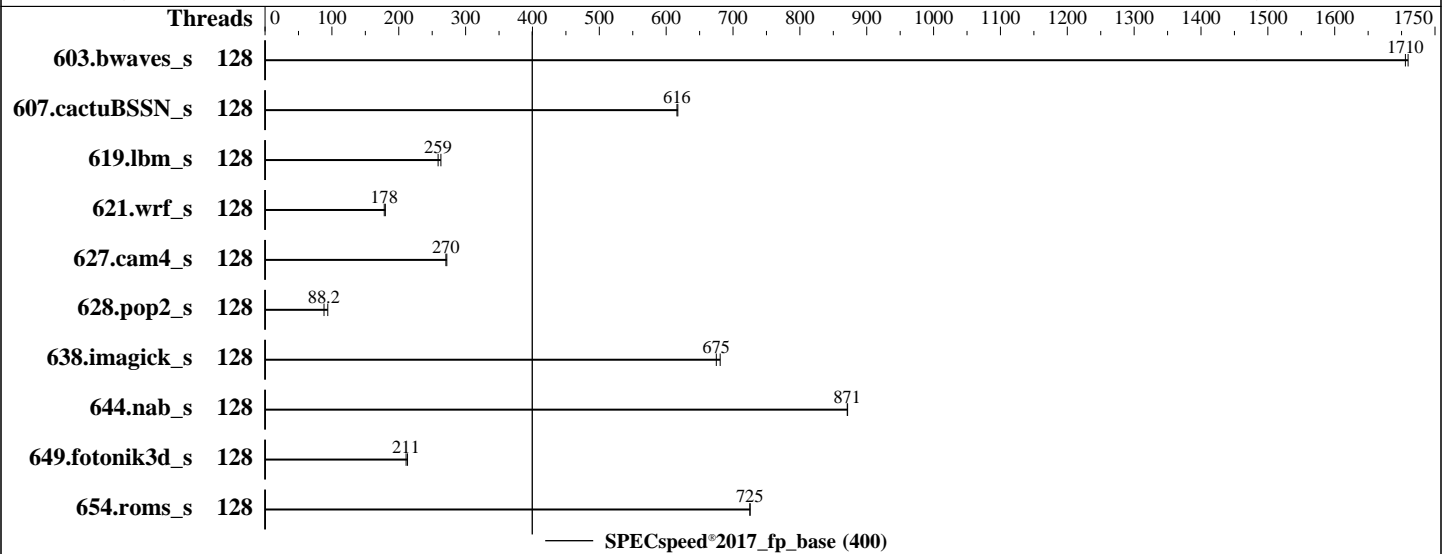

### Hardware

CPU Name: AMD EPYC 9534  
 Max MHz: 3700  
 Nominal: 2450  
 Enabled: 128 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 5.15.0-60-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.3.7 released Mar-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2023  
Hardware Availability: May-2023  
Software Availability: Feb-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	34.5	1710	<b><u>34.6</u></b>	<b><u>1710</u></b>									
607.cactuBSSN_s	128	<b><u>27.1</u></b>	<b><u>616</u></b>	27.0	617									
619.lbm_s	128	19.9	263	<b><u>20.2</u></b>	<b><u>259</u></b>									
621.wrf_s	128	73.5	180	<b><u>74.2</u></b>	<b><u>178</u></b>									
627.cam4_s	128	<b><u>32.8</u></b>	<b><u>270</u></b>	32.6	272									
628.pop2_s	128	<b><u>135</u></b>	<b><u>88.2</u></b>	127	93.8									
638.imagick_s	128	<b><u>21.4</u></b>	<b><u>675</u></b>	21.2	681									
644.nab_s	128	<b><u>20.1</u></b>	<b><u>871</u></b>	20.1	871									
649.fotonik3d_s	128	<b><u>43.2</u></b>	<b><u>211</u></b>	42.8	213									
654.roms_s	128	21.7	726	<b><u>21.7</u></b>	<b><u>725</u></b>									

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

## Operating System Notes (Continued)

To disable THP for peak runs of 621.wrf\_s:  
 'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
 run as root.

To enable THP only on request for peak runs of 654.roms\_s:  
 'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
 run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

- DRAM Refresh Delay : Performance
- DIMM Self Healing on
- Uncorrectable Memory Error : Disabled
- Logical Processor : Disabled
- Virtualization Technology : Disabled
- L3 Cache as NUMA Domain : Enabled
- System Profile : Custom
- C-States : Disabled
- Memory Patrol Scrub : Disabled
- PCI ASPM L1 Link
- Power Management : Disabled
- Determinism Slider : Power Determinism
- Algorithm Performance
- Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

## Platform Notes (Continued)

running on ubuntu-genoa Thu Mar 9 21:55:12 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent\_hugepage
- 19. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux ubuntu-genoa 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
 21:55:12 up 2:00, 1 user, load average: 6.86, 6.13, 3.54
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1      -             20:22       1:10m      1.79s      0.45s      /bin/bash ./amd_speed_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                 6190427
nofiles                1024
vmemory(kbytes)        unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

## Platform Notes (Continued)

locks unlimited  
rtprio 0

```

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-specspeed.sh --output_format csv,html,pdf,txt -define
Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 fpspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 --nopower
--runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9534 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9534 64-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2023  
Hardware Availability: May-2023  
Software Availability: Feb-2023

## Platform Notes (Continued)

```

Core(s) per socket:      64
Socket(s):              2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:          3718.0659
CPU min MHz:          1500.0000
BogoMIPS:             4901.77
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                    popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                    avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                    lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                    pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                    umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization:      AMD-V
L1d cache:          4 MiB (128 instances)
L1i cache:          4 MiB (128 instances)
L2 cache:           128 MiB (128 instances)
L3 cache:           512 MiB (16 instances)
NUMA node(s):       2
NUMA node0 CPU(s): 0-63
NUMA node1 CPU(s): 64-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                    filling, PBRSE-eIBRS Not affected

Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-63
node 0 size: 773654 MB
node 0 free: 771918 MB
node 1 cpus: 64-127
node 1 size: 774063 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

## Platform Notes (Continued)

node 1 free: 768179 MB

node distances:

```
node 0 1
0: 10 32
1: 32 10
```

9. /proc/meminfo

MemTotal: 1584863156 kB

10. who -r

run-level 5 Mar 9 19:57

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)

Default Target Status  
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* systemd-networkd-wait-online.service	loaded	failed	failed	Wait for Network to be Configured

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync upower
generated	apport
indirect	uuuid
masked	cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/vmlinuz-5.15.0-60-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

15. cpupower frequency-info

analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.45 GHz.  
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

## Platform Notes (Continued)

Pstate-P0: 2450MHz

-----  
16. tuned-adm active  
Current active profile: latency-performance  
-----

-----  
17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 3  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1  
-----

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.1 LTS  
-----

-----  
21. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 125G 3.5G 122G 3% /mnt/ramdisk  
-----

-----  
22. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R7625  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6573

**Test Date:** Mar-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** May-2023

**Tested by:** Dell Inc.

**Software Availability:** Feb-2023

## Platform Notes (Continued)

Product Family: PowerEdge  
Serial: 1234567

### 23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

2x 80CE000080CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800  
22x 80CE000080CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.3.7  
BIOS Date: 03/06/2023  
BIOS Revision: 1.3

## Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2023  
Hardware Availability: May-2023  
Software Availability: Feb-2023

## Compiler Version Notes (Continued)

-----  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECspeed®2017\_fp\_base = 400

PowerEdge R7625 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6573

**Test Date:** Mar-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** May-2023

**Tested by:** Dell Inc.

**Software Availability:** Feb-2023

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-09 16:55:12-0500.

Report generated on 2023-05-09 15:56:49 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.