



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

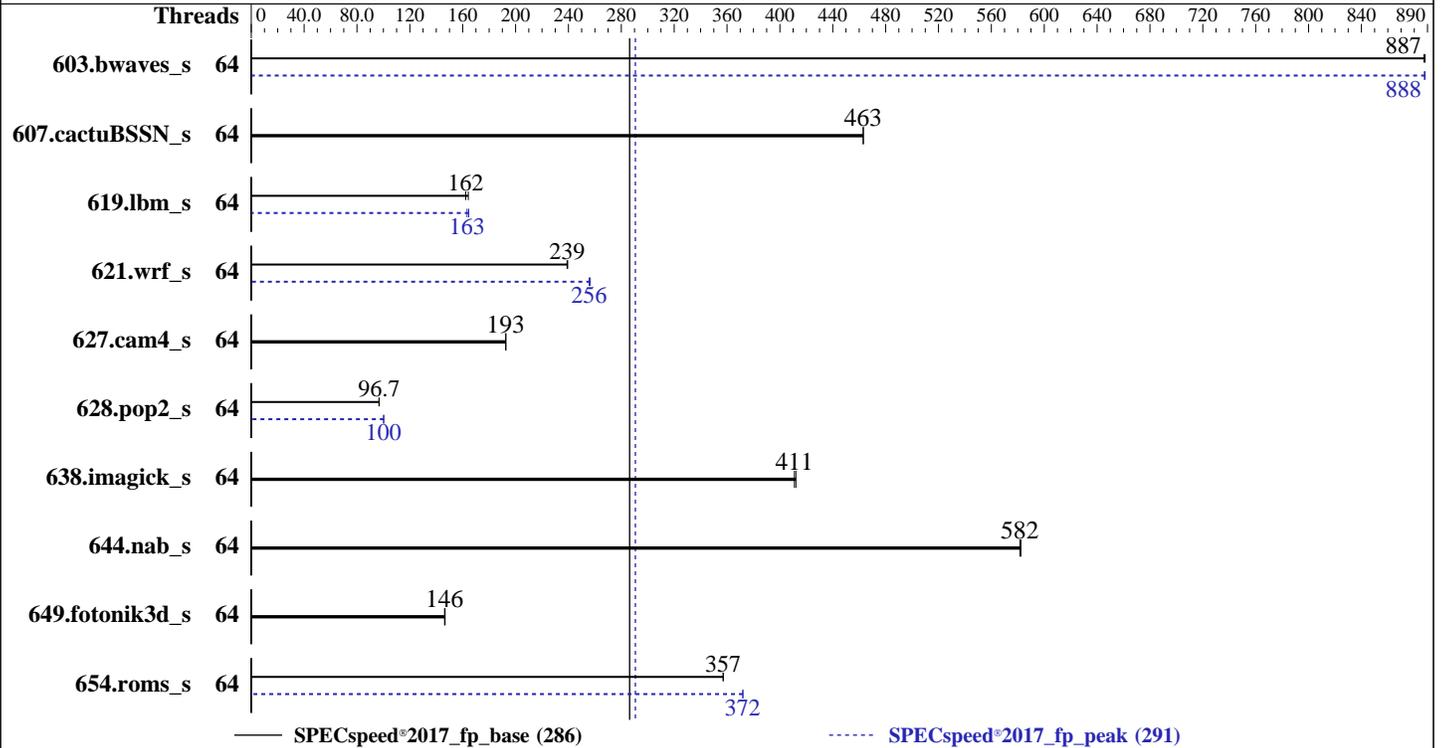

### Hardware

CPU Name: AMD EPYC 9534  
 Max MHz: 3700  
 Nominal: 2450  
 Enabled: 64 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 5.15.0-46-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.1.0 released Nov-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2023  
Hardware Availability: Mar-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<b><u>66.5</u></b>	<b><u>887</u></b>	66.4	888			64	66.4	888	<b><u>66.5</u></b>	<b><u>888</u></b>		
607.cactuBSSN_s	64	36.0	463	<b><u>36.0</u></b>	<b><u>463</u></b>			64	36.0	463	<b><u>36.0</u></b>	<b><u>463</u></b>		
619.lbm_s	64	31.9	164	<b><u>32.3</u></b>	<b><u>162</u></b>			64	<b><u>32.1</u></b>	<b><u>163</u></b>	31.8	165		
621.wrf_s	64	<b><u>55.3</u></b>	<b><u>239</u></b>	55.2	239			64	<b><u>51.7</u></b>	<b><u>256</u></b>	51.6	257		
627.cam4_s	64	<b><u>46.0</u></b>	<b><u>193</u></b>	46.0	193			64	<b><u>46.0</u></b>	<b><u>193</u></b>	46.0	193		
628.pop2_s	64	123	96.8	<b><u>123</u></b>	<b><u>96.7</u></b>			64	<b><u>119</u></b>	<b><u>100</u></b>	118	100		
638.imagick_s	64	<b><u>35.1</u></b>	<b><u>411</u></b>	35.0	412			64	<b><u>35.1</u></b>	<b><u>411</u></b>	35.0	412		
644.nab_s	64	30.0	582	<b><u>30.0</u></b>	<b><u>582</u></b>			64	30.0	582	<b><u>30.0</u></b>	<b><u>582</u></b>		
649.fotonik3d_s	64	62.1	147	<b><u>62.3</u></b>	<b><u>146</u></b>			64	62.1	147	<b><u>62.3</u></b>	<b><u>146</u></b>		
654.roms_s	64	44.1	357	<b><u>44.1</u></b>	<b><u>357</u></b>			64	42.3	372	<b><u>42.3</u></b>	<b><u>372</u></b>		

SPECspeed®2017\_fp\_base = 286

SPECspeed®2017\_fp\_peak = 291

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

```
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42 11 43 12 44 13 45 14 46 15 47
16 48 17 49 18 50 19 51 20 52 21 53 22 54 23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:  
 DRAM Refresh Delay : Performance

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

DIMM Self Healing on  
 Uncorrectable Memory Error : Disabled  
     Logical Processor : Disabled  
 Virtualization Technology : Disabled  
     L3 Cache as NUMA Domain : Enabled

    System Profile : Custom  
       C-States : Disabled  
     Memory Patrol Scrub : Disabled  
     PCI ASPM L1 Link  
       Power Management : Disabled  
       Determinism Slider : Power Determinism  
 Algorithm Performance  
     Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on amd-sut Wed Mar 22 21:24:45 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a  
 Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
 21:24:45 up 2:23, 1 user, load average: 6.27, 5.34, 3.15  

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	ttyl	-	19:04	2:19m	1.82s	0.40s	/bin/bash ./amd_speed_aocc400_genoa_B1.sh

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECSpeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                3092407
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-specspeed.sh --output_format csv,html,pdf,txt -define
Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 2 --output_format
csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 fpspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 2 --output_format
csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e

```

### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9534 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 64
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9534 64-Core Processor
CPU family:            25
Model:                  17
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3719.0000
CPU min MHz:           400.0000
BogoMIPS:               4901.34
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cpc arat npt
                        lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             2 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              64 MiB (64 instances)
L3 cache:              256 MiB (8 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                        filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECSpeed®2017\_fp\_peak = 291

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

L1i	32K	2M	8 Instruction	1	64	1	64
L2	1M	64M	8 Unified	2	2048	1	64
L3	32M	256M	16 Unified	3	32768	1	64

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 773213 MB
node 0 free: 768487 MB
node distances:
node 0
0: 10
```

```
9. /proc/meminfo
MemTotal: 791770156 kB
```

```
10. who -r
run-level 3 Mar 22 19:03
```

```
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
Default Target Status
multi-user degraded
```

```
12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
```

```
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled blk-availability console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors networkd-dispatcher
open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd
systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds
ubuntu-advantage udisks2 vgauth wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-networkd-wait-online systemd-remount-fs
disabled ModemManager apparmor console-getty debug-shell iscsid lvm2-monitor lxd-agent multipathd
nftables rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync ufw upower wpa_supplicant-nl80211@
wpa_supplicant-wired@ wpa_supplicant@
generated apport
indirect uidd
masked NetworkManager NetworkManager-dispatcher NetworkManager-wait-online cryptdisks
cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common
```

```
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-46-generic
root=UUID=593ab29a-c8fe-4d75-821a-b60d5c945311
ro
```

```
15. cpupower frequency-info
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECSpeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

analyzing CPU 0:

current policy: frequency should be within 400 MHz and 3.72 GHz.  
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2450MHz

-----  
16. tuned-adm active  
Current active profile: latency-performance

-----  
17. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 3  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.1 LTS  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

### 21. Disk information

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.5G 122G   3% /mnt/ramdisk

```

### 22. /sys/devices/virtual/dmi/id

```

Vendor:          Dell Inc.
Product:         PowerEdge R7615
Product Family: PowerEdge
Serial:          RDB5009

```

### 23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  12x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

```

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      Dell Inc.
BIOS Version:     1.1.0
BIOS Date:        11/25/2022
BIOS Revision:    1.1

```

## Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECSpeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 286

PowerEdge R7615 (AMD EPYC 9534 64-Core Processor)

SPECspeed®2017\_fp\_peak = 291

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 17:24:45-0400.

Report generated on 2023-05-09 15:58:43 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.