



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

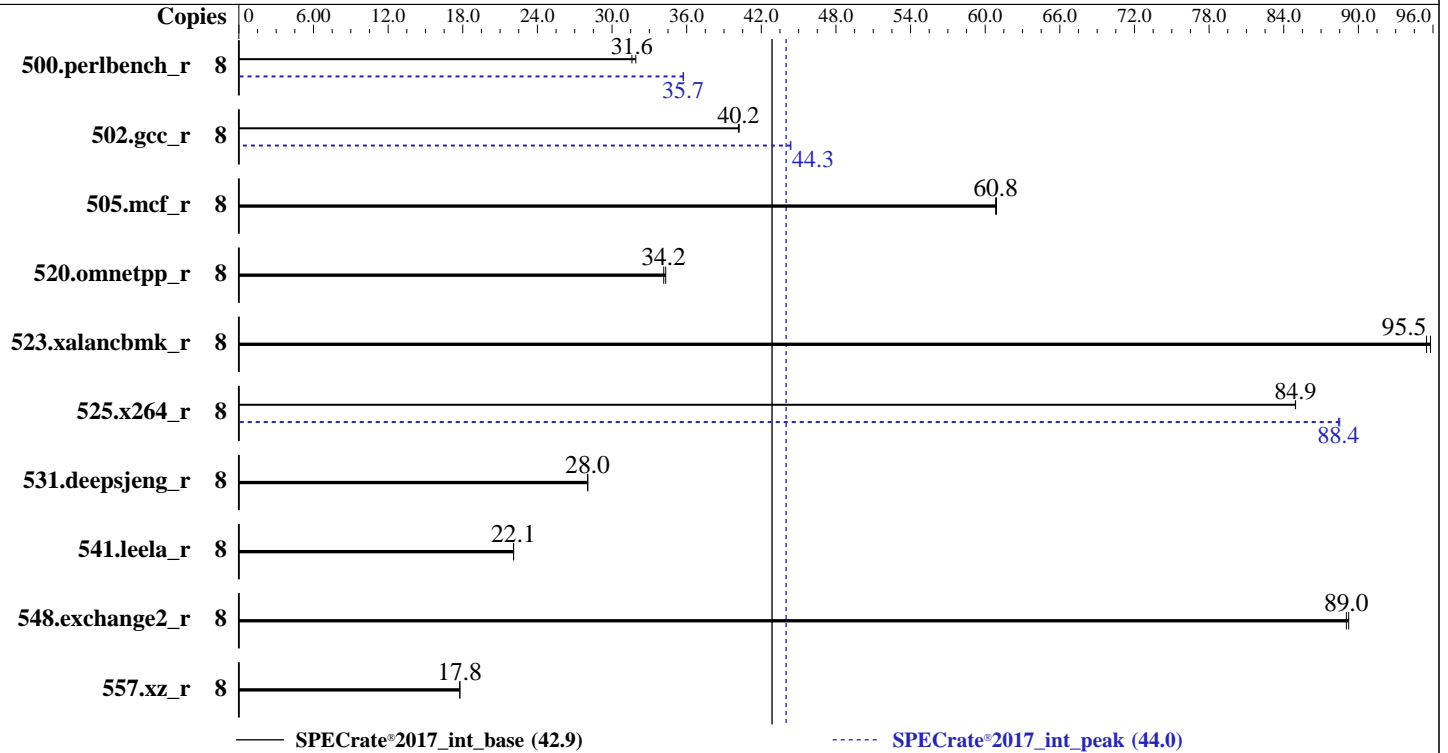

Hardware

CPU Name: Intel Xeon Bronze 3408U
 Max MHz: 1900
 Nominal: 1800
 Enabled: 8 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 0.4.6 released Jan-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	403	31.6	399	31.9			8	356	35.7	357	35.7		
502.gcc_r	8	282	40.2	282	40.2			8	255	44.4	256	44.3		
505.mcf_r	8	212	60.9	212	60.8			8	212	60.9	212	60.8		
520.omnetpp_r	8	307	34.2	306	34.3			8	307	34.2	306	34.3		
523.xalancbmk_r	8	88.2	95.8	88.5	95.5			8	88.2	95.8	88.5	95.5		
525.x264_r	8	165	84.9	165	85.0			8	158	88.4	158	88.5		
531.deepsjeng_r	8	327	28.1	327	28.0			8	327	28.1	327	28.0		
541.leela_r	8	600	22.1	600	22.1			8	600	22.1	600	22.1		
548.exchange2_r	8	235	89.0	235	89.2			8	235	89.0	235	89.2		
557.xz_r	8	487	17.8	486	17.8			8	487	17.8	486	17.8		

SPECrate®2017_int_base = **42.9**

SPECrate®2017_int_peak = **44.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
      Uncorrectable Memory Error : Disabled
      Virtualization Technology : Disabled
      DCU Streamer Prefetcher : Disabled
      Sub NUMA Cluster : 2-way Clustering
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      CLE : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled
  
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Apr 6 08:37:51 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 08:37:51 up 2 min,  1 user,  load average: 0.79, 0.53, 0.22
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root     tty1      -              08:36   55.00s  1.81s  0.00s  /bin/bash ./dell-run-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define
Dell-BIOS-LogProcD=1

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2060385
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060385
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-specrate.sh --iterations 2 --output_format csv,html,pdf,txt -define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
/bin/bash ./dell-run-specrate.sh --iterations 2 --output_format csv,html,pdf,txt -define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=8 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=8 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --output_format
  csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1 intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=8 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=8 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
  --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Bronze 3408U
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings       : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 8
On-line CPU(s) list:   0-7
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Bronze 3408U
CPU family:             6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    8
Socket(s):              1
Stepping:              8
BogoMIPS:              3600.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 flush_lld arch_capabilities
```

```
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 22.5 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6
NUMA node1 CPU(s): 1,3,5,7
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	22.5M	22.5M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0,2,4,6
node 0 size: 257426 MB
node 0 free: 247980 MB
node 1 cpus: 1,3,5,7
node 1 size: 257693 MB
node 1 free: 257236 MB
node distances:
node 0 1
0: 10 12
1: 12 10
```

9. /proc/meminfo

```
MemTotal: 527483012 kB
```

10. who -r

```
run-level 3 Apr 6 08:35
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target      Status
    multi-user          running
-----
```

```
-----
12. Services, from systemctl list-unit-files
    STATE              UNIT FILES
    enabled            YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
    haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
    postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
    wickedd-dhcp6 wickedd-nanny
    enabled-runtime    systemd-remount-fs
    disabled           autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
    chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
    grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
    man-db-create multipathd netlabel nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
    serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
    systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd tuned
    indirect           pcsd wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=d875d5f3-9851-4c06-aa6e-ec895dcbbb52
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
    crashkernel=306M,high
    crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
    Unable to determine current policy
    boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
    No current active profile.
-----
```

```
-----
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 20
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages               0
    vm.nr_hugepages_mempolicy     0
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs      tmpfs 125G 4.2G 121G  4% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge
Serial:      SL6C201

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4000

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     0.4.6
BIOS Date:        01/31/2023
BIOS Revision:    0.4

```




SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 42.9

PowerEdge C6620 (Intel Xeon Bronze 3408U)

SPECrate®2017_int_peak = 44.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-06 08:37:50-0400.

Report generated on 2024-01-29 17:48:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.