



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11


(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

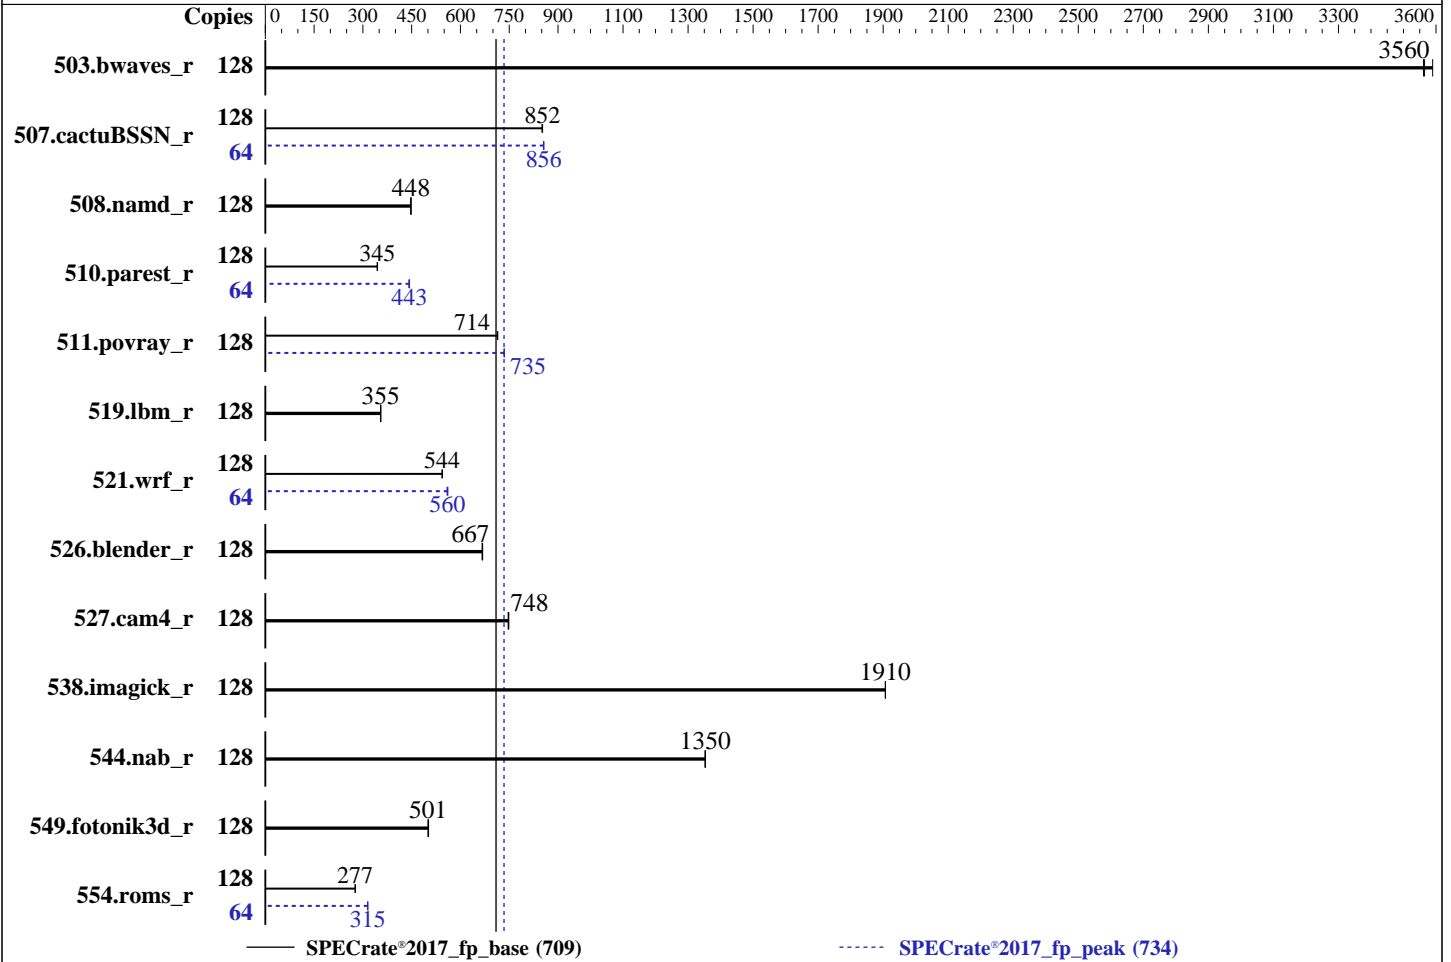

Hardware

CPU Name: Intel Xeon Gold 6448Y
 Max MHz: 4100
 Nominal: 2100
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	358	3590	<u>360</u>	<u>3560</u>	360	3560	128	358	3590	<u>360</u>	<u>3560</u>	360	3560
507.cactuBSSN_r	128	190	851	<u>190</u>	<u>852</u>	190	853	64	<u>94.6</u>	<u>856</u>	94.7	855	94.6	856
508.namd_r	128	271	448	<u>272</u>	<u>448</u>	272	448	128	271	448	<u>272</u>	<u>448</u>	272	448
510.parest_r	128	974	344	<u>971</u>	<u>345</u>	970	345	64	<u>378</u>	<u>443</u>	379	441	377	444
511.povray_r	128	<u>419</u>	<u>714</u>	419	714	418	715	128	407	734	<u>407</u>	<u>735</u>	407	735
519.lbm_r	128	<u>380</u>	<u>355</u>	380	355	381	354	128	<u>380</u>	<u>355</u>	380	355	381	354
521.wrf_r	128	526	545	<u>527</u>	<u>544</u>	528	543	64	255	561	257	559	<u>256</u>	<u>560</u>
526.blender_r	128	292	668	292	667	<u>292</u>	<u>667</u>	128	292	668	292	667	<u>292</u>	<u>667</u>
527.cam4_r	128	299	748	<u>299</u>	<u>748</u>	300	747	128	299	748	<u>299</u>	<u>748</u>	300	747
538.imagick_r	128	167	1910	167	1910	<u>167</u>	<u>1910</u>	128	167	1910	167	1910	<u>167</u>	<u>1910</u>
544.nab_r	128	159	1350	159	1350	<u>159</u>	<u>1350</u>	128	159	1350	159	1350	<u>159</u>	<u>1350</u>
549.fotonik3d_r	128	994	502	997	501	<u>996</u>	<u>501</u>	128	994	502	997	501	<u>996</u>	<u>501</u>
554.roms_r	128	<u>735</u>	<u>277</u>	734	277	737	276	64	<u>323</u>	<u>315</u>	323	315	323	315

SPECrate®2017_fp_base = **709**

SPECrate®2017_fp_peak = **734**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Gold 6448Y processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance Profile set to Aggressive
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to Custom
DCU Stream Prefetcher set to Disabled
Adjacent Sector Prefetch set to Disabled
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Apr 12 04:20:04 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. `w`
04:20:04 up 15 min, 0 users, load average: 0.00, 0.10, 0.27
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062779
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062779
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. `/proc/cpuinfo`
model name : Intel(R) Xeon(R) Gold 6448Y
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 8

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6448Y
BIOS Model name:       Intel(R) Xeon(R) Gold 6448Y
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-31,64-95
NUMA node1 CPU(s):    32-63,96-127
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 257711 MB
node 0 free: 256571 MB
node 1 cpus: 32-63,96-127
node 1 size: 258023 MB
node 1 free: 257223 MB
node distances:
node 0 1
0: 10 20
1: 20 10

9. /proc/meminfo

MemTotal: 528112280 kB

10. who -r

run-level 3 Apr 12 04:04

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	82G	737G	10%	/home

20. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:    ProLiant DL360 Gen11
Product Family: ProLiant
Serial:     CNX2070DC1
```

21. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x Hynix HMC88MEB8A113N 32 GB 2 rank 4800
4x Hynix HMC88MEB8A115N 32 GB 2 rank 4800
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     1.30
BIOS Date:        03/01/2023
BIOS Revision:    1.30
Firmware Revision: 1.20
```

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6448Y)

SPECrate®2017_fp_base = 709

SPECrate®2017_fp_peak = 734

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-11 18:50:04-0400.

Report generated on 2023-06-20 23:24:12 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.