



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573


Test Date: Apr-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

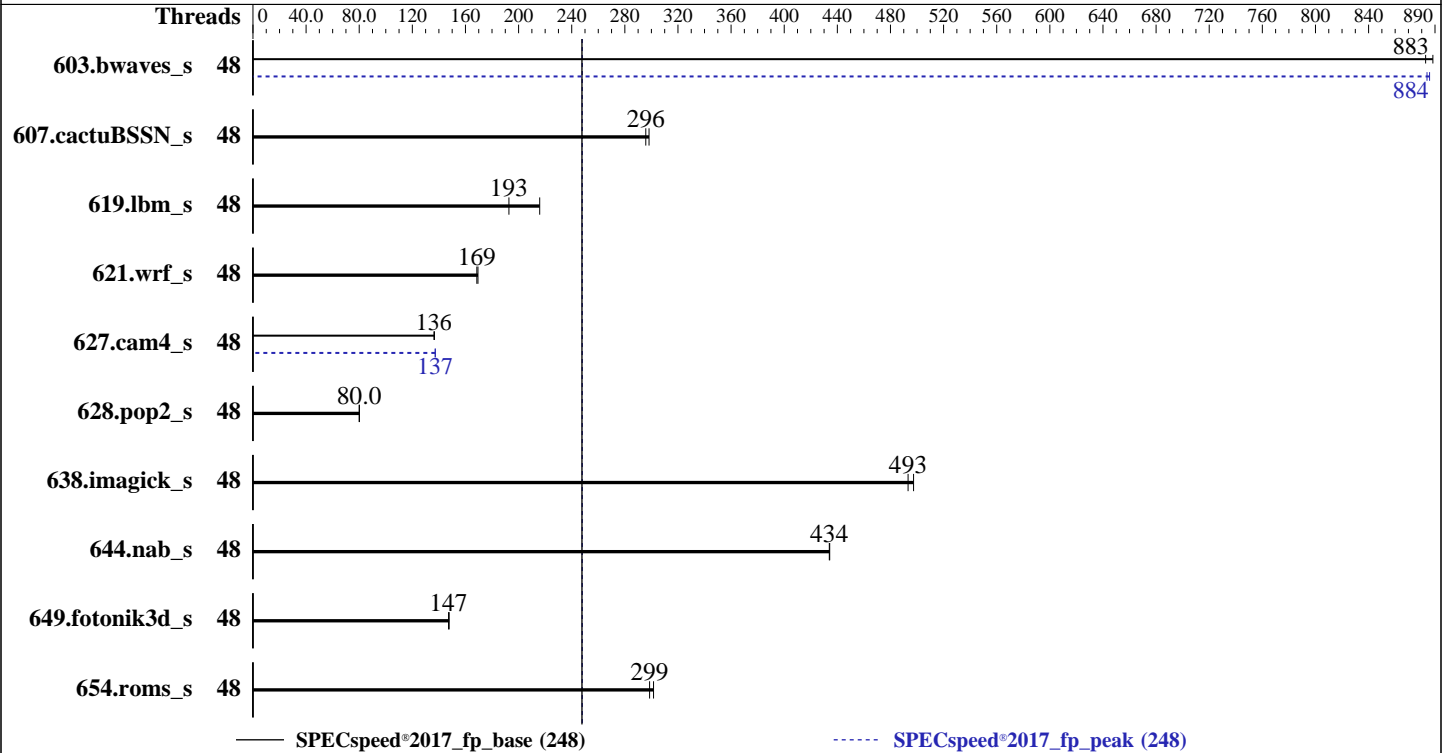

Hardware

CPU Name: Intel Xeon Gold 5418Y
 Max MHz: 3800
 Nominal: 2000
 Enabled: 48 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 1.0.0 released Mar-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECSpeed®2017_fp_peak = 248

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	66.4	888	<u>66.8</u>	<u>883</u>			48	66.6	886	<u>66.7</u>	<u>884</u>		
607.cactuBSSN_s	48	<u>56.4</u>	<u>296</u>	55.9	298			48	<u>56.4</u>	<u>296</u>	55.9	298		
619.lbm_s	48	24.3	216	<u>27.2</u>	<u>193</u>			48	24.3	216	<u>27.2</u>	<u>193</u>		
621.wrf_s	48	78.1	169	<u>78.5</u>	<u>169</u>			48	78.1	169	<u>78.5</u>	<u>169</u>		
627.cam4_s	48	<u>65.0</u>	<u>136</u>	64.9	137			48	64.5	137	<u>64.6</u>	<u>137</u>		
628.pop2_s	48	148	80.2	<u>149</u>	<u>80.0</u>			48	148	80.2	<u>149</u>	<u>80.0</u>		
638.imagick_s	48	<u>29.2</u>	<u>493</u>	29.0	497			48	<u>29.2</u>	<u>493</u>	29.0	497		
644.nab_s	48	40.2	434	<u>40.3</u>	<u>434</u>			48	40.2	434	<u>40.3</u>	<u>434</u>		
649.fotonik3d_s	48	61.7	148	<u>61.9</u>	<u>147</u>			48	61.7	148	<u>61.9</u>	<u>147</u>		
654.roms_s	48	<u>52.7</u>	<u>299</u>	52.2	302			48	<u>52.7</u>	<u>299</u>	52.2	302		

SPECSpeed®2017_fp_base = 248

SPECSpeed®2017_fp_peak = 248

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

ADDDC Setting : Disabled
 DIMM Self Healing on
 Uncorrectable Memory Error : Disabled
 Logical Processor : Disabled
 Virtualization Technology : Disabled
 Sub NUMA Cluster : 2-way Clustering
 Optimizer Mode : Enabled

System Profile : Custom
 CPU Power Management : Maximum Performance
 C1E : Disabled
 C States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficiency Policy : Performance
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost-spa-1 Tue Apr 18 01:42:28 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost-spa-1 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
01:42:28 up 2:23, 1 user, load average: 5.77, 5.92, 3.53
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             23:20   2:21m 1.23s  0.00s /bin/bash ./dell-run-specspeed.sh
--iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2060277
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060277
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
/bin/bash ./dell-run-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
runcpu --nobuild --action validate --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak -o all --define drop_caches --iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1 fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak --output_format all --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1 --nopower --runmode speed --tune base:peak --size refspped fpspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templots/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5418Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
stepping          : 8
microcode         : 0x2b0001b0
bugs              : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores         : 24
siblings          : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             48
On-line CPU(s) list: 0-47
Vendor ID:          GenuineIntel
Model name:         Intel(R) Xeon(R) Gold 5418Y
CPU family:         6
Model:              143
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s):          2
Stepping:           8
BogoMIPS:           4000.00
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                   cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                   avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                   arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                   vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                   bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                   tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:         2.3 MiB (48 instances)
L1i cache:         1.5 MiB (48 instances)
L2 cache:          96 MiB (48 instances)
L3 cache:          90 MiB (2 instances)
NUMA node(s):      4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Lltf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44
node 0 size: 128401 MB
node 0 free: 127286 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46
node 1 size: 129020 MB
node 1 free: 113586 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45
node 2 size: 128986 MB
node 2 free: 128627 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47
node 3 size: 128685 MB
node 3 free: 128419 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 527455552 kB

10. who -r

run-level 3 Apr 17 23:20

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* nmb.service	loaded	failed	failed	Samba NMB Daemon

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Date: Apr-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```

enabled      YaST2-Firstboot YaST2-Second-Stage apparmor auditd avahi-daemon bluetooth cron
display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump
kdump-early klog lvm2-monitor nmb nscd postfix purge-kernels rollback rsyslog smartd smb
sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime  systemd-remount-fs
disabled        accounts-daemon appstream-sync-cache autofs autoyast-initscripts avahi-dnsconfd
blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd
console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm
grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
upower

indirect       wickedd

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=6ffe7499-98f8-44df-af80-649be1e7136a
splash=silent
resume=/dev/disk/by-uuid/780791c2-a58b-4181-8bae-2afdf293ebb6
mitigations=auto
quiet
security=apparmor
crashkernel=316M,high
crashkernel=72M,low

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs      tmpfs 125G 11G 115G 9% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R760xa
Product Family: PowerEdge
Serial:      1234567

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x 002C00B3002C MTC20F2085S1RC48BA1 32 GB 2 rank 4800, configured at 4400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.0.0
BIOS Date:        03/10/2023
BIOS Revision:    1.0

```

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 248

PowerEdge R760xa (Intel Xeon Gold 5418Y)

SPECspeed®2017_fp_peak = 248

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-17 13:42:27-0400.

Report generated on 2023-07-05 11:00:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-04.