



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 148

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

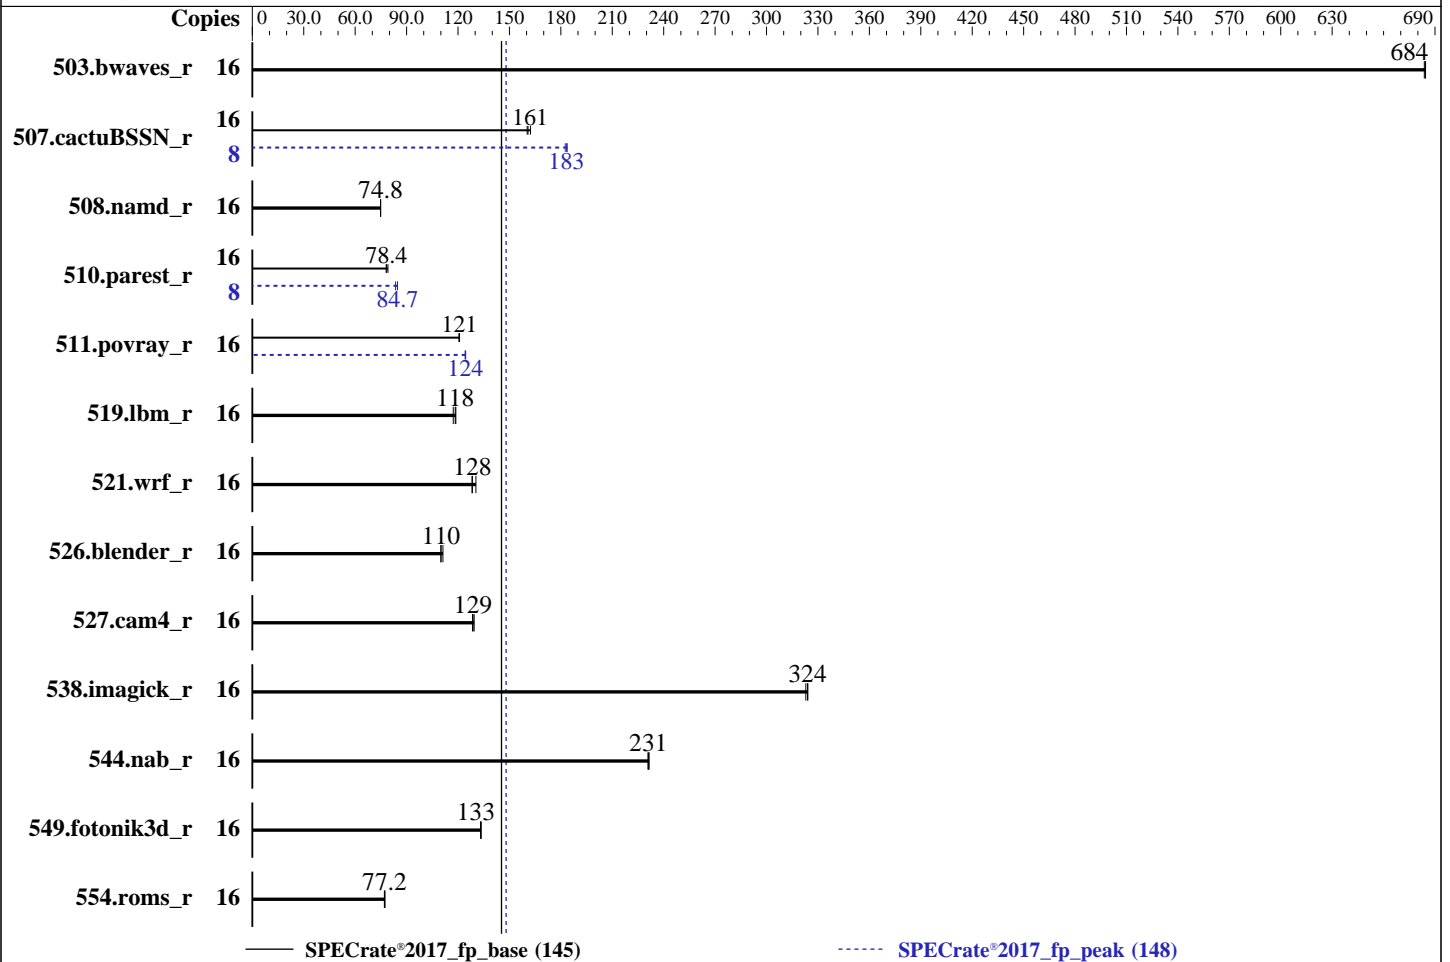

Hardware

CPU Name: Intel Xeon Gold 6434
 Max MHz: 4100
 Nominal: 3700
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.40 05/18/2023 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 148

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	235	684	<u>234</u>	<u>684</u>	234	684	16	235	684	<u>234</u>	<u>684</u>	234	684
507.cactuBSSN_r	16	<u>126</u>	<u>161</u>	126	160	125	162	8	<u>55.2</u>	<u>183</u>	55.1	184	55.5	183
508.namd_r	16	203	74.8	<u>203</u>	<u>74.8</u>	203	74.8	16	203	74.8	<u>203</u>	<u>74.8</u>	203	74.8
510.parest_r	16	<u>534</u>	<u>78.4</u>	529	79.1	536	78.1	8	250	83.6	247	84.7	<u>247</u>	<u>84.7</u>
511.povray_r	16	309	121	<u>309</u>	<u>121</u>	310	121	16	300	124	301	124	<u>301</u>	<u>124</u>
519.lbm_r	16	144	117	<u>142</u>	<u>118</u>	142	119	16	144	117	<u>142</u>	<u>118</u>	142	119
521.wrf_r	16	<u>279</u>	<u>128</u>	280	128	275	130	16	<u>279</u>	<u>128</u>	280	128	275	130
526.blender_r	16	219	111	<u>221</u>	<u>110</u>	222	110	16	219	111	<u>221</u>	<u>110</u>	222	110
527.cam4_r	16	216	129	218	128	<u>217</u>	<u>129</u>	16	216	129	218	128	<u>217</u>	<u>129</u>
538.imagick_r	16	123	323	123	324	<u>123</u>	<u>324</u>	16	123	323	123	324	<u>123</u>	<u>324</u>
544.nab_r	16	117	231	<u>117</u>	<u>231</u>	116	232	16	117	231	<u>117</u>	<u>231</u>	116	232
549.fotonik3d_r	16	468	133	<u>468</u>	<u>133</u>	467	133	16	468	133	<u>468</u>	<u>133</u>	467	133
554.roms_r	16	330	77.0	<u>329</u>	<u>77.2</u>	329	77.4	16	330	77.0	<u>329</u>	<u>77.2</u>	329	77.4

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 148

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0004a1 for the Intel Xeon Gold 6434 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute
 Thermal Configuration set to Maximum Cooling
 Enhanced Processor Performance Profile set to Aggressive
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to Custom
 DCU Stream Prefetcher set to Disabled
 Adjacent Sector Prefetch set to Disabled
 Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/CPU2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri Jun 23 10:20:01 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017_fp_base = 145

SPECrate®2017_fp_peak = 148

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

- ```

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
10:20:01 up 4 min, 0 users, load average: 0.00, 0.00, 0.00
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable $USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1029838
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1029838
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=8 --define physicalfirst
--define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=8 --define physicalfirst
--define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6434
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 7
microcode : 0x2b0004a1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

**SPECrate®2017\_fp\_base = 145**

**SPECrate®2017\_fp\_peak = 148**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
bugs : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores : 8
siblings : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6434
BIOS Model name: Intel(R) Xeon(R) Gold 6434
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 1
Stepping: 7
BogoMIPS: 7400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
 split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
 avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
 avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
 arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 22.5 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

**SPECrate®2017\_fp\_base = 145**

**SPECrate®2017\_fp\_peak = 148**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

|                                |                                                                     |
|--------------------------------|---------------------------------------------------------------------|
| Vulnerability Spectre v1:      | Mitigation; usercopy/swaps barriers and __user pointer sanitization |
| Vulnerability Spectre v2:      | Mitigation; Enhanced IBRS, IBPB conditional, RSB filling            |
| Vulnerability Srbds:           | Not affected                                                        |
| Vulnerability Tsx async abort: | Not affected                                                        |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 384K     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 256K     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 16M      | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 22.5M    | 22.5M    | 15   | Unified     | 3     | 24576 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 257499 MB
node 0 free: 256717 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 263679376 kB

10. who -r

run-level 3 Jun 23 10:15

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

```

Default Target Status
multi-user running

```

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                             |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond<br>dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode<br>nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd<br>systemd-network-generator tuned udisks2                                           |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                     |
| disabled        | blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat<br>man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild<br>serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex<br>indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo |

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

(3.70 GHz, Intel Xeon Gold 6434)

**SPECrate®2017\_fp\_base = 145**

**SPECrate®2017\_fp\_peak = 148**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
analyzing CPU 0:
 Unable to determine current policy
boost state support:
 Supported: yes
 Active: yes
```

```

15. tuned-adm active
 Current active profile: throughput-performance
```

```

16. sysctl
 kernel.numa_balancing 0
 kernel.randomize_va_space 2
 vm.compaction_proactiveness 20
 vm.dirty_background_bytes 0
 vm.dirty_background_ratio 10
 vm.dirty_bytes 0
 vm.dirty_expire_centisecs 3000
 vm.dirty_ratio 40
 vm.dirty_writeback_centisecs 500
 vm.dirtytime_expire_seconds 43200
 vm.extfrag_threshold 500
 vm.min_unmapped_ratio 1
 vm.nr_hugepages 0
 vm.nr_hugepages_mempolicy 0
 vm.nr_overcommit_hugepages 0
 vm.swappiness 10
 vm.watermark_boost_factor 15000
 vm.watermark_scale_factor 10
 vm.zone_reclaim_mode 0
```

```

17. /sys/kernel/mm/transparent_hugepage
 defrag always defer defer+madvice [madvice] never
 enabled [always] madvice never
 hpage_pmd_size 2097152
 shmem_enabled always within_size advise [never] deny force
```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
 alloc_sleep_millisecs 60000
 defrag 1
 max_ptes_none 511
 max_ptes_shared 256
 max_ptes_swap 64
 pages_to_scan 4096
 scan_sleep_millisecs 10000
```

```

19. OS release
 From /etc/*-release /etc/*-version
 os-release Red Hat Enterprise Linux 9.0 (Plow)
 redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
 system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```

20. Disk information
SPEC is set to: /home/CPU2017
 Filesystem Type Size Used Avail Use% Mounted on
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017\_fp\_base = 145

SPECrate®2017\_fp\_peak = 148

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

/dev/mapper/rhel-home xfs 372G 183G 189G 50% /home

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant DL320 Gen11  
Product Family: ProLiant  
Serial: CNX2210H28  
-----

22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
4x Hynix HMC88AEBRA168N 32 GB 2 rank 4800  
4x Hynix HMC88MEBRA113N 32 GB 2 rank 4800  
-----

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 1.40  
BIOS Date: 05/18/2023  
BIOS Revision: 1.40  
Firmware Revision: 1.20  
-----

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017\_fp\_base = 145

SPECrate®2017\_fp\_peak = 148

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
 Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
 -----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
 Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
 -----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017\_fp\_base = 145

SPECrate®2017\_fp\_peak = 148

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Base Portability Flags (Continued)

```

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017\_fp\_base = 145

SPECrate®2017\_fp\_peak = 148

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

SPECrate®2017\_fp\_base = 145

SPECrate®2017\_fp\_peak = 148

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(3.70 GHz, Intel Xeon Gold 6434)

**SPECrate®2017\_fp\_base = 145**

**SPECrate®2017\_fp\_peak = 148**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-23 00:50:00-0400.

Report generated on 2023-07-19 16:28:10 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.