



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

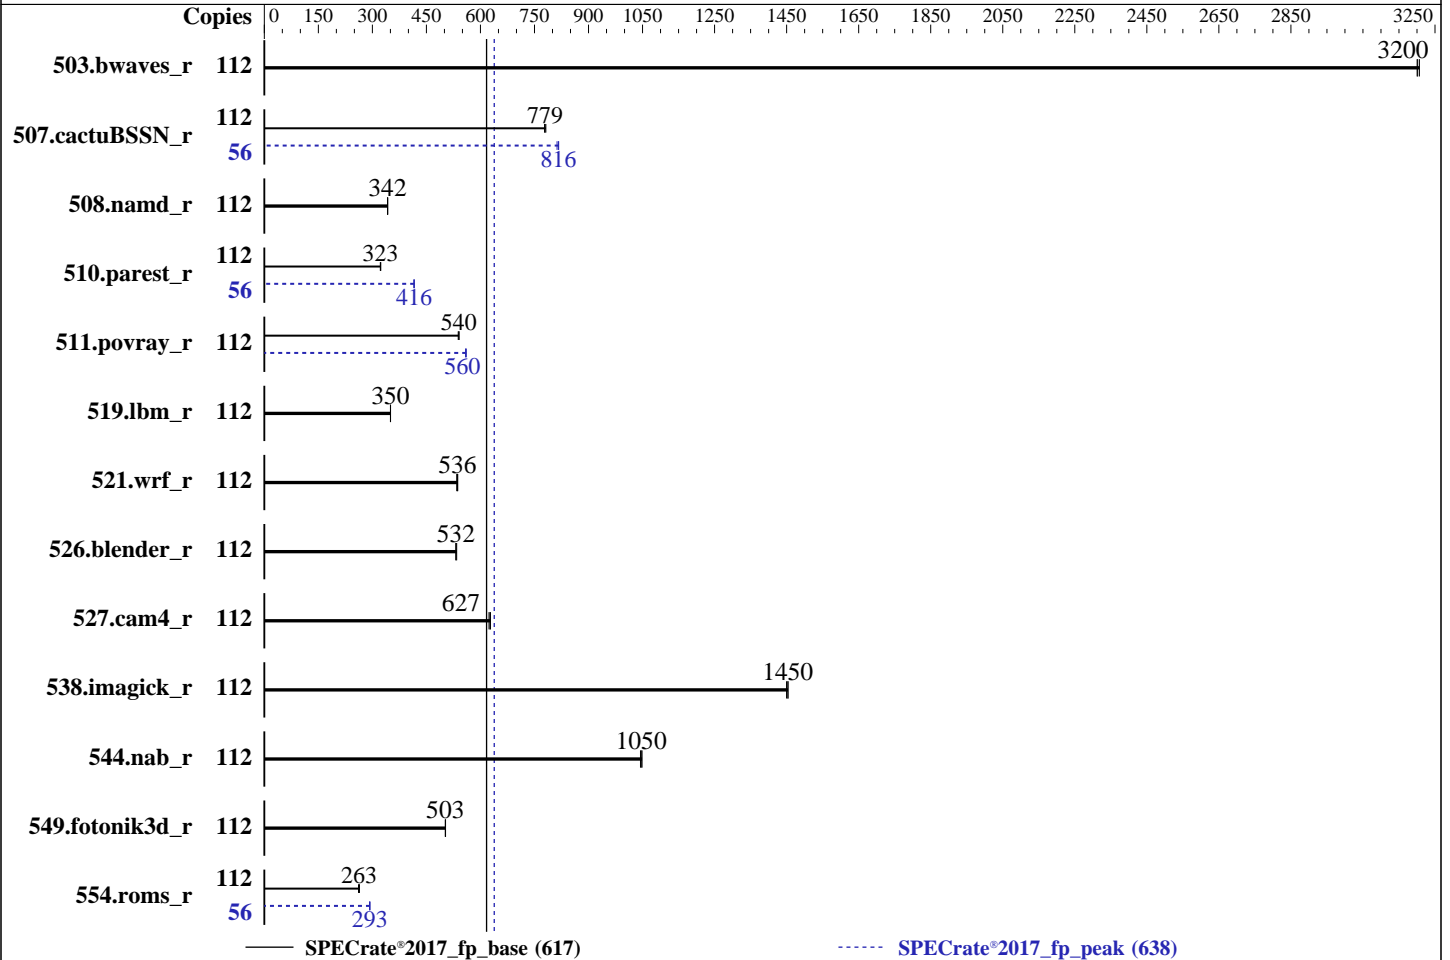

### Hardware

CPU Name: Intel Xeon Gold 5420+  
 Max MHz: 4100  
 Nominal: 2000  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 52.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)  
 Storage: 1 x 1.6 TB PCIe NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0701 released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	<u>351</u>	<u>3200</u>	351	3200	350	3210	112	<u>351</u>	<u>3200</u>	351	3200	350	3210
507.cactuBSSN_r	112	181	782	<u>182</u>	<u>779</u>	182	778	56	87.2	813	86.8	817	<u>86.8</u>	<u>816</u>
508.namd_r	112	311	342	<u>311</u>	<u>342</u>	311	343	112	311	342	<u>311</u>	<u>342</u>	311	343
510.parest_r	112	907	323	910	322	<u>908</u>	<u>323</u>	56	353	415	<u>352</u>	<u>416</u>	352	416
511.povray_r	112	484	540	486	538	<u>484</u>	<u>540</u>	112	468	559	<u>467</u>	<u>560</u>	467	560
519.lbm_r	112	337	350	337	350	<u>337</u>	<u>350</u>	112	337	350	337	350	<u>337</u>	<u>350</u>
521.wrf_r	112	<u>468</u>	<u>536</u>	467	537	470	534	112	<u>468</u>	<u>536</u>	467	537	470	534
526.blender_r	112	319	534	<u>321</u>	<u>532</u>	321	532	112	319	534	<u>321</u>	<u>532</u>	321	532
527.cam4_r	112	314	624	312	628	<u>313</u>	<u>627</u>	112	314	624	312	628	<u>313</u>	<u>627</u>
538.imagick_r	112	<u>192</u>	<u>1450</u>	192	1450	192	1450	112	<u>192</u>	<u>1450</u>	192	1450	192	1450
544.nab_r	112	181	1040	180	1050	<u>180</u>	<u>1050</u>	112	181	1040	180	1050	<u>180</u>	<u>1050</u>
549.fotonik3d_r	112	868	503	<u>868</u>	<u>503</u>	868	503	112	868	503	<u>868</u>	<u>503</u>	868	503
554.roms_r	112	<u>676</u>	<u>263</u>	681	261	674	264	56	303	293	305	292	<u>304</u>	<u>293</u>

SPECrate®2017\_fp\_base = **617**

SPECrate®2017\_fp\_peak = **638**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/cpull9/lib/intel64:/cpull9/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
 VT-d = Disabled  
 Patrol Scrub = Disabled  
 SNC = Enable SNC2 (2-clusters)  
 Engine Boost = Aggressive  
 SR-IOV Support = Disabled  
 BMC Configuration:  
 Fan mode = Full speed mode

Sysinfo program /cpul19/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Fri Jun 30 20:40:55 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 
1. uname -a  
 Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
 x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

2. w
 20:40:55 up 6:18, 2 users, load average: 77.78, 103.80, 108.47
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1  -             14:22   6:15m  0.90s  0.05s -bash
root  tty2  -             14:25   3:33m  0.03s  0.03s -bash

```

```

3. Username
  From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4126871
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4126871
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.588/templogs/preenv.fprate.588.0.log --lognum 588.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpull9

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5420+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 28
siblings      : 56
2 physical ids (chips)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

112 processors (hardware threads)

physical id 0: core ids 0-27

physical id 1: core ids 0-27

physical id 0: apicids 0-55

physical id 1: apicids 128-183

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       112
On-line CPU(s) list:         0-111
Vendor ID:                   GenuineIntel
Model name:                   Intel(R) Xeon(R) Gold 5420+
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          28
Socket(s):                    2
Stepping:                     8
CPU max MHz:                  4100.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4000.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                amx_tile flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   2.6 MiB (56 instances)
L1i cache:                   1.8 MiB (56 instances)
L2 cache:                     112 MiB (56 instances)
L3 cache:                     105 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-13,56-69
NUMA node1 CPU(s):           14-27,70-83
NUMA node2 CPU(s):           28-41,84-97
NUMA node3 CPU(s):           42-55,98-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

Vulnerability Meltdown: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	52.5M	105M	15	Unified	3	57344	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-13,56-69
node 0 size: 257682 MB
node 0 free: 241283 MB
node 1 cpus: 14-27,70-83
node 1 size: 258040 MB
node 1 free: 246340 MB
node 2 cpus: 28-41,84-97
node 2 size: 258040 MB
node 2 free: 246489 MB
node 3 cpus: 42-55,98-111
node 3 size: 257977 MB
node 3 free: 246460 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056503628 kB

10. who -r

run-level 3 Jun 30 14:22

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
nvmf-autocconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
snmpd snmptrapd svnserv systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect
wickedd

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor

```

-----  
14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4  
-----

19. Disk information  
SPEC is set to: /cpull9  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p8 xfs 1.3T 68G 1.2T 6% /  
-----

20. /sys/devices/virtual/dmi/id  
Vendor: ASUSTeK COMPUTER INC.  
Product: RS720-E11-RS12U  
Product Family: Server  
Serial: R1S0MD000002  
-----

21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4400  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0701  
BIOS Date: 05/02/2023  
BIOS Revision: 7.1  
-----

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

SPECrate®2017\_fp\_base = 617

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_peak = 638

CPU2017 License: 9016

Test Date: Jun-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5420+)

SPECrate®2017\_fp\_base = 617

SPECrate®2017\_fp\_peak = 638

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-30 08:40:54-0400.

Report generated on 2023-08-02 16:30:36 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.