



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

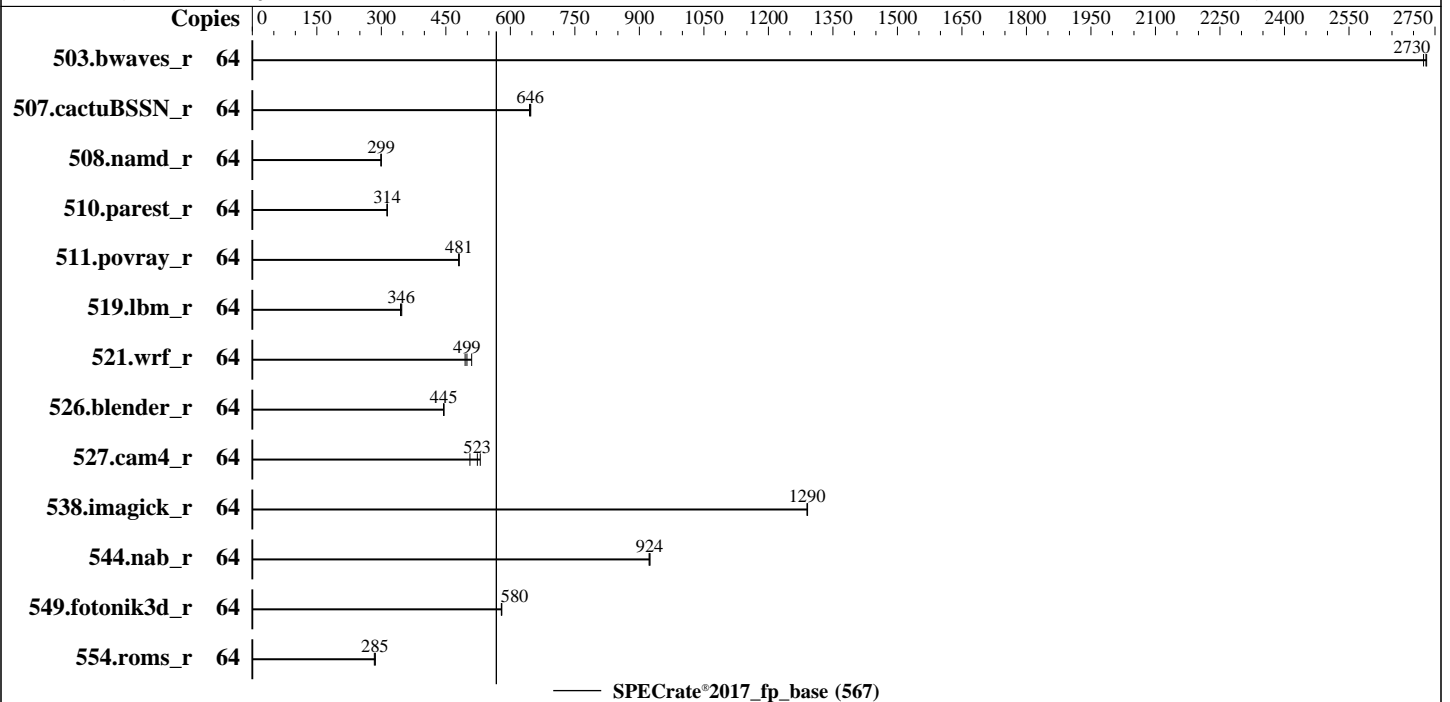

Hardware

CPU Name: Intel Xeon Gold 6434H
 Max MHz: 4100
 Nominal: 3700
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for
 D3986-A1x. Released Sep-2023
 tested as V1.0.0.0 R0.21.0 for D3986-A1x May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	236	2720	235	2730	<u>235</u>	<u>2730</u>							
507.cactuBSSN_r	64	125	647	<u>125</u>	<u>646</u>	126	644							
508.namd_r	64	203	300	203	299	<u>203</u>	<u>299</u>							
510.parest_r	64	534	313	<u>534</u>	<u>314</u>	534	314							
511.povray_r	64	<u>311</u>	<u>481</u>	311	480	311	481							
519.lbm_r	64	196	345	<u>195</u>	<u>346</u>	194	347							
521.wrf_r	64	<u>287</u>	<u>499</u>	290	495	281	510							
526.blender_r	64	219	446	219	445	<u>219</u>	<u>445</u>							
527.cam4_r	64	221	506	211	530	<u>214</u>	<u>523</u>							
538.imagick_r	64	123	1290	123	1290	<u>123</u>	<u>1290</u>							
544.nab_r	64	<u>117</u>	<u>924</u>	117	923	116	925							
549.fotonik3d_r	64	<u>430</u>	<u>580</u>	431	579	430	580							
554.roms_r	64	356	286	359	284	<u>357</u>	<u>285</u>							

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Package C State limit = C0

CPU Performance Boost = Aggressive

SNC (Sub NUMA) = Enable SNC2

FAN Control = Full

System date was wrongly set. The actual date is Jun-2023

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Apr 29 21:00:48 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
21:00:48 up 0 min, 1 user, load average: 5.28, 1.84, 0.65

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	21:00	8.00s	1.24s	0.09s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 8254137
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 8254137
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templots/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6434H
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps
cpu cores      : 8
siblings       : 16
4 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 2: core ids 0-7
physical id 3: core ids 0-7

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 0: apicids 0-15
physical id 1: apicids 128-143
physical id 2: apicids 256-271
physical id 3: apicids 384-399

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6434H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
Stepping:               8
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:              7400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              90 MiB (4 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-3,32-35
NUMA node1 CPU(s):    4-7,36-39
NUMA node2 CPU(s):    8-11,40-43
NUMA node3 CPU(s):    12-15,44-47
NUMA node4 CPU(s):    16-19,48-51
NUMA node5 CPU(s):    20-23,52-55
NUMA node6 CPU(s):    24-27,56-59
NUMA node7 CPU(s):    28-31,60-63

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 257626 MB
node 0 free: 256557 MB
node 1 cpus: 4-7,36-39
node 1 size: 258045 MB
node 1 free: 257638 MB
node 2 cpus: 8-11,40-43
node 2 size: 258045 MB
node 2 free: 257703 MB
node 3 cpus: 12-15,44-47
node 3 size: 258045 MB
node 3 free: 257736 MB
node 4 cpus: 16-19,48-51
node 4 size: 258045 MB
node 4 free: 257697 MB
node 5 cpus: 20-23,52-55
node 5 size: 258045 MB
node 5 free: 257568 MB
node 6 cpus: 24-27,56-59
node 6 size: 258045 MB
node 6 free: 257689 MB
node 7 cpus: 28-31,60-63
node 7 size: 257658 MB
node 7 free: 257299 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 21 21 21 21 31 31
1:  12 10 21 21 21 21 31 31
2:  21 21 10 12 31 31 21 21
3:  21 21 12 10 31 31 21 21
4:  21 21 31 31 10 12 21 21
5:  21 21 31 31 12 10 21 21
6:  31 31 21 21 21 21 10 12
7:  31 31 21 21 21 21 12 10

```

9. /proc/meminfo

MemTotal: 2113084132 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

10. who -r
run-level 3 Apr 29 21:00

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wickedd wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap nmb numad ostree-remount rdisc rpcbind
rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 upower
indirect wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=8b4cfla0-f943-46c1-a409-c2bca0c1173e
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=324M,high
crashkernel=72M,low

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 4.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   1.8T   54G  1.7T   4% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

```

9x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
4x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
1x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
18x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H, 3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.21.0 for D3986-A1
BIOS Date: 05/16/2023
BIOS Revision: 0.21
Firmware Revision: 1.0

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6434H,
3.70GHz

SPECrate®2017_fp_base = 567

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-29 08:00:47-0400.

Report generated on 2023-08-02 16:33:08 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.