



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

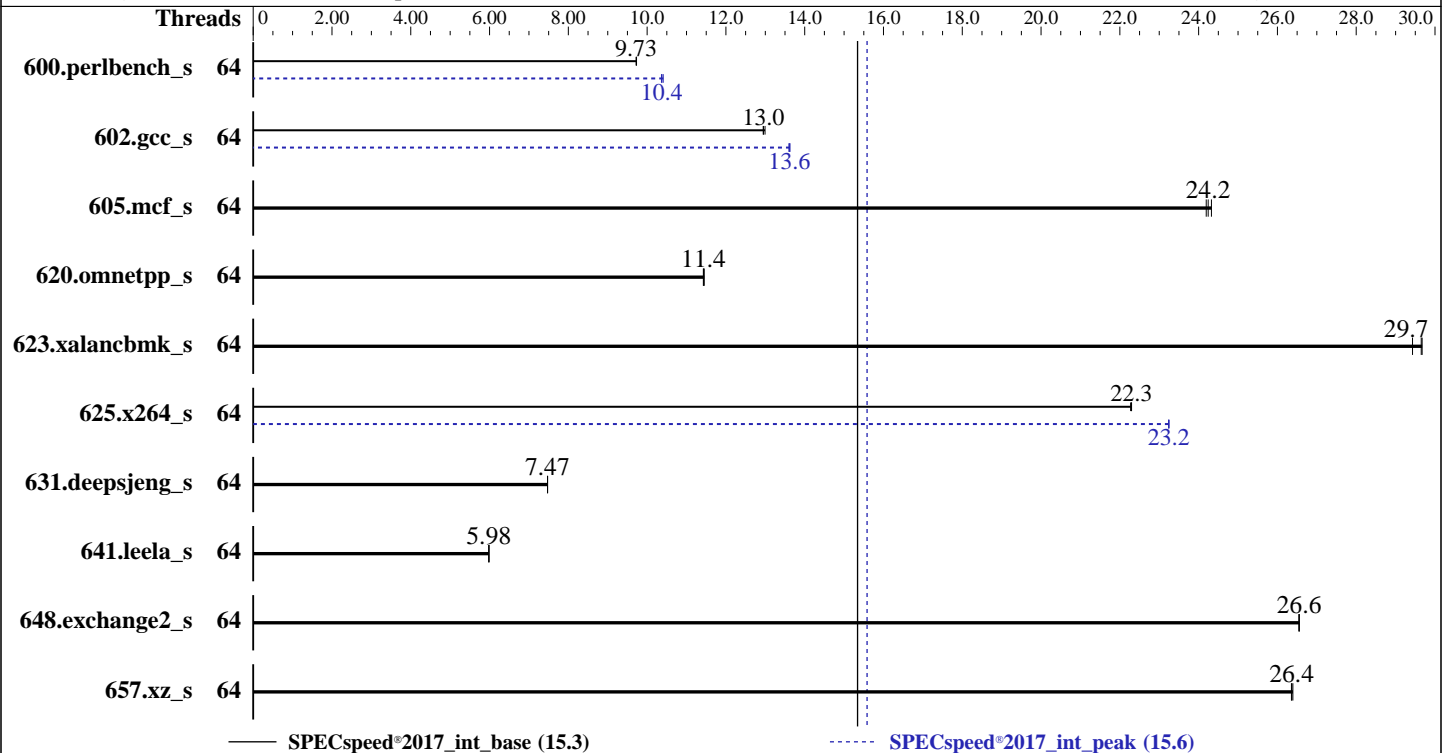

### Hardware

CPU Name: Intel Xeon Gold 5416S  
 Max MHz: 4000  
 Nominal: 2000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)  
 Storage: 1 x 1.6 TB PCIe NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 0701 released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	182	9.73	183	9.72	<b>182</b>	<b>9.73</b>	64	171	10.4	<b>171</b>	<b>10.4</b>	171	10.4
602.gcc_s	64	306	13.0	<b>307</b>	<b>13.0</b>	308	12.9	64	<b>292</b>	<b>13.6</b>	293	13.6	292	13.6
605.mcf_s	64	194	24.3	<b>195</b>	<b>24.2</b>	195	24.2	64	194	24.3	<b>195</b>	<b>24.2</b>	195	24.2
620.omnetpp_s	64	142	11.4	143	11.4	<b>143</b>	<b>11.4</b>	64	142	11.4	143	11.4	<b>143</b>	<b>11.4</b>
623.xalanbmk_s	64	48.1	29.4	47.8	29.7	<b>47.8</b>	<b>29.7</b>	64	48.1	29.4	47.8	29.7	<b>47.8</b>	<b>29.7</b>
625.x264_s	64	79.1	22.3	<b>79.1</b>	<b>22.3</b>	79.2	22.3	64	75.9	23.2	<b>75.9</b>	<b>23.2</b>	75.9	23.2
631.deepsjeng_s	64	192	7.47	<b>192</b>	<b>7.47</b>	192	7.47	64	192	7.47	<b>192</b>	<b>7.47</b>	192	7.47
641.leela_s	64	285	5.98	285	5.98	<b>285</b>	<b>5.98</b>	64	285	5.98	285	5.98	<b>285</b>	<b>5.98</b>
648.exchange2_s	64	111	26.6	111	26.5	<b>111</b>	<b>26.6</b>	64	111	26.6	111	26.5	<b>111</b>	<b>26.6</b>
657.xz_s	64	235	26.4	<b>234</b>	<b>26.4</b>	234	26.4	64	235	26.4	<b>234</b>	<b>26.4</b>	234	26.4

SPECspeed®2017\_int\_base = **15.3**

SPECspeed®2017\_int\_peak = **15.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalanbmk\_r / 623.xalanbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/cpull9/lib/intel64:/cpull9/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpu119/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Jul 26 13:53:40 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
13:53:40 up 4:22, 1 user, load average: 47.34, 56.89, 58.80  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:31 4:21m 0.83s 0.00s /bin/bash ./speed.sh

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4126920  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4126920  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./speed.sh  
/bin/bash ./speed.sh  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define  
intspeedaffinity --define drop\_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output\_format all  
--define intspeedaffinity --define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed  
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.694/templogs/preenv.intspeed.694.0.log  
--lognum 694.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /cpull9

-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5416S  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000461  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs  
cpu cores : 16  
siblings : 32

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-15  
physical id 1: core ids 0-15  
physical id 0: apicids 0-31  
physical id 1: apicids 128-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 5416S
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
Stepping:              8
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515695 MB
node 0 free: 512445 MB
node 1 cpus: 16-31,48-63
node 1 size: 516058 MB
node 1 free: 515245 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

9. /proc/meminfo

```
MemTotal: 1056516084 kB
```

10. who -r

```
run-level 3 Jul 26 09:31
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-f-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

-----  
18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 19. Disk information

SPEC is set to: /cpull9  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p8 xfs 1.3T 24G 1.2T 2% /

### 20. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
Product: RS720-E11-RS12U  
Product Family: Server  
Serial: R1S0MD000002

### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0701  
BIOS Date: 05/02/2023  
BIOS Revision: 7.1

## Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Gold 5416S)

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-26 01:53:39-0400.

Report generated on 2024-01-29 18:01:06 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.