



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Sep-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

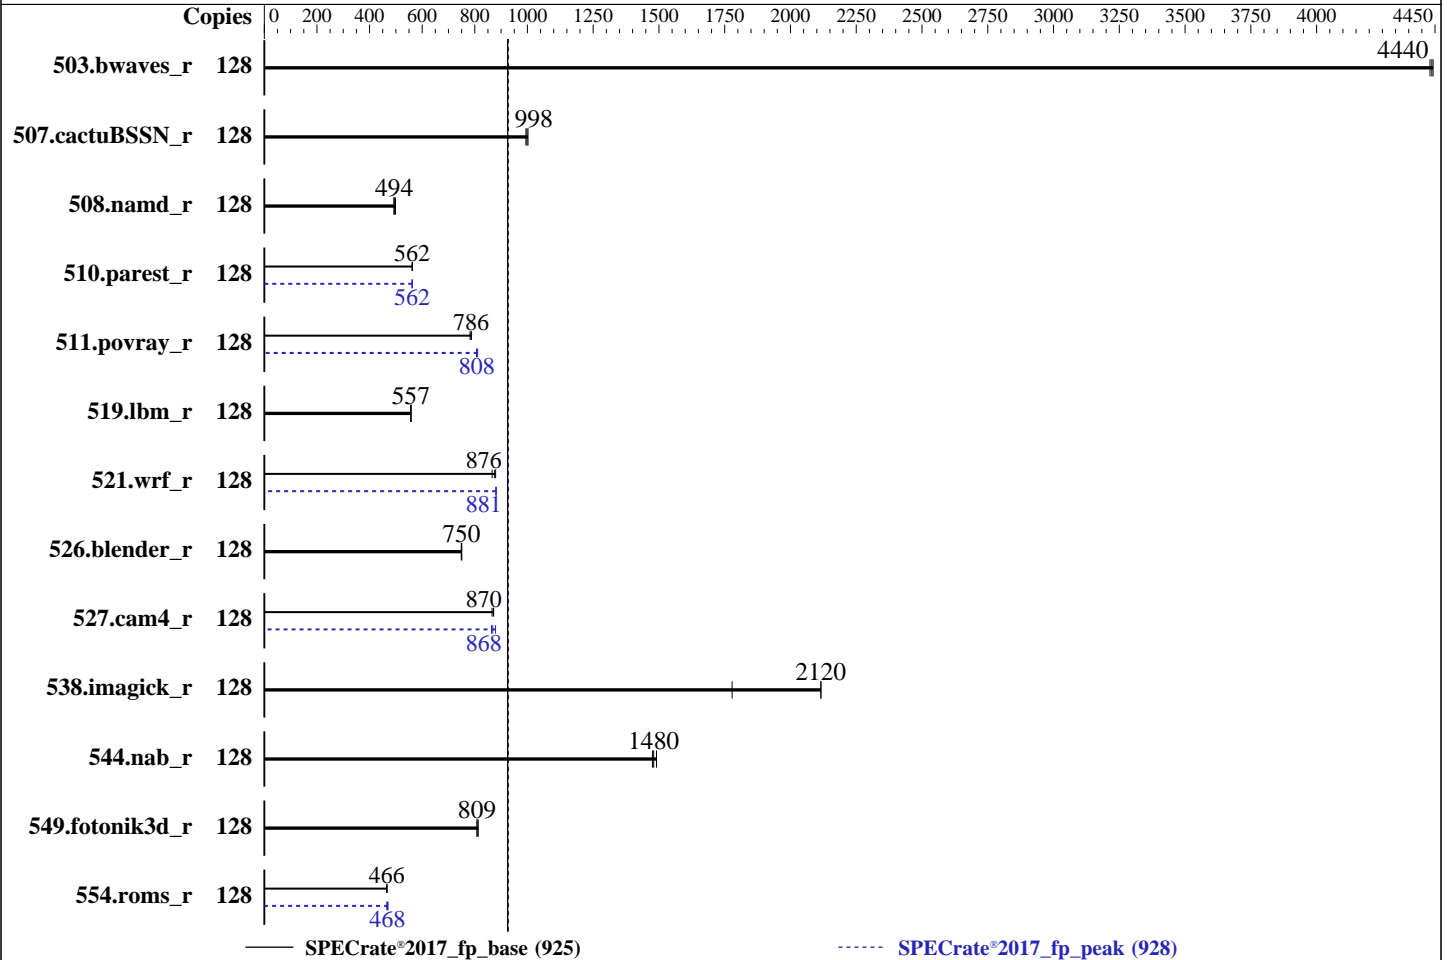

Hardware

CPU Name: Intel Xeon Platinum 8444H
 Max MHz: 4000
 Nominal: 2900
 Enabled: 64 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 01.02.00.05 Released Jul-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|------------|------------|-------------|------------|-------------|--------|------------|------------|------------|-------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 128 | 289 | 4440 | <u>289</u> | <u>4440</u> | 290 | 4430 | 128 | 289 | 4440 | <u>289</u> | <u>4440</u> | 290 | 4430 |
| 507.cactuBSSN_r | 128 | 162 | 1000 | <u>162</u> | <u>998</u> | 163 | 994 | 128 | 162 | 1000 | <u>162</u> | <u>998</u> | 163 | 994 |
| 508.namd_r | 128 | 244 | 499 | 247 | 493 | <u>246</u> | <u>494</u> | 128 | 244 | 499 | 247 | 493 | <u>246</u> | <u>494</u> |
| 510.parest_r | 128 | 596 | 562 | <u>595</u> | <u>562</u> | 595 | 563 | 128 | 595 | 562 | <u>596</u> | <u>562</u> | 596 | 562 |
| 511.povray_r | 128 | 382 | 782 | 380 | 787 | <u>380</u> | <u>786</u> | 128 | <u>370</u> | <u>808</u> | 369 | 811 | 370 | 807 |
| 519.lbm_r | 128 | 242 | 557 | 242 | 557 | <u>242</u> | <u>557</u> | 128 | 242 | 557 | 242 | 557 | <u>242</u> | <u>557</u> |
| 521.wrf_r | 128 | 326 | 879 | <u>327</u> | <u>876</u> | 331 | 866 | 128 | 326 | 880 | 325 | 881 | <u>325</u> | <u>881</u> |
| 526.blender_r | 128 | 260 | 749 | <u>260</u> | <u>750</u> | 260 | 750 | 128 | 260 | 749 | <u>260</u> | <u>750</u> | 260 | 750 |
| 527.cam4_r | 128 | 257 | 872 | <u>257</u> | <u>870</u> | 259 | 865 | 128 | 255 | 879 | 259 | 864 | <u>258</u> | <u>868</u> |
| 538.imagick_r | 128 | 179 | 1780 | 150 | 2120 | <u>150</u> | <u>2120</u> | 128 | 179 | 1780 | 150 | 2120 | <u>150</u> | <u>2120</u> |
| 544.nab_r | 128 | 145 | 1490 | 146 | 1480 | <u>146</u> | <u>1480</u> | 128 | 145 | 1490 | 146 | 1480 | <u>146</u> | <u>1480</u> |
| 549.fotonik3d_r | 128 | <u>617</u> | <u>809</u> | 617 | 809 | 613 | 813 | 128 | <u>617</u> | <u>809</u> | 617 | 809 | 613 | 813 |
| 554.roms_r | 128 | 437 | 466 | <u>437</u> | <u>466</u> | 436 | 466 | 128 | 437 | 465 | 432 | 470 | <u>435</u> | <u>468</u> |

SPECrate®2017_fp_base = 925

SPECrate®2017_fp_peak = 928

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Sep 21 15:05:23 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
15:05:23 up 5:27, 0 users, load average: 74.24, 114.55, 122.66
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125240
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4125240
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 128 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 128 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.011/templots/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8444H
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 16
siblings        : 32
4 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-15
physical id 1:  core ids 0-15
physical id 2:  core ids 0-15
physical id 3:  core ids 0-15
physical id 0:  apicids 0-31
physical id 1:  apicids 128-159
physical id 2:  apicids 256-287
physical id 3:  apicids 384-415
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8444H
BIOS Model name:      Intel(R) Xeon(R) Platinum 8444H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              4
Stepping:              8
BogoMIPS:              5800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              180 MiB (4 instances)
NUMA node(s):         16
NUMA node0 CPU(s):    0-3,64-67
NUMA node1 CPU(s):    4-7,68-71
NUMA node2 CPU(s):    8-11,72-75
NUMA node3 CPU(s):    12-15,76-79
NUMA node4 CPU(s):    16-19,80-83
NUMA node5 CPU(s):    20-23,84-87
NUMA node6 CPU(s):    24-27,88-91
NUMA node7 CPU(s):    28-31,92-95
NUMA node8 CPU(s):    32-35,96-99
NUMA node9 CPU(s):    36-39,100-103
NUMA node10 CPU(s):   40-43,104-107
NUMA node11 CPU(s):   44-47,108-111
NUMA node12 CPU(s):   48-51,112-115

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node13 CPU(s):          52-55,116-119
NUMA node14 CPU(s):          56-59,120-123
NUMA node15 CPU(s):          60-63,124-127
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 3M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 2M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 128M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 45M | 180M | 15 | Unified | 3 | 49152 | 1 | 64 |

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-3,64-67
node 0 size: 63742 MB
node 0 free: 63076 MB
node 1 cpus: 4-7,68-71
node 1 size: 64510 MB
node 1 free: 63959 MB
node 2 cpus: 8-11,72-75
node 2 size: 64510 MB
node 2 free: 63625 MB
node 3 cpus: 12-15,76-79
node 3 size: 64510 MB
node 3 free: 63950 MB
node 4 cpus: 16-19,80-83
node 4 size: 64510 MB
node 4 free: 63945 MB
node 5 cpus: 20-23,84-87
node 5 size: 64510 MB
node 5 free: 63904 MB
node 6 cpus: 24-27,88-91
node 6 size: 64510 MB
node 6 free: 63960 MB
node 7 cpus: 28-31,92-95
node 7 size: 64510 MB
node 7 free: 63990 MB
node 8 cpus: 32-35,96-99
node 8 size: 64510 MB
node 8 free: 63935 MB
node 9 cpus: 36-39,100-103
node 9 size: 64510 MB
node 9 free: 63941 MB
node 10 cpus: 40-43,104-107
node 10 size: 64510 MB
node 10 free: 63966 MB
node 11 cpus: 44-47,108-111
node 11 size: 64510 MB
node 11 free: 63960 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 12 cpus: 48-51,112-115
node 12 size: 64473 MB
node 12 free: 63926 MB
node 13 cpus: 52-55,116-119
node 13 size: 64510 MB
node 13 free: 63954 MB
node 14 cpus: 56-59,120-123
node 14 size: 64510 MB
node 14 free: 63966 MB
node 15 cpus: 60-63,124-127
node 15 size: 64499 MB
node 15 free: 63960 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0: 10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1: 12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2: 12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3: 12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4: 21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5: 21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
6: 21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
7: 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8: 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21 21
9: 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21 21
10: 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21 21
11: 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10 12
15: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10 12

```

```

-----
9. /proc/meminfo
MemTotal:      1056099664 kB

```

```

-----
10. who -r
run-level 3 Sep 21 09:38

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target Status
multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

```

-----
13. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
               dbus-broker firewalld getty@ irgbalance kdump mdmonitor microcode nis-domainname rhsmcertd
               rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled       chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
               nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@
               systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=058bfd1-c62b-4fad-8d41-5c40aa179007
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499
nohz_full=1-72
-----
```

```
-----
15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

```
-----
16. tuned-adm active
Current active profile: throughput-performance
-----
```

```
-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

21. Disk information
SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb5 xfs 820G 49G 772G 6% /home

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2488H V7
Product Family: EagleStream

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.00.05
BIOS Date: 07/13/2023

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 925

FusionServer 2488H V7 (Intel Xeon Platinum 8444H)

SPECrate®2017_fp_peak = 928

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-21 03:05:23-0400.
Report generated on 2023-10-11 12:29:41 by CPU2017 PDF formatter v6716.
Originally published on 2023-10-10.