



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

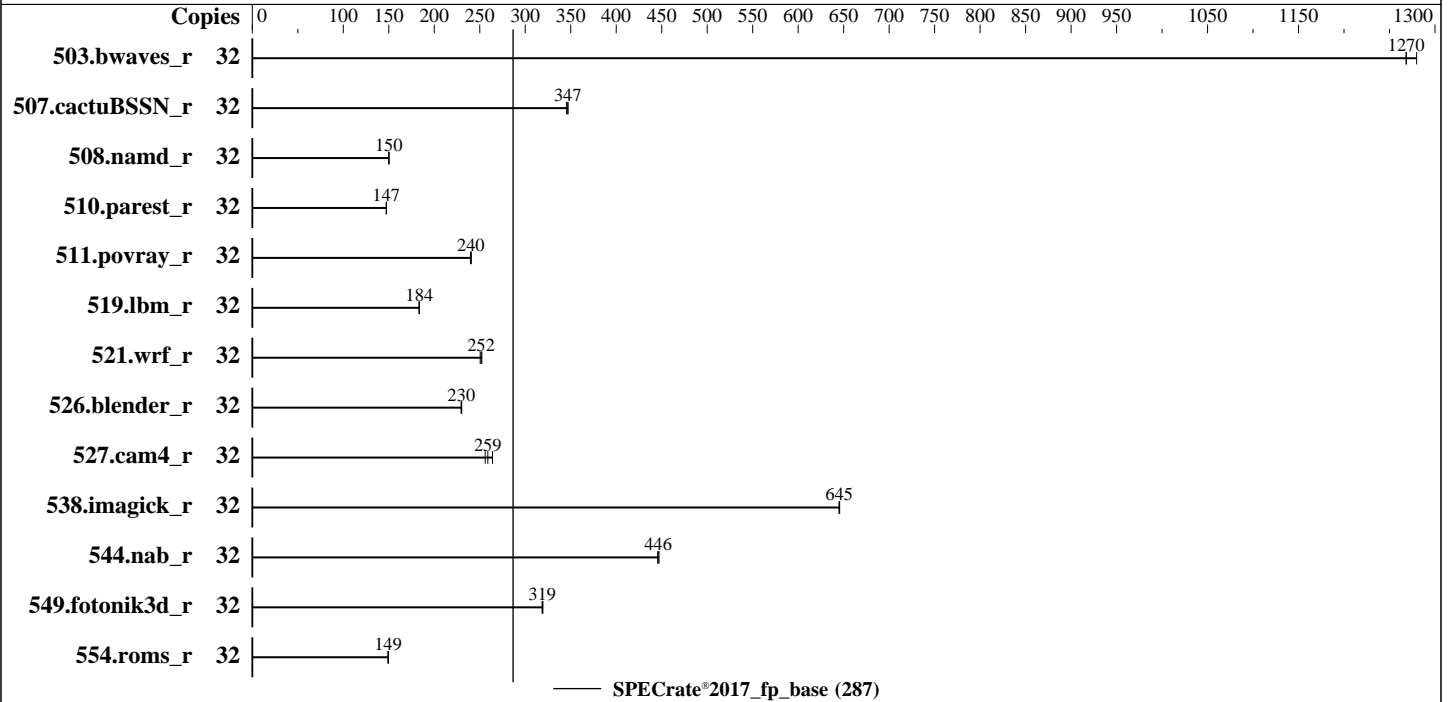

### Hardware

CPU Name: Intel Xeon Gold 6434  
 Max MHz: 4100  
 Nominal: 3700  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 4.3.1b released Mar-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Sep-2023  
Hardware Availability: Feb-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<u>253</u>	<u>1270</u>	253	1270	251	1280							
507.cactuBSSN_r	32	117	345	117	347	<u>117</u>	<u>347</u>							
508.namd_r	32	<u>202</u>	<u>150</u>	203	150	202	150							
510.parest_r	32	<u>568</u>	<u>147</u>	568	147	569	147							
511.povray_r	32	<u>311</u>	<u>240</u>	312	240	311	241							
519.lbm_r	32	184	183	184	184	<u>184</u>	<u>184</u>							
521.wrf_r	32	284	252	286	250	<u>285</u>	<u>252</u>							
526.blender_r	32	212	229	212	230	<u>212</u>	<u>230</u>							
527.cam4_r	32	212	264	<u>216</u>	<u>259</u>	219	256							
538.imagick_r	32	123	645	123	646	<u>123</u>	<u>645</u>							
544.nab_r	32	121	446	<u>121</u>	<u>446</u>	120	447							
549.fotonik3d_r	32	<u>391</u>	<u>319</u>	390	319	391	319							
554.roms_r	32	340	150	<u>341</u>	<u>149</u>	341	149							

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled  
DCU streamer Prefetch set to Enabled  
Enhanced CPU Performance set to Auto  
LLC Dead Line set to Disabled  
ADDDC Sparing set to Disabled  
Processor C6 Report set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri Sep 29 05:38:21 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
05:38:21 up 1 day, 1:10, 1 user, load average: 0.07, 0.02, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1     -             Thu04      12.00s     0.98s     0.14s     -bash
```

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4127011  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4127011  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --action=build --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define  
cores=16 --define physicalfirst --define invoke\_with\_interleave --define drop\_caches --tune base -o all  
fprate  
runcpu --action build --action validate --define default-platform-flags --define numcopies=32 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define  
cores=16 --define physicalfirst --define invoke\_with\_interleave --define drop\_caches --tune base  
--output\_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv  
--logfile \$SPEC/tmp/CPU2017.027/temlogs/preenv.fprate.027.0.log --lognum 027.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6434  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000190  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs  
cpu cores : 8  
siblings : 16  
2 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 1: core ids 0-7

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

physical id 0: apicids 0-15  
physical id 1: apicids 128-143  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      32
On-line CPU(s) list:        0-31
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Gold 6434
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         8
Socket(s):                   2
Stepping:                   8
CPU max MHz:                 4100.0000
CPU min MHz:                 800.0000
BogoMIPS:                    7400.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                             lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                             tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                             avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                             ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   768 KiB (16 instances)
L1i cache:                   512 KiB (16 instances)
L2 cache:                    32 MiB (16 instances)
L3 cache:                    45 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-3,16-19
NUMA node1 CPU(s):          4-7,20-23
NUMA node2 CPU(s):          8-11,24-27
NUMA node3 CPU(s):          12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 257693 MB
node 0 free: 253789 MB
node 1 cpus: 4-7,20-23
node 1 size: 258045 MB
node 1 free: 254661 MB
node 2 cpus: 8-11,24-27
node 2 size: 258011 MB
node 2 free: 257590 MB
node 3 cpus: 12-15,28-31
node 3 size: 258025 MB
node 3 free: 257610 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056539300 kB

10. who -r

run-level 3 Sep 28 04:28

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck
rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice
systemd-boot-check-no-failures systemd-network-generator systemd-sysext

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

indirect            systemd-time-wait-sync    systemd-timesyncd    udisks2  
                      wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=8f9e43e2-fda4-40e4-86e9-bcd4f62756aa  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
  current policy: frequency should be within 800 MHz and 4.10 GHz.  
                  The governor "performance" may decide which speed to use  
                  within this range.  
  
  boost state support:  
    Supported: yes  
    Active: yes

-----  
15. sysctl  
kernel.numa\_balancing            1  
kernel.randomize\_va\_space       2  
vm.compaction\_proactiveness     20  
vm.dirty\_background\_bytes       0  
vm.dirty\_background\_ratio       10  
vm.dirty\_bytes                   0  
vm.dirty\_expire\_centisecs       3000  
vm.dirty\_ratio                   20  
vm.dirty\_writeback\_centisecs    500  
vm.dirtytime\_expire\_seconds     43200  
vm.extfrag\_threshold            500  
vm.min\_unmapped\_ratio           1  
vm.nr\_hugepages                  0  
vm.nr\_hugepages\_mempolicy       0  
vm.nr\_overcommit\_hugepages      0  
vm.swappiness                    1  
vm.watermark\_boost\_factor       15000  
vm.watermark\_scale\_factor       10  
vm.zone\_reclaim\_mode            0

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag            [always] defer defer+madvise madvise never  
enabled           [always] madvise never  
hpage\_pmd\_size   2097152  
shmem\_enabled    always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs    60000  
defrag                   1  
max\_ptes\_none            511  
max\_ptes\_shared          256  
max\_ptes\_swap            64  
pages\_to\_scan            4096  
scan\_sleep\_millisecs    10000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

### 19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdb2        btrfs    892G      13G  879G   2% /home
```

### 20. /sys/devices/virtual/dmi/id

```
Vendor:          Cisco Systems Inc
Product:         UCSC-C220-M7S
Serial:          WZP2702091L
```

### 21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     C220M7.4.3.1b.0.0308232129
BIOS Date:        03/08/2023
BIOS Revision:    5.29
```

## Compiler Version Notes

```
=====  
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++ | 508.namd_r(base) 510.parest_r(base)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++, C | 511.povray_r(base) 526.blender_r(base)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M7 (Intel Xeon Gold 6434, 3.70GHz)

SPECrate®2017\_fp\_base = 287

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-29 05:38:21-0400.

Report generated on 2023-10-25 10:38:47 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.