



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

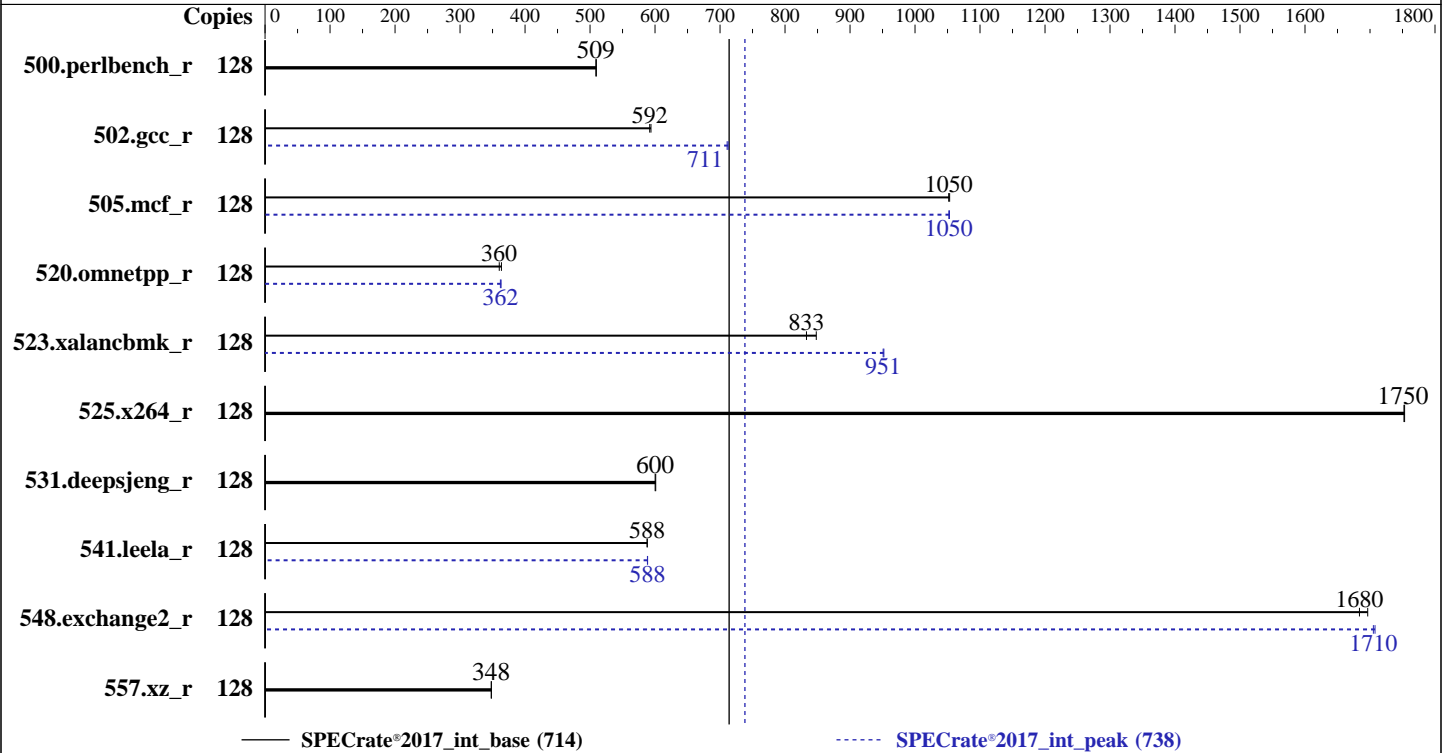

Hardware

CPU Name: AMD EPYC 9334
 Max MHz: 3900
 Nominal: 2700
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 80 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 5.15.0-86-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.4.6 released Jul-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	400	509	400	510			128	400	509	400	510		
502.gcc_r	128	305	594	306	592			128	254	712	255	711		
505.mcf_r	128	197	1050	196	1050			128	196	1050	197	1050		
520.omnetpp_r	128	466	360	462	364			128	464	362	462	363		
523.xalancbmk_r	128	159	848	162	833			128	142	952	142	951		
525.x264_r	128	128	1750	128	1750			128	128	1750	128	1750		
531.deepsjeng_r	128	244	601	244	600			128	244	601	244	600		
541.leela_r	128	361	588	360	588			128	360	588	360	589		
548.exchange2_r	128	198	1700	199	1680			128	196	1710	197	1710		
557.xz_r	128	397	348	397	348			128	397	348	397	348		

SPECrate®2017_int_base = 714

SPECrate®2017_int_peak = 738

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_rate_aocc400_znver4_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
```

```
Virtualization Technology : Disabled
NUMA Nodes per Socket : 4
L3 cache as NUMA Domain : Enabled
```

```
System Profile : Custom
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Wed Oct 11 15:40:04 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux amd-spa 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:40:04 up 2 min, 2 users, load average: 0.12, 0.10, 0.04
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1      -             25Nov61  55.00s  1.88s  0.36s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
root     pts/0    100.71.148.17 15:39   18.00s  0.00s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093804
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1
--define DL-VERS=v4.8 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-VERS=v4.8 --output_format html,pdf,txt intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-VERS=v4.8 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9334 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size      : 3584 4K pages
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9334 32-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           3910.2529
CPU min MHz:           1500.0000
BogoMIPS:               5401.37
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmlil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
```

Virtualization:

L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)

NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 96309 MB
node 0 free: 95782 MB
node 1 cpus: 8-15,72-79
node 1 size: 96763 MB
node 1 free: 96351 MB
node 2 cpus: 16-23,80-87
node 2 size: 96763 MB
node 2 free: 92840 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

```

node 3 cpus: 24-31,88-95
node 3 size: 96747 MB
node 3 free: 96310 MB
node 4 cpus: 32-39,96-103
node 4 size: 96763 MB
node 4 free: 96385 MB
node 5 cpus: 40-47,104-111
node 5 size: 96716 MB
node 5 free: 96394 MB
node 6 cpus: 48-55,112-119
node 6 size: 96763 MB
node 6 free: 96438 MB
node 7 cpus: 56-63,120-127
node 7 size: 96736 MB
node 7 free: 96401 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      792129576 kB

```

```

-----
10. who -r
    run-level 5 Nov 25 17:52

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
    Default Target  Status
    graphical      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
getty@ grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
lxd-agent multipathd pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd
systemd-pstore systemd-resolved systemd-timesyncd thermald tuned udisks2
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower

generated apport
indirect uidd
masked cryptdisks cryptdisks-early gpu-manager hwclock lvm2 multipath-tools-boot
networkd-dispatcher open-vm-tools rc rcS screen-cleanup sudo systemd-networkd-wait-online
ua-reboot-cmds ubuntu-advantage ufw vgauth vmttoolsd x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-5.15.0-86-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

ro

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.70 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2700MHz

15. tuned-adm active

Current active profile: latency-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	3
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer+madvise	madvise never
enabled	[always] madvise	never
hpage_pmd_size	2097152	
shmem_enabled	always	within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 3.4G 77G 5% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R7625
Product Family: PowerEdge
Serial: 1234567

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
24x 802C0000802C MTC20F2085S1RC48BA1 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.4.6
BIOS Date: 07/06/2023
BIOS Revision: 1.4

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
| peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
| peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

```

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

```

```

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

```

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 714

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017_int_peak = 738

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-11 11:40:04-0400.

Report generated on 2024-01-03 17:37:55 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.