



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

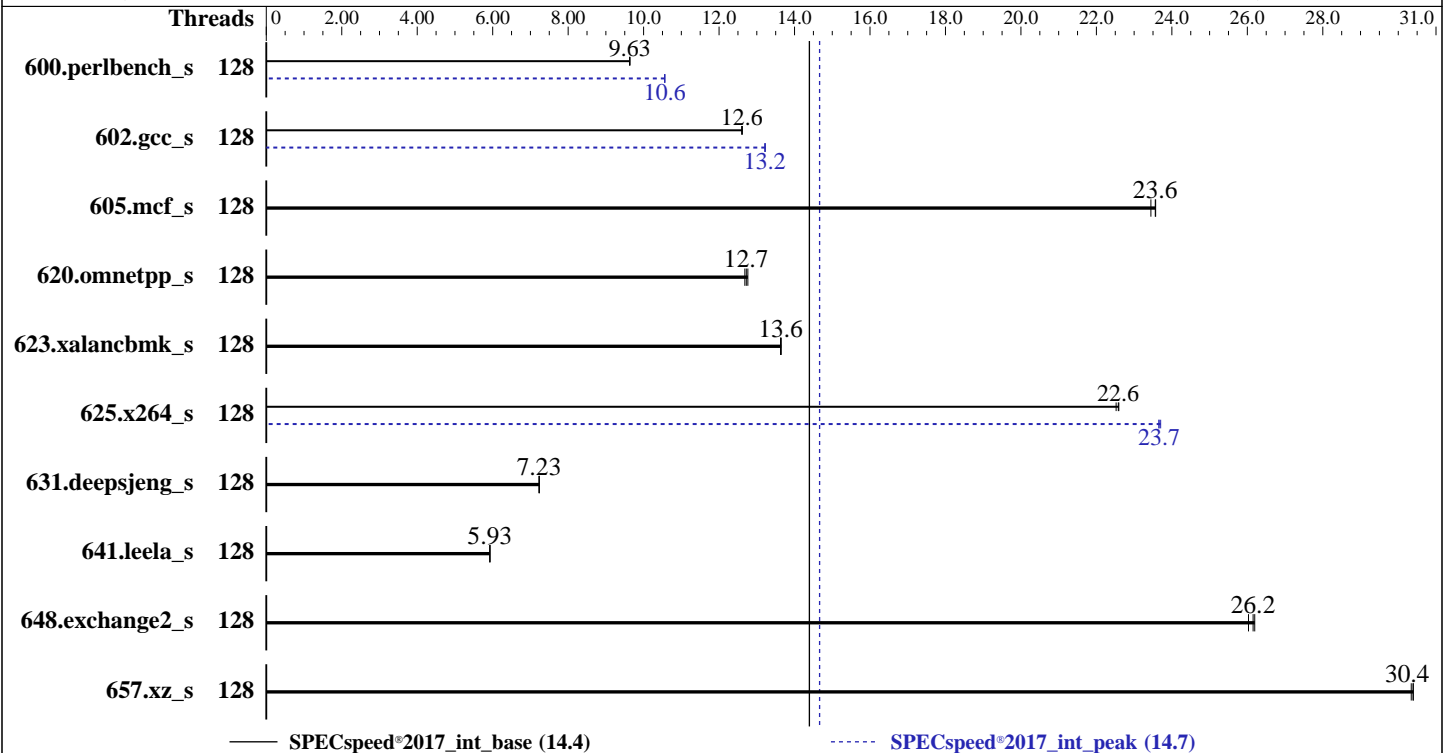

Hardware

CPU Name: Intel Xeon Platinum 8592+
 Max MHz: 3900
 Nominal: 1900
 Enabled: 128 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	184	9.63	184	9.63	184	9.64	128	168	10.6	168	10.6	168	10.6
602.gcc_s	128	316	12.6	316	12.6	316	12.6	128	301	13.2	301	13.2	301	13.2
605.mcf_s	128	201	23.4	200	23.6	200	23.6	128	201	23.4	200	23.6	200	23.6
620.omnetpp_s	128	128	12.7	128	12.8	129	12.7	128	128	12.7	128	12.8	129	12.7
623.xalancbmk_s	128	104	13.6	104	13.6	104	13.6	128	104	13.6	104	13.6	104	13.6
625.x264_s	128	78.3	22.5	78.1	22.6	78.1	22.6	128	74.5	23.7	74.6	23.7	74.4	23.7
631.deepsjeng_s	128	198	7.23	198	7.23	198	7.23	128	198	7.23	198	7.23	198	7.23
641.leela_s	128	288	5.92	288	5.93	288	5.93	128	288	5.92	288	5.93	288	5.93
648.exchange2_s	128	112	26.2	113	26.0	112	26.2	128	112	26.2	113	26.0	112	26.2
657.xz_s	128	203	30.4	203	30.4	204	30.3	128	203	30.4	203	30.4	204	30.3

SPECspeed®2017_int_base = **14.4**

SPECspeed®2017_int_peak = **14.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Platinum 8592+ processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Thermal Configuration set to Maximum Cooling
Intel Hyper-Threading set to Disabled
Memory Patrol Scrubbing set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Dead Block Predictor set to Enabled
Sub-NUMA Clustering (SNC) set to Enable SNC2(2-clusters)
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jan 30 02:46:18 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

2. w
02:46:18 up 1 min, 0 users, load average: 1.59, 0.64, 0.23
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062612
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062612
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/intspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 64
siblings : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126

physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252,254

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8592+
CPU family:             6
Model:                  207
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              2
Stepping:               2
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              6 MiB (128 instances)
L1i cache:              4 MiB (128 instances)
L2 cache:               256 MiB (128 instances)
L3 cache:               640 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128709 MB
node 0 free: 128126 MB
node 1 cpus: 16-31,80-95
node 1 size: 129015 MB
node 1 free: 128462 MB
node 2 cpus: 32-47,96-111
node 2 size: 129015 MB
node 2 free: 128101 MB
node 3 cpus: 48-63,112-127
node 3 size: 128942 MB
node 3 free: 128397 MB
node distances:
node  0  1  2  3
 0:  10  20  30  30
 1:  20  10  30  30
 2:  30  30  10  20
 3:  30  30  20  10
```

9. /proc/meminfo

MemTotal: 528060452 kB

10. who -r

run-level 3 Jan 30 02:45

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

disabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
              autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
              chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
              exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root
              hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create
              multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd
              rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
              systemd-boot-check-no-failures systemd-network-generator systemd-sysext
              systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
              wpa_supplicant@
indirect      pcsd saned@ wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=da74e710-a3db-4f33-9e12-6a2e672dd5ee
splash=silent
resume=/dev/disk/by-uuid/ef943a7c-3213-42e5-81d6-d2759bb8ad29
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

19. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 350G 322G 29G 92% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: ProLiant DL380 Gen11
Product Family: ProLiant
Serial: CNX21000G7
```

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Hynix HMCG88AGBRA193N 32 GB 2 rank 5600

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 2.12
BIOS Date: 12/13/2023
BIOS Revision: 2.12
Firmware Revision: 1.54
```

Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
| 657.xz_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
| 641.leela_s(base, peak)  
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

602.gcc_s (continued):

```
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-29 16:16:18-0500.

Report generated on 2024-02-28 19:20:28 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.