



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

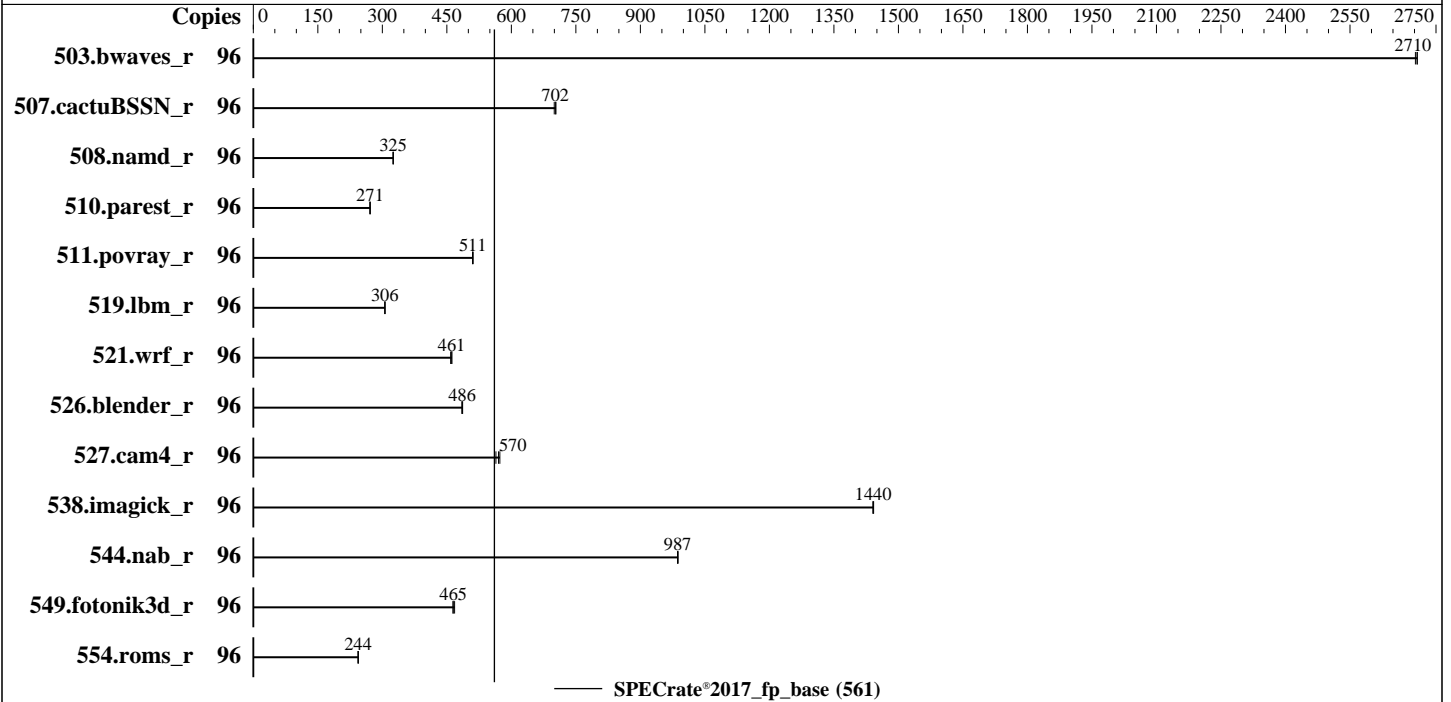

Hardware

CPU Name: Intel Xeon Silver 4516Y+
 Max MHz: 3700
 Nominal: 2200
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
 Storage: 1 x 480 GB M.2 SATA SSD
 Other: Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.3 (Plow)
 Kernel 5.14.0-362.8.1.el9_3.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2024
Hardware Availability: Mar-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<u>356</u>	<u>2710</u>	356	2710	356	2700							
507.cactuBSSN_r	96	173	704	<u>173</u>	<u>702</u>	174	700							
508.namd_r	96	280	325	<u>280</u>	<u>325</u>	280	325							
510.parest_r	96	923	272	927	271	<u>925</u>	<u>271</u>							
511.povray_r	96	<u>439</u>	<u>511</u>	439	511	440	510							
519.lbm_r	96	330	306	331	306	<u>331</u>	<u>306</u>							
521.wrf_r	96	<u>466</u>	<u>461</u>	469	459	466	462							
526.blender_r	96	<u>301</u>	<u>486</u>	302	485	300	487							
527.cam4_r	96	<u>295</u>	<u>570</u>	293	573	298	564							
538.imagick_r	96	166	1440	166	1440	<u>166</u>	<u>1440</u>							
544.nab_r	96	164	988	164	986	<u>164</u>	<u>987</u>							
549.fotonik3d_r	96	806	464	<u>805</u>	<u>465</u>	799	468							
554.roms_r	96	625	244	626	244	<u>626</u>	<u>244</u>							

SPECrate®2017_fp_base = 561

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Feb 22 15:33:45 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-362.8.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Oct 3 11:12:36 EDT 2023
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:33:45 up 5:54, 1 user, load average: 22.89, 71.45, 86.65
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 09:39 5:49m 1.14s 0.01s /bin/bash ./rate_int.sh

3. Username

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

From environment variable \$USER: root

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126939
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126939
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./rate_int.sh
/bin/bash ./rate_int.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size reflate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.376/templogs/preenv.fprate.376.0.log --lognum 376.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

-----
6. /proc/cpuinfo
model name : INTEL(R) XEON(R) SILVER 4516Y+
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 24
siblings : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2024
Hardware Availability: Mar-2024
Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) SILVER 4516Y+
BIOS Model name:       INTEL(R) XEON(R) SILVER 4516Y+
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               2
BogoMIPS:               4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq
                        dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                        sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                        rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm
                        ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              90 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-23,48-71
NUMA node1 CPU(s):    24-47,72-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                PBRSE-eIBRS SW sequence

Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 561

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2024
Hardware Availability: Mar-2024
Software Availability: Dec-2023

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 515695 MB
node 0 free: 513154 MB
node 1 cpus: 24-47,72-95
node 1 size: 516078 MB
node 1 free: 514074 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

9. /proc/meminfo

MemTotal: 1056536468 kB

10. who -r

run-level 3 Feb 22 09:39

11. Systemd service manager version: systemd 252 (252-18.el9)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime systemd-remount-fs
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update
nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-362.8.1.el9_3.x86_64
root=UUID=be3ee7bd-6dba-4efc-8d0a-4f4f123b4865
ro
resume=UUID=8de8c2d1-84ee-4c60-9038-a9e1ae2929c4

```

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

analyzing CPU 0:
  Unable to determine current policy
boost state support:
  Supported: yes
  Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release Red Hat Enterprise Linux release 9.3 (Plow)
system-release Red Hat Enterprise Linux release 9.3 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   372G  25G  347G   7% /home

```

```

-----
20. /sys/devices/virtual/dmi/id

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 561

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2024
Hardware Availability: Mar-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vendor: Lenovo
Product: ThinkSystem SD530 V3
Product Family: ThinkSystem
Serial: PASDVMK006

21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4400
1x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: FNE113F-2.20
BIOS Date: 01/02/2024
BIOS Revision: 2.20
Firmware Revision: 1.10

Compiler Version Notes

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 561

ThinkSystem SD530 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-22 02:33:45-0500.

Report generated on 2024-03-27 20:24:09 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.