



SPEC CPU®2017 Floating Point Rate Result


Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

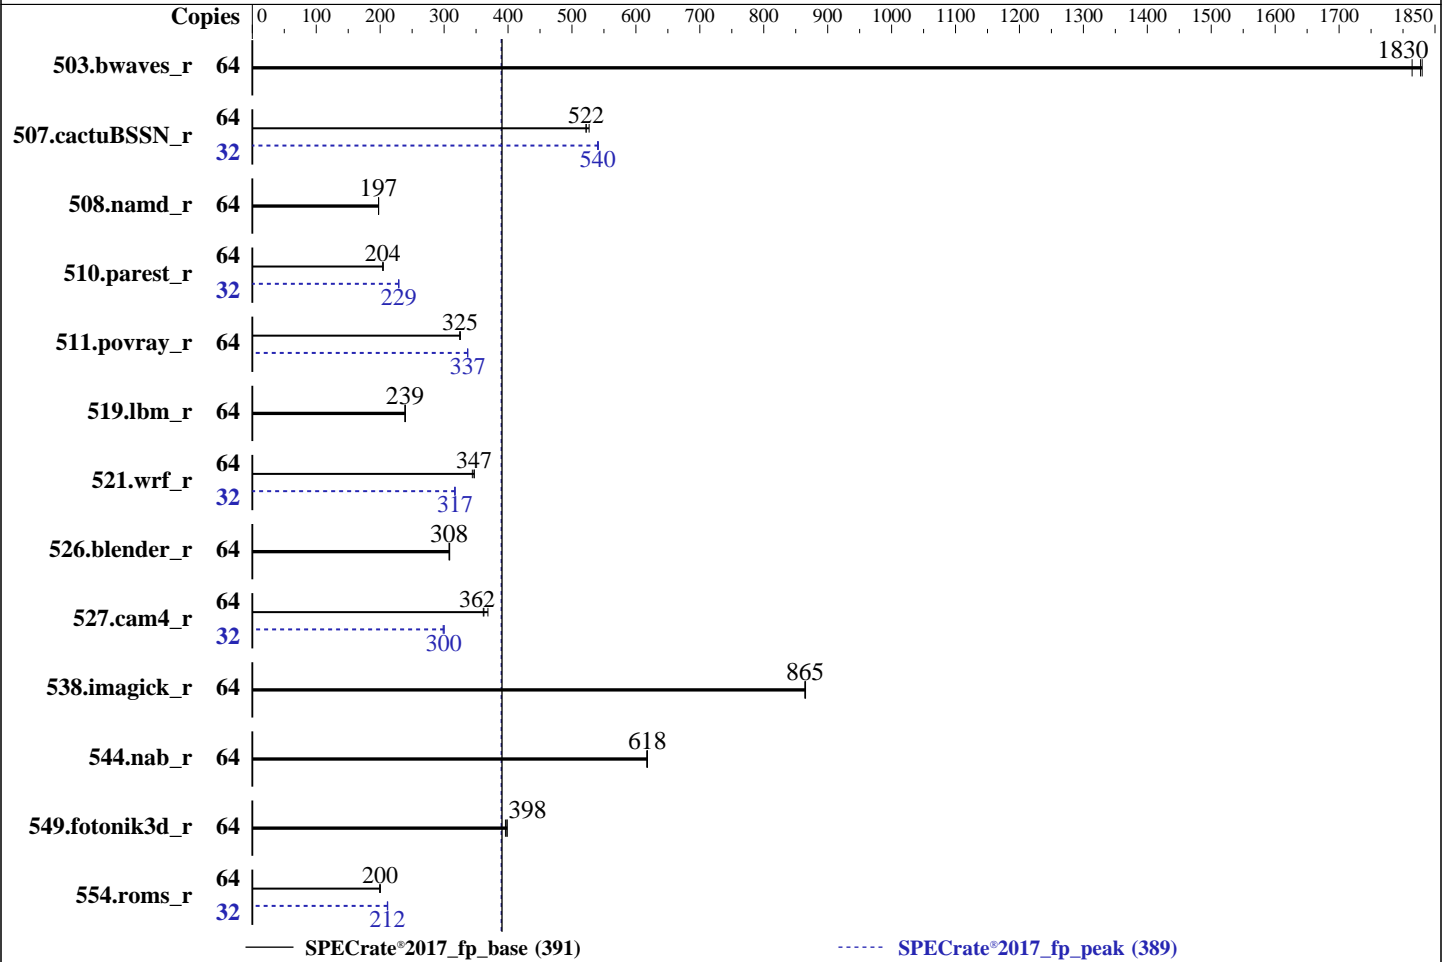

Hardware

CPU Name: Intel Xeon Silver 4514Y
Max MHz: 3400
Nominal: 2000
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 30 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
Storage: 1 x 960 GB NVMe
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.3 (Plow)
5.14.0-362.13.1.el9_3.x86_64
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 2.3 released May-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at cost of additional power.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	354	1810	<u>351</u>	<u>1830</u>	351	1830	64	354	1810	<u>351</u>	<u>1830</u>	351	1830
507.cactuBSSN_r	64	155	522	<u>155</u>	<u>522</u>	154	527	32	74.8	541	<u>75.0</u>	<u>540</u>	75.0	540
508.namd_r	64	308	198	<u>308</u>	<u>197</u>	308	197	64	308	198	<u>308</u>	<u>197</u>	308	197
510.parest_r	64	<u>819</u>	<u>204</u>	818	205	821	204	32	365	229	<u>366</u>	<u>229</u>	366	229
511.povray_r	64	459	325	<u>460</u>	<u>325</u>	461	324	64	443	337	<u>444</u>	<u>337</u>	444	337
519.lbm_r	64	<u>282</u>	<u>239</u>	282	239	282	239	64	<u>282</u>	<u>239</u>	282	239	282	239
521.wrf_r	64	<u>413</u>	<u>347</u>	417	344	413	347	32	226	317	226	316	<u>226</u>	<u>317</u>
526.blender_r	64	316	308	316	309	<u>316</u>	<u>308</u>	64	316	308	316	309	<u>316</u>	<u>308</u>
527.cam4_r	64	310	361	304	369	<u>309</u>	<u>362</u>	32	187	299	187	300	<u>187</u>	<u>300</u>
538.imagick_r	64	184	865	<u>184</u>	<u>865</u>	184	864	64	184	865	<u>184</u>	<u>865</u>	184	864
544.nab_r	64	175	617	174	618	<u>174</u>	<u>618</u>	64	175	617	174	618	<u>174</u>	<u>618</u>
549.fotonik3d_r	64	630	396	626	399	<u>626</u>	<u>398</u>	64	630	396	626	399	<u>626</u>	<u>398</u>
554.roms_r	64	508	200	510	199	<u>509</u>	<u>200</u>	32	240	212	241	211	<u>240</u>	<u>212</u>

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Power Technology = Custom
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Jul 6 00:59:25 2024

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-362.13.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Nov 24 01:57:57 EST
2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
00:59:25 up 6:48, 1 user, load average: 35.59, 56.51, 60.95
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
root      tty1      18:11      6:35m  1.27s  0.02s  -bash
```

3. Username

```
From environment variable $USER:  root
```

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4126750
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4126750
virtual memory                (kbytes, -v) unlimited
file locks                    (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4514Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000240
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 16
siblings        : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0:  core ids 0-15
physical id 1:  core ids 0-15
physical id 0:  apicids 0-31
physical id 1:  apicids 128-159
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) SILVER 4514Y
BIOS Model name:       INTEL(R) XEON(R) SILVER 4514Y
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
Stepping:               2
Frequency boost:       enabled
CPU max MHz:            2001.0000
CPU min MHz:            800.0000
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                        sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                        avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                        movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                        arch_capabilities
L1d cache:              1.5 MiB (32 instances)
L1i cache:              1 MiB (32 instances)
L2 cache:               64 MiB (32 instances)
L3 cache:               60 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-7,32-39
NUMA node1 CPU(s):     8-15,40-47
NUMA node2 CPU(s):     16-23,48-55
NUMA node3 CPU(s):     24-31,56-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 257680 MB
node 0 free: 246496 MB
node 1 cpus: 8-15,40-47
node 1 size: 257990 MB
node 1 free: 250383 MB
node 2 cpus: 16-23,48-55
node 2 size: 258043 MB
node 2 free: 250100 MB
node 3 cpus: 24-31,56-63
node 3 size: 258038 MB
node 3 free: 250406 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056515540 kB

10. who -r

run-level 3 Jul 5 18:10

11. Systemd service manager version: systemd 252 (252-18.e19)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewallld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvmeefc-boot-connections ostree-remount pmcd pmie pmlogger
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```

power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update
systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltyt canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server
gssproxy httpd httpd@ ibacm iprdump iprinit ipupdate ipsec iscsid iscsiuiio kpatch
kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named
named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvmmf-autoconnect
ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysextr target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecret d virtstoraged
vsftpd wpa_supplicant
indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 2.00 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)
system-release  Red Hat Enterprise Linux release 9.3 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   856G  497G  359G  59% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          Tyrone Systems
Product:         Tyrone Camarero SDI200A3N-212
Product Family: Family
Serial:          0123456789
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     2.3
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

Platform Notes (Continued)

BIOS Date: 05/14/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391
SPECrate®2017_fp_peak = 389

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jul-2024
Hardware Availability: Jan-2023
Software Availability: Dec-2023

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: basepeak = yes
```

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: basepeak = yes
```

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_fp_base = 391

SPECrate®2017_fp_peak = 389

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jul-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-05 15:29:24-0400.

Report generated on 2024-08-14 14:00:41 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-13.