



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10


(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

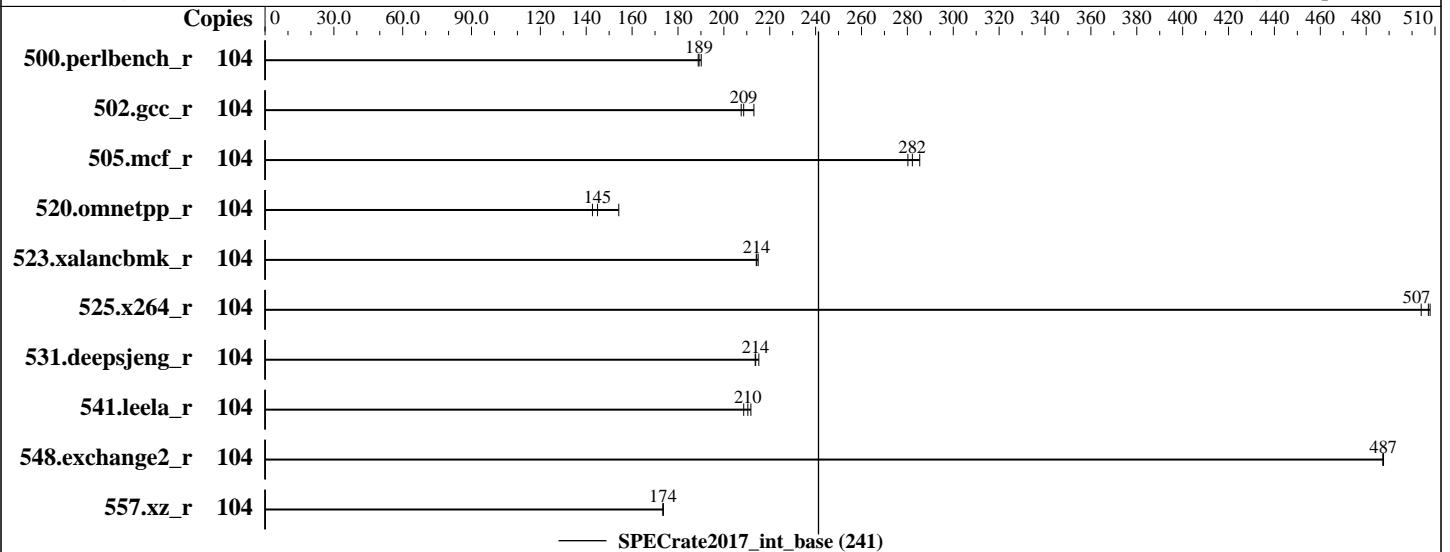

Hardware

CPU Name: Intel Xeon Platinum 8170
Max MHz.: 3700
Nominal: 2100
Enabled: 52 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 960 GB SATA SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
Kernel 4.4.21-69-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)
File System: xfs
System State: Run level 5 (multi-user, w/GUI)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc: jemalloc memory allocator library V5.0.1;
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or releases



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	871	190	<u>875</u>	<u>189</u>	877	189							
502.gcc_r	104	691	213	<u>706</u>	<u>209</u>	710	208							
505.mcf_r	104	589	285	<u>596</u>	<u>282</u>	600	280							
520.omnetpp_r	104	885	154	<u>941</u>	<u>145</u>	956	143							
523.xalancbmk_r	104	511	215	<u>512</u>	<u>214</u>	513	214							
525.x264_r	104	<u>359</u>	<u>507</u>	359	508	361	504							
531.deepsjeng_r	104	554	215	558	214	<u>557</u>	<u>214</u>							
541.leela_r	104	<u>818</u>	<u>210</u>	825	209	813	212							
548.exchange2_r	104	559	487	559	488	<u>559</u>	<u>487</u>							
557.xz_r	104	<u>647</u>	<u>174</u>	647	174	647	173							

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017/lib/ia32:/home/spec2017/lib/intel64:/home/spec2017/je5.0.1-32
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/spec2017/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled
LLC Dead Line Allocation set to Disabled
Workload Pofile set to Throughput Frequency Compute
Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /home/spec2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on dl380-sys2-sles Mon Oct 2 09:14:20 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
 2 "physical id"s (chips)
 104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 52
physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 104
On-line CPU(s) list: 0-103
Thread(s) per core: 2
Core(s) per socket: 26
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.082
BogoMIPS: 4190.16
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes (Continued)

L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-12,52-64
NUMA node1 CPU(s): 13-25,65-77
NUMA node2 CPU(s): 26-38,78-90
NUMA node3 CPU(s): 39-51,91-103

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 52 53 54 55 56 57 58 59 60 61 62 63 64
node 0 size: 47890 MB
node 0 free: 46289 MB
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 65 66 67 68 69 70 71 72 73 74 75 76 77
node 1 size: 48380 MB
node 1 free: 47481 MB
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 78 79 80 81 82 83 84 85 86 87 88 89 90
node 2 size: 48380 MB
node 2 free: 47850 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 91 92 93 94 95 96 97 98 99 100 101 102 103
node 3 size: 48262 MB
node 3 free: 47756 MB
node distances:
node 0 1 2 3
0: 10 21 31 31
1: 21 10 31 31
2: 31 31 10 21
3: 31 31 21 10

From /proc/meminfo
MemTotal: 197544148 kB
HugePages_Total: 0

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
```

```
SUSE Linux Enterprise Server 12 (x86_64)
```

```
VERSION = 12
```

```
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
```

```
# Please check /etc/os-release for details about this release.
```

```
os-release:
```

```
NAME="SLES"
```

```
VERSION="12-SP2"
```

```
VERSION_ID="12.2"
```

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

```
ID="sles"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

```
Linux dl380-sys2-sles 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Oct 1 17:26
```

```
SPEC is set to: /home/spec2017
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb4        xfs   400G  8.9G  391G   3% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U30 09/29/2017
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-gopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-gopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-gopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-02 10:14:19-0400.

Report generated on 2018-10-31 14:24:55 by CPU2017 PDF formatter v6067.

Originally published on 2017-10-18.