



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10


(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

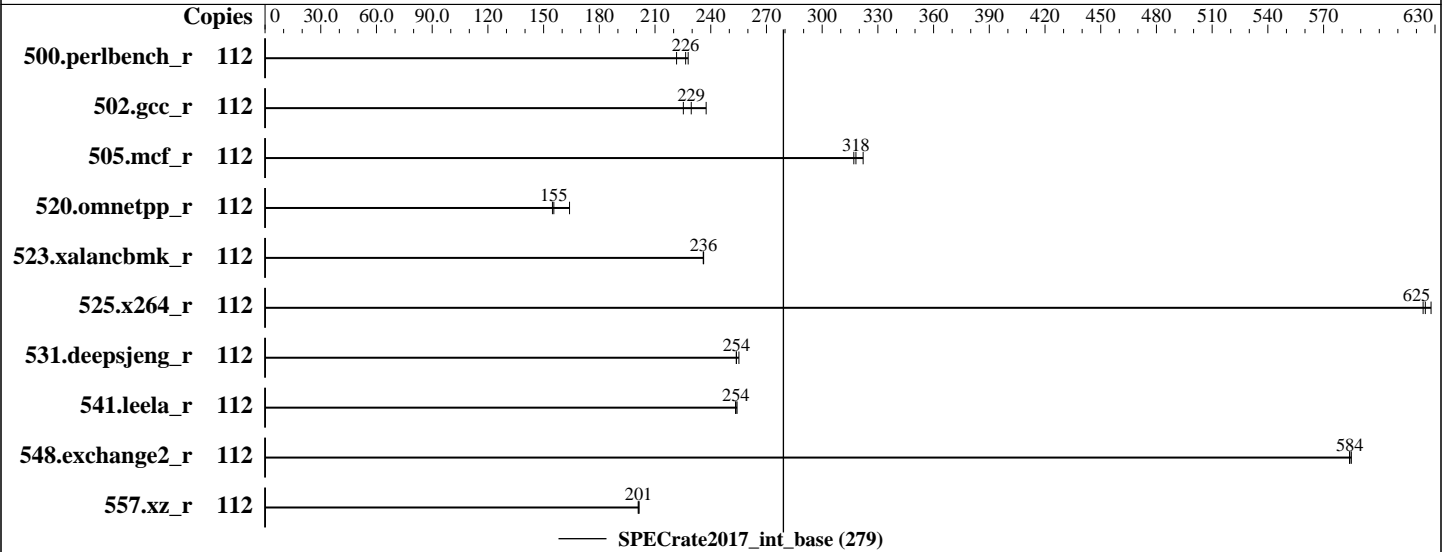

Hardware

CPU Name: Intel Xeon Platinum 8180
Max MHz.: 3800
Nominal: 2500
Enabled: 56 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 480 GB SATA SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
Kernel 4.4.21-68-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc: jemalloc memory allocator library V5.0.1;
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or releases



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	783	228	<u>787</u>	<u>226</u>	805	222							
502.gcc_r	112	668	238	<u>691</u>	<u>229</u>	704	225							
505.mcf_r	112	562	322	<u>569</u>	<u>318</u>	571	317							
520.omnetpp_r	112	896	164	<u>945</u>	<u>155</u>	949	155							
523.xalancbmk_r	112	<u>501</u>	<u>236</u>	501	236	501	236							
525.x264_r	112	312	628	314	624	<u>314</u>	<u>625</u>							
531.deepsjeng_r	112	503	255	<u>506</u>	<u>254</u>	506	254							
541.leela_r	112	732	253	<u>731</u>	<u>254</u>	730	254							
548.exchange2_r	112	<u>502</u>	<u>584</u>	502	584	502	585							
557.xz_r	112	601	201	<u>601</u>	<u>201</u>	602	201							

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec_cpu/cpu2017/lib/ia32:/spec_cpu/cpu2017/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/spec_cpu/cpu2017/je5.0.1-32:/spec_cpu/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled
LLC Dead Line Allocation set to Disabled
Workload Pofile set to Throughput Frequency Compute
Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /spec_cpu/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on local Sun Oct 15 20:00:49 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings     : 56
physical 0: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
30
physical 1: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
30
```

From lscpu:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s):         2
NUMA node(s):     4
Vendor ID:        GenuineIntel
CPU family:        6
Model:            85
Model name:        Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:         4
CPU MHz:          2494.126
BogoMIPS:         4988.25
Virtualization:    VT-x
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes (Continued)

L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-13,56-69
NUMA node1 CPU(s): 14-27,70-83
NUMA node2 CPU(s): 28-41,84-97
NUMA node3 CPU(s): 42-55,98-111

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 56 57 58 59 60 61 62 63 64 65 66 67 68 69
node 0 size: 47891 MB
node 0 free: 46917 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 1 size: 48380 MB
node 1 free: 46488 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 84 85 86 87 88 89 90 91 92 93 94
95 96 97
node 2 size: 48380 MB
node 2 free: 47864 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 48247 MB
node 3 free: 47780 MB
node distances:
node  0  1  2  3
 0:  10  21  31  31
 1:  21  10  31  31
 2:  31  31  10  21
 3:  31  31  21  10
```

From /proc/meminfo

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

MemTotal: 197528520 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
```

```
SUSE Linux Enterprise Server 12 (x86_64)
```

```
VERSION = 12
```

```
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
```

```
# Please check /etc/os-release for details about this release.
```

```
os-release:
```

```
NAME="SLES"
```

```
VERSION="12-SP2"
```

```
VERSION_ID="12.2"
```

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

```
ID="sles"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

```
Linux local 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016 (63cf368) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 11 21:37
```

```
SPEC is set to: /spec_cpu/cpu2017
```

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        btrfs    445G  248G  194G  57% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U30 09/29/2017
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_int_base = 279

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-15 21:00:48-0400.

Report generated on 2018-10-31 14:35:41 by CPU2017 PDF formatter v6067.

Originally published on 2017-10-31.