



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

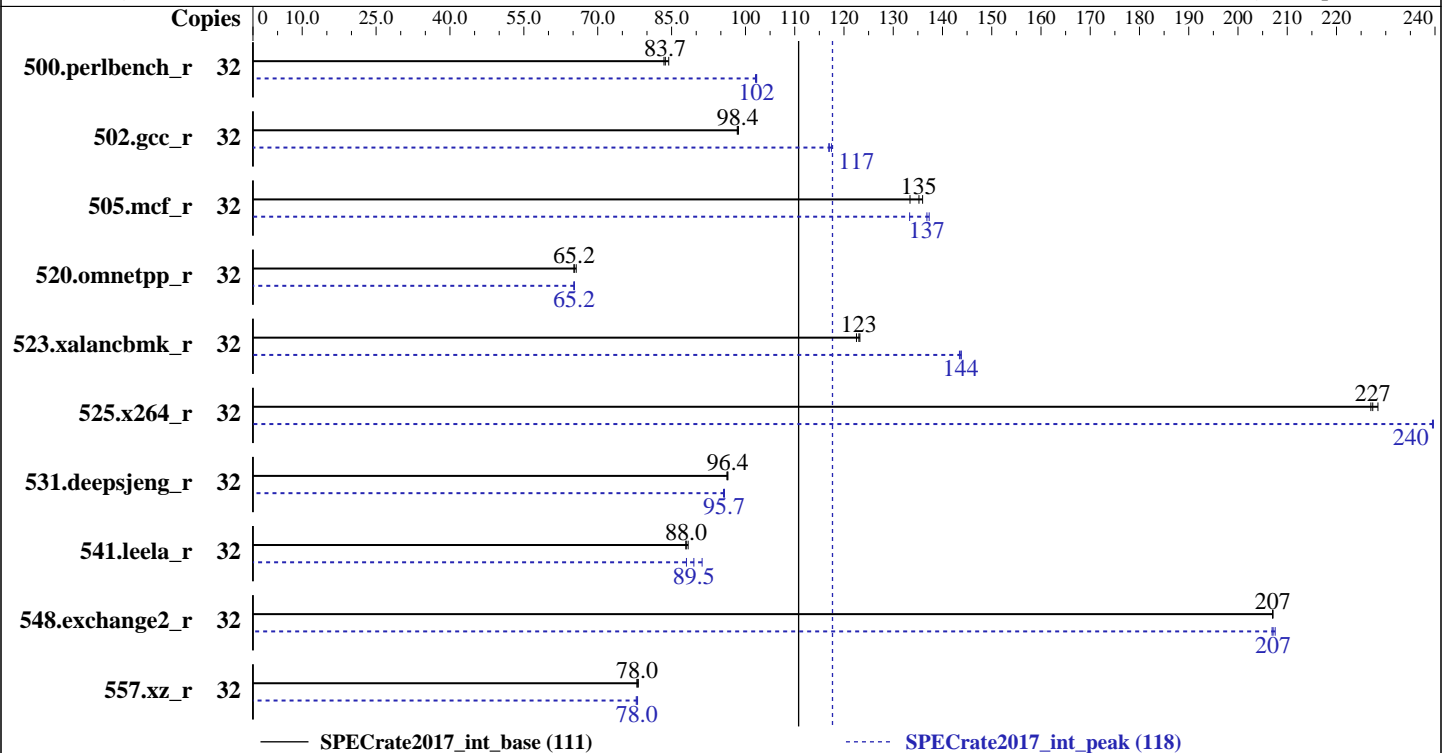

Hardware

CPU Name: Intel Xeon Gold 5122
 Max MHz.: 3700
 Nominal: 3600
 Enabled: 16 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 900 GB 15K RPM SAS12
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 1.1.7 released Sep-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library
 V5.0.1;
 jemalloc: configured and built at default for
 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4,
 and the system compiler gcc 4.8.5;
 jemalloc: sources available from jemalloc.net or
 releases



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	610	83.5	608	83.7	603	84.4	32	498	102	498	102	499	102
502.gcc_r	32	460	98.6	461	98.3	460	98.4	32	388	117	387	117	386	117
505.mcf_r	32	388	133	380	136	382	135	32	377	137	388	133	378	137
520.omnetpp_r	32	644	65.2	640	65.6	644	65.2	32	644	65.2	644	65.2	644	65.2
523.xalancbmk_r	32	274	123	275	123	276	123	32	236	143	235	144	235	144
525.x264_r	32	246	227	247	227	245	228	32	234	239	234	240	234	240
531.deepsjeng_r	32	381	96.2	380	96.4	380	96.4	32	383	95.7	383	95.7	384	95.5
541.leela_r	32	600	88.4	602	88.0	603	87.9	32	581	91.2	592	89.5	602	88.0
548.exchange2_r	32	405	207	405	207	405	207	32	404	208	405	207	405	207
557.xz_r	32	442	78.3	443	78.0	443	78.0	32	443	78.0	444	77.8	443	78.1

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

Logical Processor Enabled

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

Virtualization Technology Disabled
 Sub NUMA Cluster Enabled
 System Profile set to Custom
 CPU Performance set to Maximum Performance
 ClE Disabled
 C States set to Autonomous
 Uncore Frequency set to Dynamic
 Memory Patrol Scrub Disabled
 Energy Efficiency Policy set to Performance
 CPU Interconnect Bus Link Power Management Disabled
 PCI ASPM L1 Link Power Management Disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-92x1 Sat Oct 7 20:19:45 2017

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 2 3 4 10
  physical 1: cores 0 5 9 13
  physical 2: cores 1 10 11 12
  physical 3: cores 1 2 5 11

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    4
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
Stepping:               4

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

CPU MHz:          3591.564
BogoMIPS:         7183.12
Virtualization:   VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         1024K
L3 cache:         16896K
NUMA node0 CPU(s): 0,8,16,24
NUMA node1 CPU(s): 1,9,17,25
NUMA node2 CPU(s): 2,10,18,26
NUMA node3 CPU(s): 3,11,19,27
NUMA node4 CPU(s): 4,12,20,28
NUMA node5 CPU(s): 5,13,21,29
NUMA node6 CPU(s): 6,14,22,30
NUMA node7 CPU(s): 7,15,23,31

```

```

Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24
node 0 size: 95358 MB
node 0 free: 95044 MB
node 1 cpus: 1 9 17 25
node 1 size: 96760 MB
node 1 free: 96489 MB
node 2 cpus: 2 10 18 26
node 2 size: 96760 MB
node 2 free: 96487 MB
node 3 cpus: 3 11 19 27
node 3 size: 96760 MB
node 3 free: 96486 MB
node 4 cpus: 4 12 20 28
node 4 size: 96760 MB
node 4 free: 96476 MB
node 5 cpus: 5 13 21 29

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

node 5 size: 96760 MB
node 5 free: 96475 MB
node 6 cpus: 6 14 22 30
node 6 size: 96760 MB
node 6 free: 96487 MB
node 7 cpus: 7 15 23 31
node 7 size: 96757 MB
node 7 free: 96475 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  21  31  21  11  21  31  21
 1:  21  10  21  31  21  11  21  31
 2:  31  21  10  21  31  21  11  21
 3:  21  31  21  10  21  31  21  11
 4:  11  21  31  21  10  21  31  21
 5:  21  11  21  31  21  10  21  31
 6:  31  21  11  21  31  21  10  21
 7:  21  31  21  11  21  31  21  10

```

From /proc/meminfo

```

MemTotal:      791223344 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux linux-92x1 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Platform Notes (Continued)

run-level 3 Oct 7 20:19

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	796G	17G	780G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 118

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

```
502.gcc_r: -m32 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

```
523.xalancbmk_r: -m32
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-07 23:19:44-0400.

Report generated on 2018-10-31 15:50:04 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-21.