



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### Synergy 480 Gen10

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

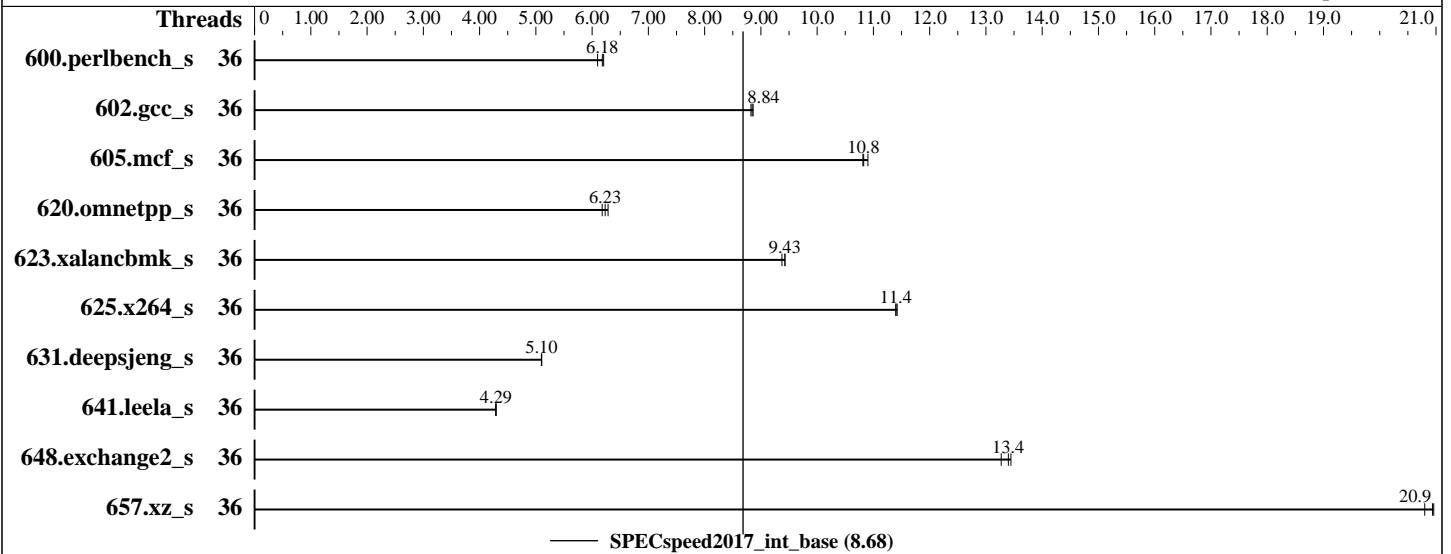

### Hardware

CPU Name: Intel Xeon Gold 6140  
 Max MHz.: 3700  
 Nominal: 2300  
 Enabled: 36 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SATA SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version I42 released Oct-2017 (tested with I42 9/27/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;  
 jemalloc: configured and built at default for  
 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4,  
 and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or  
 releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	36	291	6.10	286	6.20	<b>287</b>	<b>6.18</b>							
602.gcc_s	36	<b>450</b>	<b>8.84</b>	449	8.86	451	8.82							
605.mcf_s	36	<b>436</b>	<b>10.8</b>	437	10.8	433	10.9							
620.omnetpp_s	36	260	6.28	264	6.18	<b>262</b>	<b>6.23</b>							
623.xalancbmk_s	36	151	9.37	150	9.43	<b>150</b>	<b>9.43</b>							
625.x264_s	36	155	11.4	154	11.4	<b>155</b>	<b>11.4</b>							
631.deepsjeng_s	36	<b>281</b>	<b>5.10</b>	281	5.10	281	5.10							
641.leela_s	36	398	4.29	397	4.29	<b>398</b>	<b>4.29</b>							
648.exchange2_s	36	219	13.4	<b>219</b>	<b>13.4</b>	222	13.3							
657.xz_s	36	297	20.8	295	21.0	<b>295</b>	<b>20.9</b>							

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
IRQ balance service was stop using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

## Platform Notes

```
BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

Energy/Performance Bias set to Maximum Performance  
Workload Profile set to Custom  
NUMA Group Size Optimization set to Flat  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-0f29 Tue Nov 14 12:14:43 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz  
2 "physical id"s (chips)  
36 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 18  
siblings : 18  
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 36  
On-line CPU(s) list: 0-35  
Thread(s) per core: 1  
Core(s) per socket: 18  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz  
Stepping: 4  
CPU MHz: 2294.619  
BogoMIPS: 4589.23  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K  
NUMA node0 CPU(s): 0-17  
NUMA node1 CPU(s): 18-35  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 193116 MB
node 0 free: 192475 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 193532 MB
node 1 free: 192859 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

```
From /proc/meminfo
MemTotal:          395928244 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```
Linux linux-0f29 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 14 12:13

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	852G	44G	808G	6%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base)  
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.68

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-14 13:14:43-0500.

Report generated on 2018-10-31 15:03:01 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-12.