



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10


(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

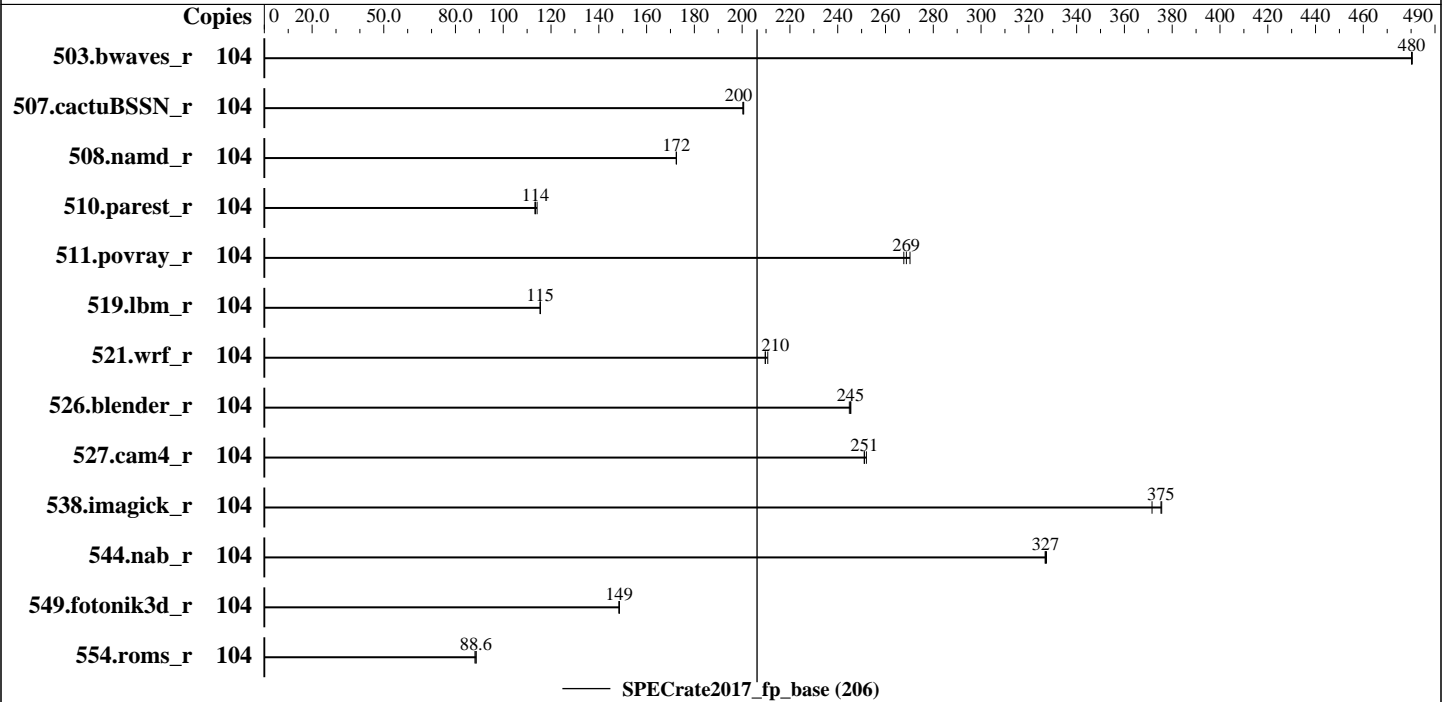

Hardware

CPU Name: Intel Xeon Platinum 8164
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 52 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version I42 released Oct-2017 (tested with I42 9/27/2017)
 File System: xfs
 System State: Run level 3 (mult-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2172	480	2170	481	<u>2172</u>	<u>480</u>							
507.cactuBSSN_r	104	657	200	657	200	656	201							
508.namd_r	104	573	172	<u>573</u>	<u>172</u>	573	173							
510.parest_r	104	2383	114	2397	114	2402	113							
511.povray_r	104	907	268	899	270	904	269							
519.lbm_r	104	948	116	949	115	949	115							
521.wrf_r	104	1106	211	1111	210	1111	210							
526.blender_r	104	646	245	645	245	647	245							
527.cam4_r	104	724	251	722	252	724	251							
538.imagick_r	104	689	375	689	376	696	372							
544.nab_r	104	535	327	535	327	536	327							
549.fotonik3d_r	104	2730	148	2728	149	2728	149							
554.roms_r	104	1864	88.6	1874	88.2	1866	88.6							

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

General Notes (Continued)

memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on sy480_hjp_suse Fri Nov 24 05:43:26 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz

Stepping: 4

CPU MHz: 1995.316

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

BogoMIPS:          3990.63
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          36608K
NUMA node0 CPU(s): 0-12,52-64
NUMA node1 CPU(s): 13-25,65-77
NUMA node2 CPU(s): 26-38,78-90
NUMA node3 CPU(s): 39-51,91-103
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 52 53 54 55 56 57 58 59 60 61 62 63 64
node 0 size: 96347 MB
node 0 free: 95938 MB
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 65 66 67 68 69 70 71 72 73 74 75 76
77
node 1 size: 96764 MB
node 1 free: 96396 MB
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 78 79 80 81 82 83 84 85 86 87 88 89
90
node 2 size: 96764 MB
node 2 free: 96413 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 96762 MB
node 3 free: 96349 MB
node distances:
node  0  1  2  3
0:  10  21  31  31
1:  21  10  31  31
2:  31  31  10  21
3:  31  31  21  10

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 395918220 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux sy480_hjp_suse 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 24 05:43

SPEC is set to: /home/cpu2017

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 xfs 407G 161G 247G 40% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 511.povray_r(base) 526.blender_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 507.cactuBSSN_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECrate2017_fp_base = 206

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-23 19:13:25-0500.

Report generated on 2018-10-31 17:13:32 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.