



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

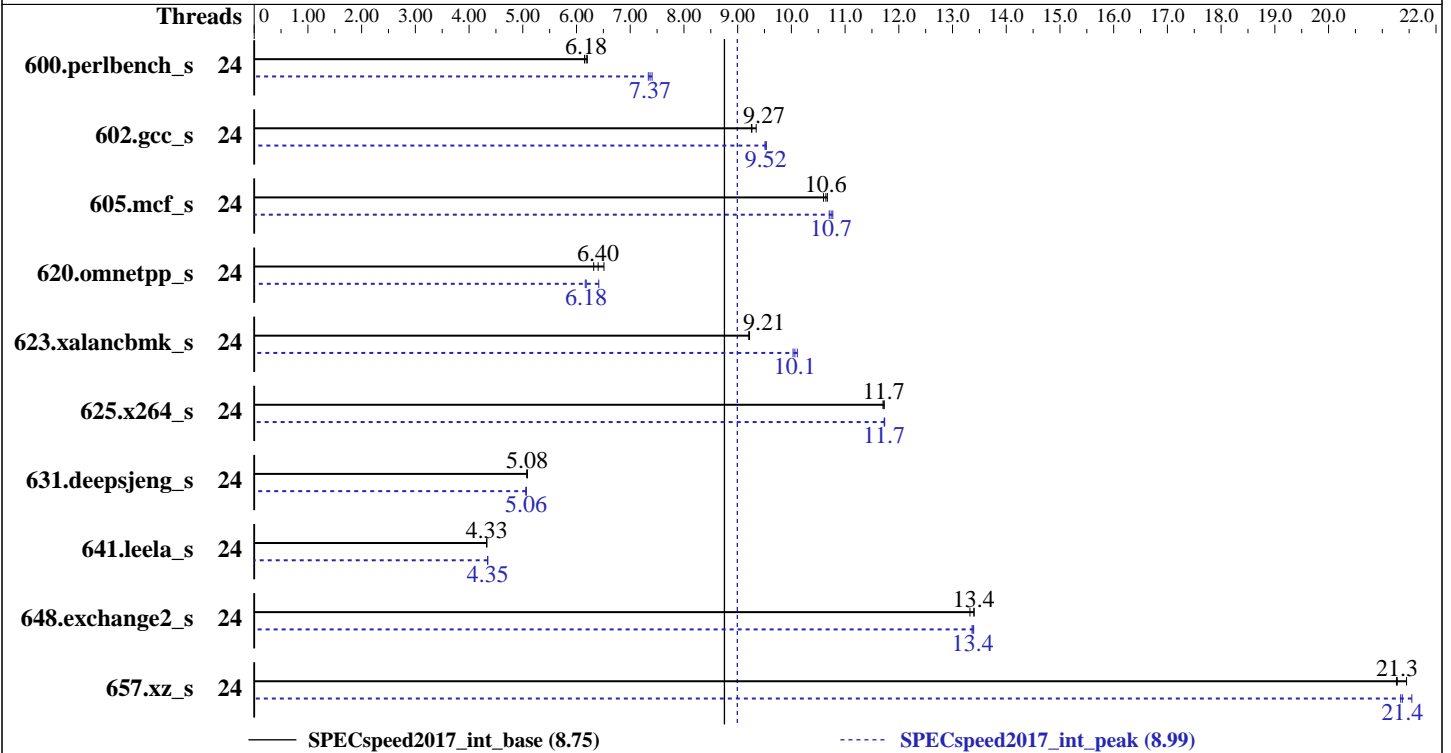

### Hardware

CPU Name: Intel Xeon Gold 6136  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version IVE109Q 1.00 released Jun-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;  
 jemalloc: configured and built at default for  
 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4,  
 and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or  
 releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2017  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	<b>287</b>	<b>6.18</b>	286	6.20	289	6.15	24	<b>241</b>	<b>7.37</b>	242	7.34	240	7.41
602.gcc_s	24	426	9.34	<b>430</b>	<b>9.27</b>	430	9.26	24	<b>418</b>	<b>9.52</b>	418	9.53	419	9.51
605.mcf_s	24	442	10.7	445	10.6	<b>444</b>	<b>10.6</b>	24	438	10.8	441	10.7	<b>440</b>	<b>10.7</b>
620.omnetpp_s	24	250	6.51	258	6.32	<b>255</b>	<b>6.40</b>	24	<b>264</b>	<b>6.18</b>	265	6.16	254	6.41
623.xalancbmk_s	24	<b>154</b>	<b>9.21</b>	154	9.22	154	9.21	24	<b>141</b>	<b>10.1</b>	140	10.1	141	10.0
625.x264_s	24	150	11.7	151	11.7	<b>150</b>	<b>11.7</b>	24	150	11.7	<b>150</b>	<b>11.7</b>	150	11.7
631.deepsjeng_s	24	<b>282</b>	<b>5.08</b>	282	5.07	282	5.09	24	283	5.06	283	5.06	<b>283</b>	<b>5.06</b>
641.leela_s	24	394	4.33	394	4.33	<b>394</b>	<b>4.33</b>	24	392	4.35	393	4.34	<b>393</b>	<b>4.35</b>
648.exchange2_s	24	221	13.3	<b>219</b>	<b>13.4</b>	219	13.4	24	220	13.4	<b>220</b>	<b>13.4</b>	220	13.4
657.xz_s	24	291	21.3	<b>291</b>	<b>21.3</b>	288	21.5	24	290	21.3	287	21.6	<b>289</b>	<b>21.4</b>

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 8.75

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
MONITORMWAIT set to Enable  
Adjacent Cache Prefetch set to Disable  
XPT Prefetcher set to Enable  
Stale AtoS set to Enable  
DCA set to Enable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on Cyborg-SPECcpu2006-SUSE12SP2 Tue Oct 24 22:24:48 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 12
physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 24
On-line CPU(s) list: 0-23
Thread(s) per core: 1
Core(s) per socket: 12
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 8.75

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                    85
Model name:               Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping:                 4
CPU MHz:                  2992.967
BogoMIPS:                 5985.93
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 25344K
NUMA node0 CPU(s):       0-11
NUMA node1 CPU(s):       12-23

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 193109 MB
node 0 free: 192296 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 193504 MB
node 1 free: 192812 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:      395892616 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux Cyborg-SPECcpu2006-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
  2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 24 22:23

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs    744G  173G  570G  24% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017
  Memory:
    24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
   peak) 657.xz_s(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Optimization Flags (Continued)

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk\_s: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 8.99

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-24 10:24:47-0400.

Report generated on 2018-10-31 16:51:14 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.