



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55


Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

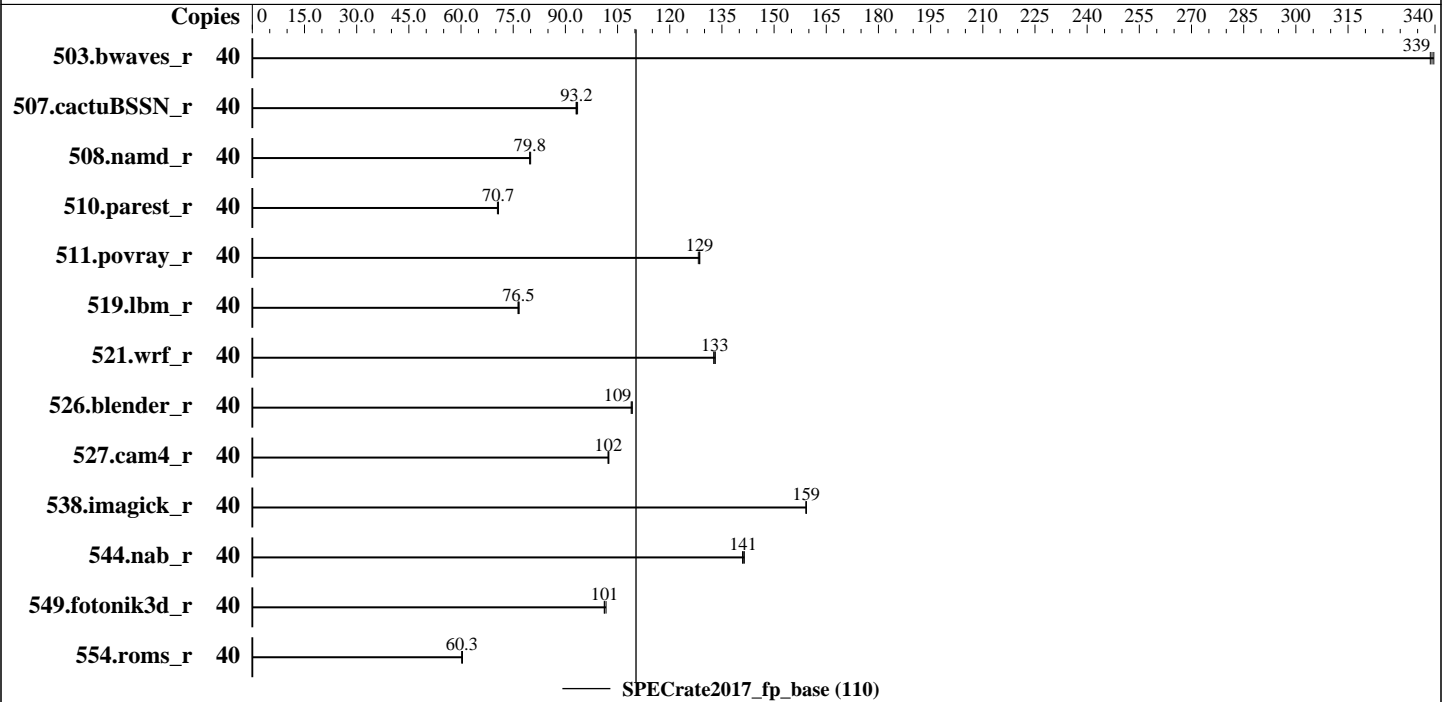

## Hardware

CPU Name: Intel Xeon Gold 5115  
 Max MHz.: 3200  
 Nominal: 2400  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Storage: 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.16-56-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.0 released Aug-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2017  
Hardware Availability: Sep-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	40	1181	340	1184	339	<b><u>1183</u></b>	<b><u>339</u></b>							
507.cactuBSSN_r	40	544	93.1	<b><u>543</u></b>	<b><u>93.2</u></b>	542	93.5							
508.namd_r	40	<b><u>476</u></b>	<b><u>79.8</u></b>	477	79.7	475	80.0							
510.parest_r	40	1479	70.7	<b><u>1480</u></b>	<b><u>70.7</u></b>	1485	70.5							
511.povray_r	40	726	129	728	128	<b><u>726</u></b>	<b><u>129</u></b>							
519.lbm_r	40	552	76.4	550	76.7	<b><u>551</u></b>	<b><u>76.5</u></b>							
521.wrf_r	40	676	133	673	133	<b><u>674</u></b>	<b><u>133</u></b>							
526.blender_r	40	<b><u>558</u></b>	<b><u>109</u></b>	558	109	559	109							
527.cam4_r	40	<b><u>683</u></b>	<b><u>102</u></b>	683	103	684	102							
538.imagick_r	40	<b><u>625</u></b>	<b><u>159</u></b>	625	159	625	159							
544.nab_r	40	<b><u>477</u></b>	<b><u>141</u></b>	476	141	478	141							
549.fotonik3d_r	40	1541	101	<b><u>1539</u></b>	<b><u>101</u></b>	1533	102							
554.roms_r	40	1052	60.4	<b><u>1055</u></b>	<b><u>60.3</u></b>	1056	60.2							

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## General Notes (Continued)

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States disabled

Memory Patrol Scrub disabled

PCI ASPM L1 Link Power Management disabled

sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-u8yg Sat Nov 4 09:52:42 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
Stepping:              4
CPU MHz:               2400.109
BogoMIPS:              4800.21
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              14080K
NUMA node0 CPU(s):    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38
NUMA node1 CPU(s):    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38
node 0 size: 95341 MB
node 0 free: 94771 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 1 size: 96736 MB
node 1 free: 96259 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo

```
MemTotal:      196687636 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-u8yg 4.4.16-56-default #1 SMP Mon Aug 8 14:24:26 UTC 2016 (5b281a8) x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 4 04:46

SPEC is set to: /root/cpu2017

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdal        btrfs    921G      34G  887G   4% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 08/10/2017

Memory:

```
12x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
4x Not Specified Not Specified
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 110

PowerEdge FC640 (Intel Xeon Gold 5115, 2.40 GHz)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 55

**Test Date:** Nov-2017

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Sep-2017

**Tested by:** Dell Inc.

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-04 10:52:41-0400.

Report generated on 2018-10-31 16:32:37 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.