



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

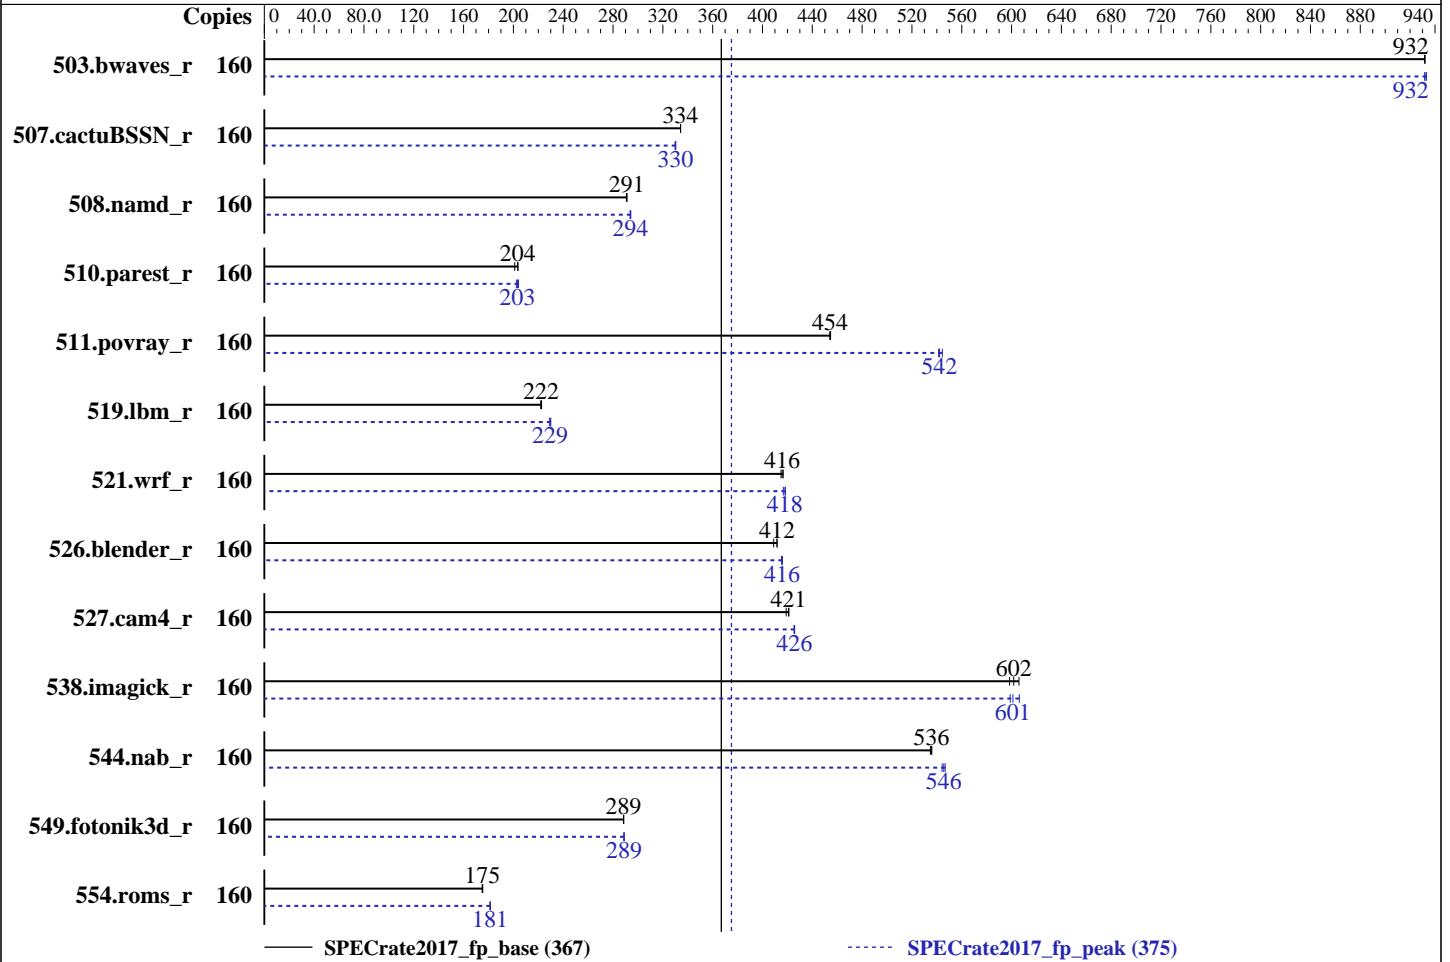

Hardware

CPU Name: Intel Xeon Gold 6138
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 80 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE115E 1.01 released Aug-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	1722	932	<u>1722</u>	<u>932</u>	1722	932	160	1722	932	<u>1722</u>	<u>932</u>	1719	933
507.cactuBSSN_r	160	<u>606</u>	<u>334</u>	606	334	606	334	160	614	330	<u>613</u>	<u>330</u>	613	330
508.namd_r	160	523	291	522	291	<u>522</u>	<u>291</u>	160	517	294	<u>517</u>	<u>294</u>	517	294
510.parest_r	160	2055	204	2082	201	<u>2057</u>	<u>204</u>	160	2051	204	<u>2059</u>	<u>203</u>	2068	202
511.povray_r	160	<u>822</u>	<u>454</u>	822	455	823	454	160	686	544	<u>689</u>	<u>542</u>	690	541
519.lbm_r	160	760	222	758	223	<u>758</u>	<u>222</u>	160	733	230	736	229	<u>735</u>	<u>229</u>
521.wrf_r	160	860	417	864	415	<u>862</u>	<u>416</u>	160	860	417	<u>857</u>	<u>418</u>	857	418
526.blender_r	160	592	412	596	409	<u>592</u>	<u>412</u>	160	587	415	<u>586</u>	<u>416</u>	586	416
527.cam4_r	160	664	421	<u>665</u>	<u>421</u>	668	419	160	<u>657</u>	<u>426</u>	658	425	657	426
538.imagick_r	160	657	606	665	598	<u>661</u>	<u>602</u>	160	664	599	656	606	<u>662</u>	<u>601</u>
544.nab_r	160	503	535	502	536	<u>503</u>	<u>536</u>	160	495	544	<u>494</u>	<u>546</u>	493	547
549.fotonik3d_r	160	2162	288	2161	289	<u>2161</u>	<u>289</u>	160	2159	289	2159	289	<u>2159</u>	<u>289</u>
554.roms_r	160	1453	175	<u>1452</u>	<u>175</u>	1450	175	160	1401	181	1403	181	<u>1402</u>	<u>181</u>

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

General Notes (Continued)

is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITORM/WAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on Electron-node-02 Thu Jan 11 10:57:11 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 367

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 160
On-line CPU(s) list:   0-159
Thread(s) per core:    2
Core(s) per socket:    20
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
Stepping:               4
CPU MHz:                1995.311
BogoMIPS:               3990.62
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               28160K
NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s):     40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s):     43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s):     60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s):     63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 193129 MB
node 0 free: 192565 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 193528 MB
node 1 free: 192974 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 193528 MB
node 2 free: 192992 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 193528 MB
node 3 free: 193018 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 193528 MB
node 4 free: 193009 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 193528 MB
node 5 free: 193020 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 193528 MB
node 6 free: 193027 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 193525 MB
node 7 free: 193019 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 31 31
  1: 11 10 21 21 21 21 31 31
  2: 21 21 10 11 31 31 21 21
  3: 21 21 11 10 31 31 21 21
  4: 21 21 31 31 10 11 21 21
  5: 21 21 31 31 11 10 21 21
  6: 31 31 21 21 21 21 10 11
  7: 31 31 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      1584974008 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Electron-node-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 11 10:39

SPEC is set to: /home/cpu2017.1.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   688G  130G  559G  19% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Lenovo  -[TEE115E-1.01]- 08/11/2017
Memory:
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----

icc (ICC) 18.0.0 20170811

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.00 GHz, Intel Xeon Gold 6138)

SPECrate2017_fp_base = 367

SPECrate2017_fp_peak = 375

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-01-10 21:57:10-0500.

Report generated on 2018-10-31 16:46:28 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.