



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

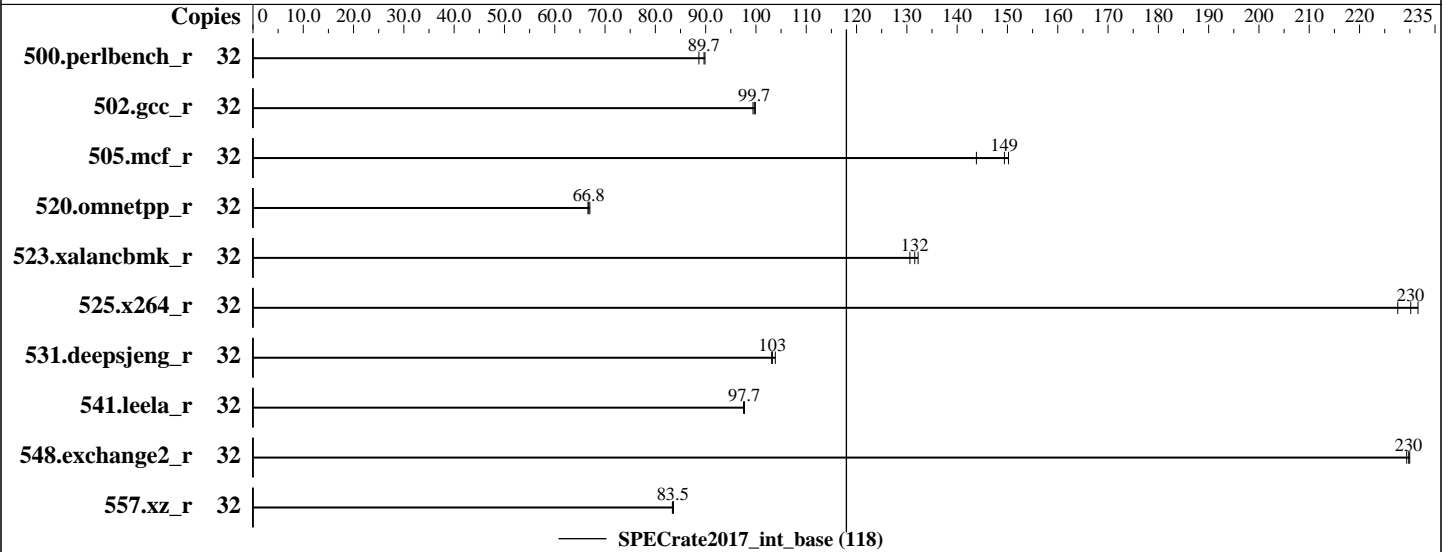

Hardware

CPU Name: Intel Xeon Gold 6144
 Max MHz.: 4200
 Nominal: 3500
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 192 GB tmpfs
 Other: 1 x SAS SSD, 400 GB, used for swap

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.114-92.64-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.12 R1.17.0 for D3384-A1x. Released Feb-2018
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	567	89.9	568	89.7	575	88.7							
502.gcc_r	32	455	99.7	454	99.9	456	99.4							
505.mcf_r	32	344	150	346	149	360	144							
520.omnetpp_r	32	627	67.0	630	66.6	629	66.8							
523.xalancbmk_r	32	256	132	259	131	257	132							
525.x264_r	32	242	232	243	230	246	228							
531.deepsjeng_r	32	355	103	353	104	356	103							
541.leela_r	32	543	97.5	542	97.7	542	97.7							
548.exchange2_r	32	365	230	366	229	365	230							
557.xz_r	32	414	83.4	414	83.5	413	83.6							

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-31
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=192g,rw tmpfs /home/memory
Process tuning settings:
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-32:/home/memory/speccpu/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

General Notes (Continued)

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
DCU Streamer Prefetcher = Disabled
Override OS Energy Performance = Enabled
Energy Performance = Performance
Package C State limit = C0
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
Fan Control = Full
Sysinfo program /home/memory/speccpu/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on RX2540M4-AB468 Wed Jun 6 02:24:08 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Platform Notes (Continued)

```
physical 0: cores 0 2 3 9 16 19 26 27
physical 1: cores 0 2 3 9 16 19 26 27
```

From `lscpu`:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
Stepping:               4
CPU MHz:                4063.196
CPU max MHz:            4200.0000
CPU min MHz:            1200.0000
BogoMIPS:               6983.55
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0,1,3,4,16,17,19,20
NUMA node1 CPU(s):     2,5-7,18,21-23
NUMA node2 CPU(s):     8,9,11,12,24,25,27,28
NUMA node3 CPU(s):     10,13-15,26,29-31
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From `numactl --hardware` WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 3 4 16 17 19 20
node 0 size: 95022 MB
node 0 free: 85790 MB
node 1 cpus: 2 5 6 7 18 21 22 23
node 1 size: 96760 MB
node 1 free: 96558 MB
node 2 cpus: 8 9 11 12 24 25 27 28
node 2 size: 96760 MB
node 2 free: 96567 MB
node 3 cpus: 10 13 14 15 26 29 30 31
node 3 size: 96623 MB
node 3 free: 96348 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394410752 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```

Linux RX2540M4-AB468 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018
(c6ce5db) x86_64 x86_64 x86_64 GNU/Linux

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144, 3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Platform Notes (Continued)

run-level 3 Jun 6 02:02

SPEC is set to: /home/memory/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	192G	8.8G	184G	5%	/home/memory

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.17.0 for D3384-A1x
02/08/2018

Memory:

24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144,
3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6144,
3.50GHz

SPECrate2017_int_base = 118

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-05 13:24:08-0400.

Report generated on 2018-10-31 17:21:48 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.