



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

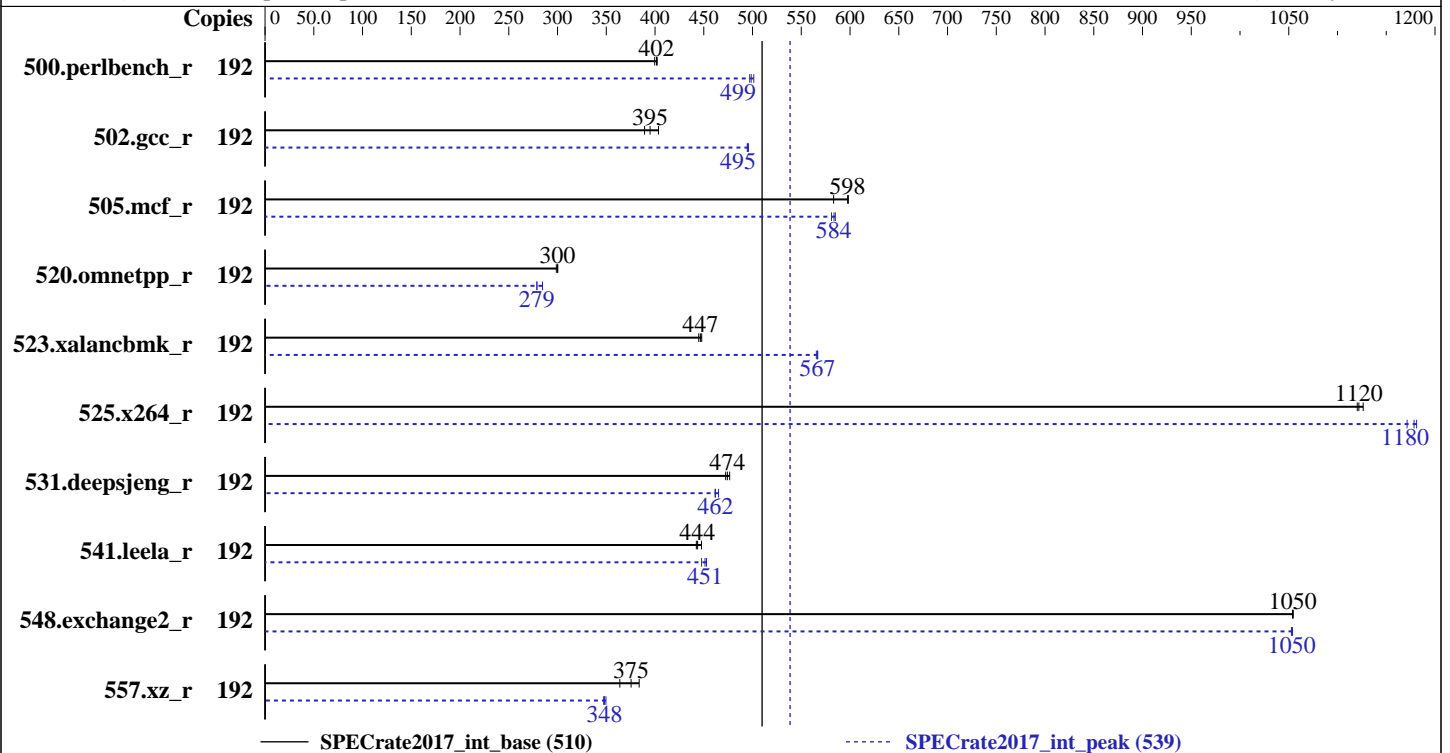

### Hardware

CPU Name: Intel Xeon Platinum 8168  
 Max MHz.: 3700  
 Nominal: 2700  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.120-92.70-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.0 released May-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358  
Test Sponsor: Inspur Corporation  
Tested by: Inspur Corporation

Test Date: Jun-2018  
Hardware Availability: May-2018  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	760	402	<b><u>761</u></b>	<b><u>402</u></b>	765	400	192	610	501	615	497	<b><u>613</u></b>	<b><u>499</u></b>
502.gcc_r	192	<b><u>688</u></b>	<b><u>395</u></b>	698	389	674	404	192	<b><u>549</u></b>	<b><u>495</u></b>	548	496	550	495
505.mcf_r	192	519	598	<b><u>519</u></b>	<b><u>598</u></b>	532	583	192	530	585	<b><u>532</u></b>	<b><u>584</u></b>	534	581
520.omnetpp_r	192	843	299	839	300	<b><u>839</u></b>	<b><u>300</u></b>	192	885	285	<b><u>903</u></b>	<b><u>279</u></b>	903	279
523.xalancbmk_r	192	456	445	<b><u>454</u></b>	<b><u>447</u></b>	453	448	192	358	567	359	565	<b><u>358</u></b>	<b><u>567</u></b>
525.x264_r	192	300	1120	298	1130	<b><u>300</u></b>	<b><u>1120</u></b>	192	<b><u>285</u></b>	<b><u>1180</u></b>	285	1180	287	1170
531.deepsjeng_r	192	466	472	<b><u>464</u></b>	<b><u>474</u></b>	462	477	192	477	462	<b><u>476</u></b>	<b><u>462</u></b>	473	465
541.leela_r	192	710	448	719	442	<b><u>717</u></b>	<b><u>444</u></b>	192	710	448	702	453	<b><u>705</u></b>	<b><u>451</u></b>
548.exchange2_r	192	477	1050	<b><u>477</u></b>	<b><u>1050</u></b>	477	1050	192	478	1050	<b><u>478</u></b>	<b><u>1050</u></b>	477	1050
557.xz_r	192	540	384	<b><u>552</u></b>	<b><u>375</u></b>	570	364	192	597	347	<b><u>596</u></b>	<b><u>348</u></b>	593	350

SPECrate2017\_int\_base = 510

SPECrate2017\_int\_peak = 539

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS and OS configuration:  
SCALING\_GOVNOR set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
ClE Support set to Disable  
IMC (Integrated memory controller) Interleaving set to 1-way  
Sub NUMA Cluster (SNC) set to Enable  
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-iq8e Tue Jun 12 11:59:20 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz  
4 "physical id"s (chips)  
192 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 48  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 192  
On-line CPU(s) list: 0-191  
Thread(s) per core: 2  
Core(s) per socket: 24

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Date: Jun-2018

Test Sponsor: Inspur Corporation

Hardware Availability: May-2018

Tested by: Inspur Corporation

Software Availability: May-2018

### Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping: 4
CPU MHz: 2623.483
CPU max MHz: 3700.0000
CPU min MHz: 1200.0000
BogoMIPS: 5400.11
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 191584 MB
node 0 free: 191282 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
119
node 1 size: 193528 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

### Platform Notes (Continued)

```

node 1 free: 193300 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 193528 MB
node 2 free: 193308 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 193528 MB
node 3 free: 193360 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 193528 MB
node 4 free: 193305 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 193528 MB
node 5 free: 193337 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 193528 MB
node 6 free: 193305 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 193378 MB
node 7 free: 193137 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  20  20  20  20  20  20  20
  1:  20  10  20  20  20  20  20  20
  2:  20  20  10  20  20  20  20  20
  3:  20  20  20  10  20  20  20  20
  4:  20  20  20  20  10  20  20  20
  5:  20  20  20  20  20  10  20  20
  6:  20  20  20  20  20  20  10  20
  7:  20  20  20  20  20  20  20  10

```

```

From /proc/meminfo
MemTotal:      1583240708 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Jun-2018  
**Hardware Availability:** May-2018  
**Software Availability:** May-2018

### Platform Notes (Continued)

```

VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-iq8e 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 12 11:58 last=5

SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   405G   17G  389G   5% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Inspur 4.0.00 05/10/2018
Memory:
48x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

## Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

## Base Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

## Peak Optimization Flags (Continued)

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 510

Inspur NF8480M5 (Intel Xeon Platinum 8168)

SPECrate2017\_int\_peak = 539

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Jun-2018

**Hardware Availability:** May-2018

**Software Availability:** May-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-12 11:59:19-0400.

Report generated on 2018-10-31 18:59:57 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.