



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 152

### Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Sep-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

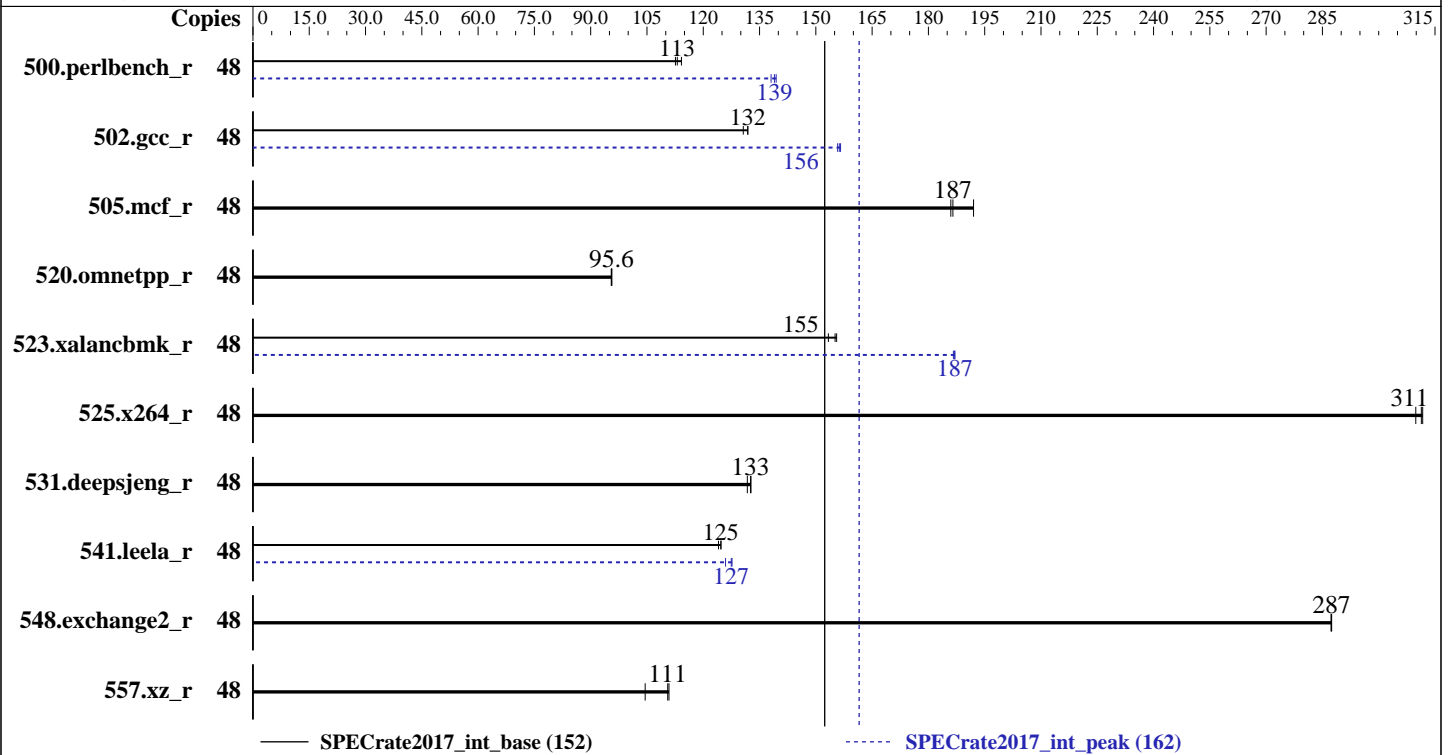

### Hardware

CPU Name: Intel Xeon Gold 6136  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 3.10.0-693.11.6.el7.x86\_64  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 0.80 Released Jun-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 152

## Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Sep-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	669	114	679	113	<b>676</b>	<b>113</b>	48	548	139	553	138	<b>550</b>	<b>139</b>
502.gcc_r	48	<b>515</b>	<b>132</b>	515	132	520	131	48	434	157	<b>435</b>	<b>156</b>	436	156
505.mcf_r	48	404	192	<b>416</b>	<b>187</b>	417	186	48	404	192	<b>416</b>	<b>187</b>	417	186
520.omnetpp_r	48	<b>659</b>	<b>95.6</b>	660	95.5	658	95.6	48	<b>659</b>	<b>95.6</b>	660	95.5	658	95.6
523.xalancbmk_r	48	326	156	<b>327</b>	<b>155</b>	331	153	48	271	187	272	187	<b>271</b>	<b>187</b>
525.x264_r	48	<b>270</b>	<b>311</b>	270	312	271	310	48	<b>270</b>	<b>311</b>	270	312	271	310
531.deepsjeng_r	48	414	133	<b>415</b>	<b>133</b>	418	132	48	414	133	<b>415</b>	<b>133</b>	418	132
541.leela_r	48	637	125	641	124	<b>638</b>	<b>125</b>	48	631	126	<b>624</b>	<b>127</b>	623	128
548.exchange2_r	48	437	287	<b>438</b>	<b>287</b>	438	287	48	437	287	<b>438</b>	<b>287</b>	438	287
557.xz_r	48	468	111	<b>469</b>	<b>111</b>	496	105	48	468	111	<b>469</b>	<b>111</b>	496	105

SPECrate2017\_int\_base = 152

SPECrate2017\_int\_peak = 162

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 152

Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Sep-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Power Policy Set to Performance  
SNC Set to Enabled  
IMC Interleaving Set to 1-way Interleave  
XPT Prefetch Set to Enabled  
Sysinfo program /spec2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost.localdomain Tue Sep 18 10:40:12 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz  
2 "physical id"s (chips)  
48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 12  
siblings : 24  
physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26  
physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 48  
On-line CPU(s) list: 0-47  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz  
Stepping: 4  
CPU MHz: 3000.000

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 152

## Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Sep-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

BogoMIPS:          6005.56
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          25344K
NUMA node0 CPU(s): 0-2,5,7,10,24-26,29,31,34
NUMA node1 CPU(s): 3,4,6,8,9,11,27,28,30,32,33,35
NUMA node2 CPU(s): 12-14,17,19,22,36-38,41,43,46
NUMA node3 CPU(s): 15,16,18,20,21,23,39,40,42,44,45,47

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 7 10 24 25 26 29 31 34
node 0 size: 96433 MB
node 0 free: 93854 MB
node 1 cpus: 3 4 6 8 9 11 27 28 30 32 33 35
node 1 size: 98304 MB
node 1 free: 95600 MB
node 2 cpus: 12 13 14 17 19 22 36 37 38 41 43 46
node 2 size: 98304 MB
node 2 free: 96023 MB
node 3 cpus: 15 16 18 20 21 23 39 40 42 44 45 47
node 3 size: 98304 MB
node 3 free: 96034 MB
node distances:
node   0   1   2   3
 0:   10  11  21  21
 1:   11  10  21  21
 2:   21  21  10  11
 3:   21  21  11  10

```

```

From /proc/meminfo
MemTotal:          394168644 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 152

## Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Sep-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 18 10:38
```

```
SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   400G  8.3G  392G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 0.80 06/27/2018
Memory:
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

```
-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)  
557.xz_r(peak)
```

```
-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 152

Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Sep-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

## Compiler Version Notes (Continued)

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 152

Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Sep-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 152

Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Sep-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 152

Huawei CH225 V5 (Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 162

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Sep-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-09-18 10:40:11-0400.

Report generated on 2018-10-31 19:04:59 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.