



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu


PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

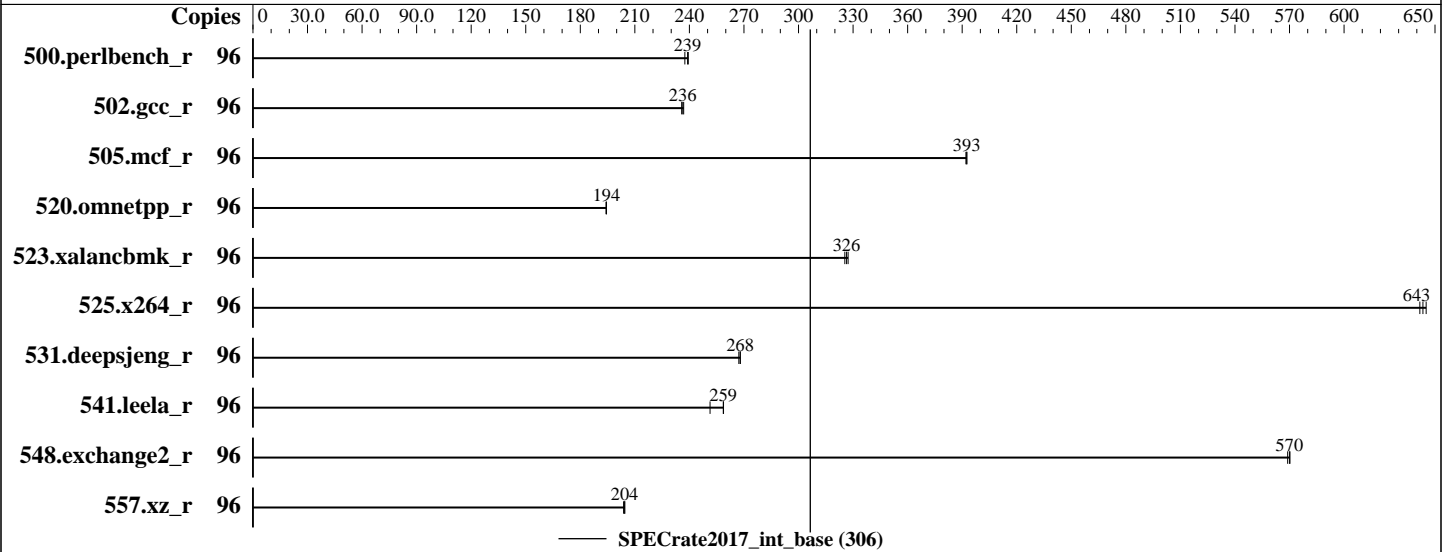

Hardware

CPU Name: Intel Xeon Platinum 8268
Max MHz.: 3900
Nominal: 2900
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x SATA M.2 SSD, 240GB
Other: None

Software

OS: SUSE Linux Enterprise Server 15
4.12.14-25.28-default
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
Compiler Build 20181018 for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran
Compiler Build 20181018 for Linux
Parallel: No
Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3383-B1x, Released Jun-2019 tested as V5.0.0.14 R1.2.0 for D3383-B1x Feb-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	639	239	644	238	638	239							
502.gcc_r	96	577	236	575	236	574	237							
505.mcf_r	96	395	393	395	393	396	392							
520.omnetpp_r	96	648	194	648	194	649	194							
523.xalancbmk_r	96	310	327	311	326	311	325							
525.x264_r	96	261	645	261	643	262	642							
531.deepsjeng_r	96	411	268	411	268	412	267							
541.leela_r	96	614	259	615	259	632	251							
548.exchange2_r	96	441	570	441	570	442	569							
557.xz_r	96	507	204	507	204	509	204							

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-111

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.0.5/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Patrol Scrub = Disabled
DCU Ip Prefetcher = Disabled
DCU Streamer Prefetcher = Disabled
Fan Control = Full
Stale AtoS = Enable
WR CRC feature Control = Disabled
Sysinfo program /home/Benchmark/speccpu2017-1.0.5/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on RX2530M5 Thu Mar 28 10:11:34 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 22 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping: 6
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

CPU MHz: 2900.000
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7,8,12-14,18-20,48-51,55,56,60-62,66-68
NUMA node1 CPU(s): 4-6,9-11,15-17,21-23,52-54,57-59,63-65,69-71
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44,72-75,79,80,84-86,90-92
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47,76-78,81-83,87-89,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 48 49 50 51 55 56 60 61 62 66 67 68
node 0 size: 191937 MB
node 0 free: 191623 MB
node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 52 53 54 57 58 59 63 64 65 69 70 71
node 1 size: 193531 MB
node 1 free: 193137 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 72 73 74 75 79 80 84 85 86 90 91 92
node 2 size: 193531 MB
node 2 free: 193212 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 76 77 78 81 82 83 87 88 89 93 94 95
node 3 size: 193318 MB
node 3 free: 193009 MB
node distances:
node 0 1 2 3
0: 10 11 21 21

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 790854796 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux RX2530M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
```

```
run-level 3 Mar 28 10:10
```

```
SPEC is set to: /home/Benchmark/speccpu2017-1.0.5
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 191G 57G 135G 30% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.2.0 for D3383-B1x
02/28/2019
```

```
Memory:
24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2019
Hardware Availability: May-2019
Software Availability: Feb-2019

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

=====
FC 548.exchange2_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8268, 2.90GHz

SPECrate2017_int_base = 306

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: May-2019

Software Availability: Feb-2019

Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-27 21:11:33-0400.

Report generated on 2019-05-23 13:00:04 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.