



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_base = 320

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

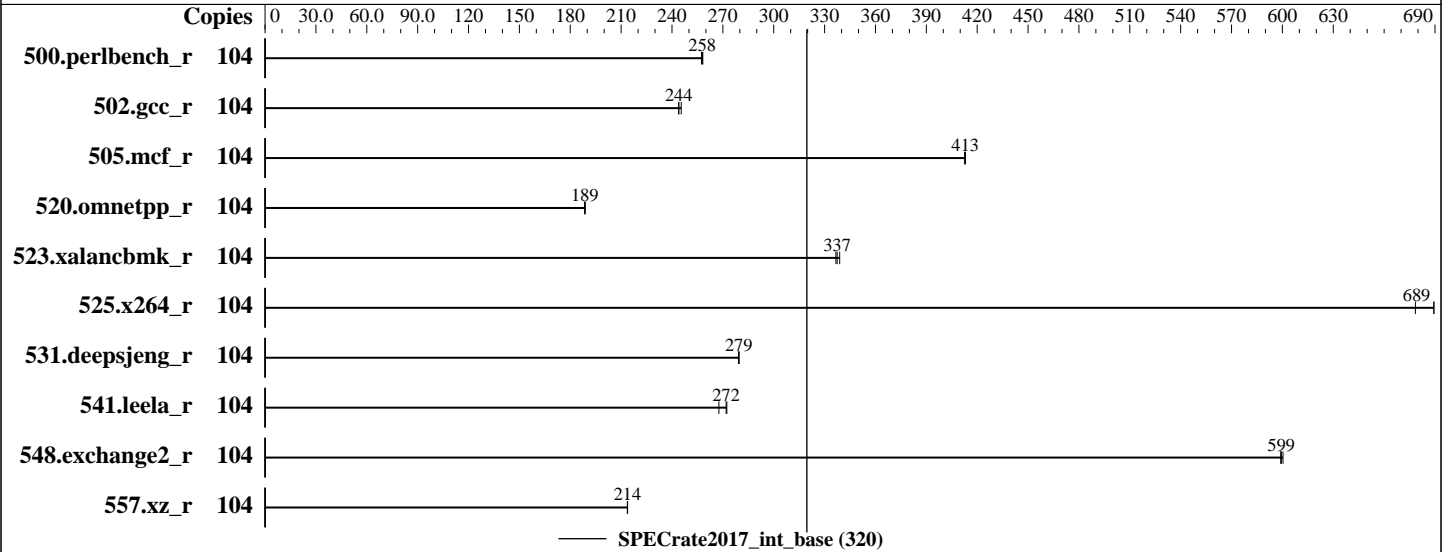

Hardware

CPU Name: Intel Xeon Platinum 8270
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 52 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version OTE135R 2.10 released Feb-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	642	258	643	257	641	258							
502.gcc_r	104	603	244	600	245	604	244							
505.mcf_r	104	407	413	407	413	407	413							
520.omnetpp_r	104	723	189	724	189	724	189							
523.xalancbmk_r	104	326	337	325	337	324	339							
525.x264_r	104	268	678	264	689	264	689							
531.deepsjeng_r	104	426	280	427	279	427	279							
541.leela_r	104	643	268	633	272	632	272							
548.exchange2_r	104	455	599	455	599	454	600							
557.xz_r	104	526	214	525	214	525	214							

SPECrate2017_int_base = 320

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

MONITOR/MWAIT set to Enable

DCU Streamer Prefetcher set to Disable

SNC set to Enable

LLC dead line alloc set to Disable

 Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo

 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

 running on linux-y34g Tue May 7 21:21:44 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

 model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz

 2 "physical id"s (chips)

 104 "processors"

 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

 cpu cores : 26

 siblings : 52

 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:           6
CPU MHz:            2700.000
CPU max MHz:        4000.0000
CPU min MHz:        1000.0000
BogoMIPS:           5400.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s): 4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s): 26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s): 30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 96364 MB
node 0 free: 95893 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 96723 MB
node 1 free: 95322 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 96752 MB
node 2 free: 96355 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```

102 103
node 3 size: 96750 MB
node 3 free: 96040 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

From /proc/meminfo
MemTotal:      395868984 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-y34g 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 May 7 19:54

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdb3       xfs       446G      46G  400G  11% /

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[OTE135R-2.10]- 02/25/2019

Memory:

4x NO DIMM NO DIMM

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 320

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_base = 320

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-07 21:21:44-0400.

Report generated on 2019-05-29 16:46:55 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.