



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55


Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2019

Tested by: Dell Inc.

Software Availability: May-2019

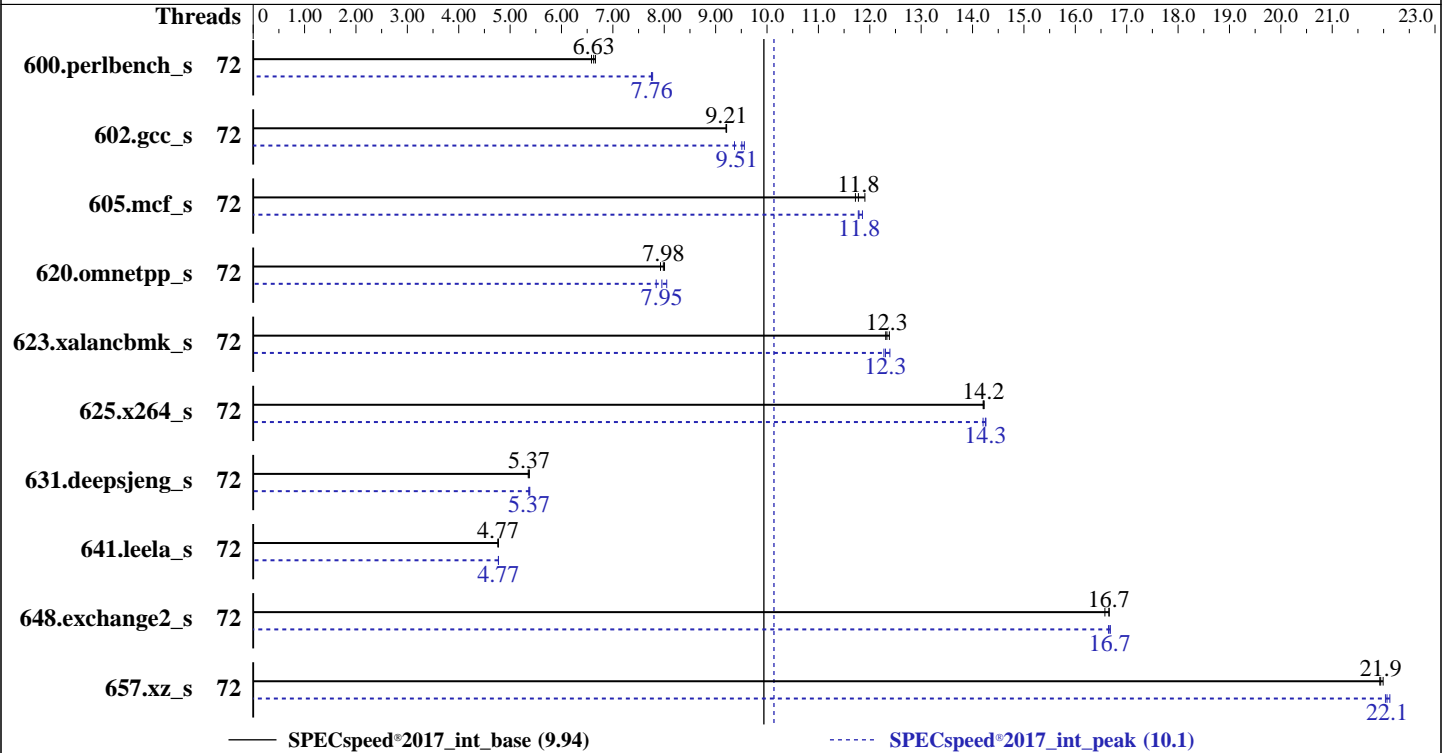

Hardware

CPU Name: Intel Xeon Gold 5220
 Max MHz: 3900
 Nominal: 2200
 Enabled: 72 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15.0-45-generic
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: Yes
 Firmware: Version 2.2.9 released May-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECSpeed®2017_int_peak = 10.1

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	72	270	6.58	266	6.66	268	6.63	72	229	7.75	228	7.77	229	7.76
602.gcc_s	72	432	9.21	433	9.20	432	9.21	72	419	9.51	417	9.56	425	9.37
605.mcf_s	72	397	11.9	401	11.8	403	11.7	72	401	11.8	400	11.8	398	11.9
620.omnetpp_s	72	206	7.93	204	8.01	204	7.98	72	205	7.95	208	7.84	203	8.05
623.xalancbmk_s	72	114	12.4	115	12.3	115	12.3	72	114	12.4	115	12.3	115	12.3
625.x264_s	72	124	14.2	124	14.2	124	14.2	72	124	14.2	124	14.3	124	14.3
631.deepsjeng_s	72	267	5.37	268	5.35	267	5.37	72	267	5.37	266	5.38	267	5.37
641.leela_s	72	358	4.76	358	4.77	357	4.77	72	357	4.77	357	4.77	357	4.77
648.exchange2_s	72	177	16.6	176	16.7	177	16.7	72	176	16.7	176	16.7	177	16.6
657.xz_s	72	282	21.9	281	22.0	282	21.9	72	279	22.1	281	22.0	280	22.1

SPECSpeed®2017_int_base = **9.94**

SPECSpeed®2017_int_peak = **10.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

ADDDC setting disabled

Sub NUMA Cluster disabled

Virtualization Technology disabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor disabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on intel-sut Fri Sep 6 00:37:00 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz

4 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 18

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 1

Core(s) per socket: 18

Socket(s): 4

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz

Stepping: 6

CPU MHz: 3399.299

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Platform Notes (Continued)

```

BogoMIPS:          4400.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          25344K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68
node 0 size: 191914 MB
node 0 free: 191631 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69
node 1 size: 193532 MB
node 1 free: 193232 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70
node 2 size: 193532 MB
node 2 free: 193248 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71
node 3 size: 193509 MB
node 3 free: 193217 MB
node distances:
node  0  1  2  3
 0:  10  21  31  21
 1:  21  10  21  31
 2:  31  21  10  21
 3:  21  31  21  10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      791029752 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB

run-level 5 Sep 5 22:11

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   37G  380G   9% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 2.2.9 05/08/2019
Memory:
24x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2666
24x Not Specified Not Specified

(End of data from sysinfo program)

```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Base Portability Flags (Continued)

```
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
623.xalanbmk_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

631.deepsjeng_s: Same as 623.xalanbmk_s

641.leela_s: Same as 623.xalanbmk_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.94

PowerEdge R840 (Intel Xeon Gold 5220, 2.20GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2019

Hardware Availability: Jun-2019

Software Availability: May-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-05 20:36:59-0400.

Report generated on 2019-10-01 14:12:06 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.