



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz, AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

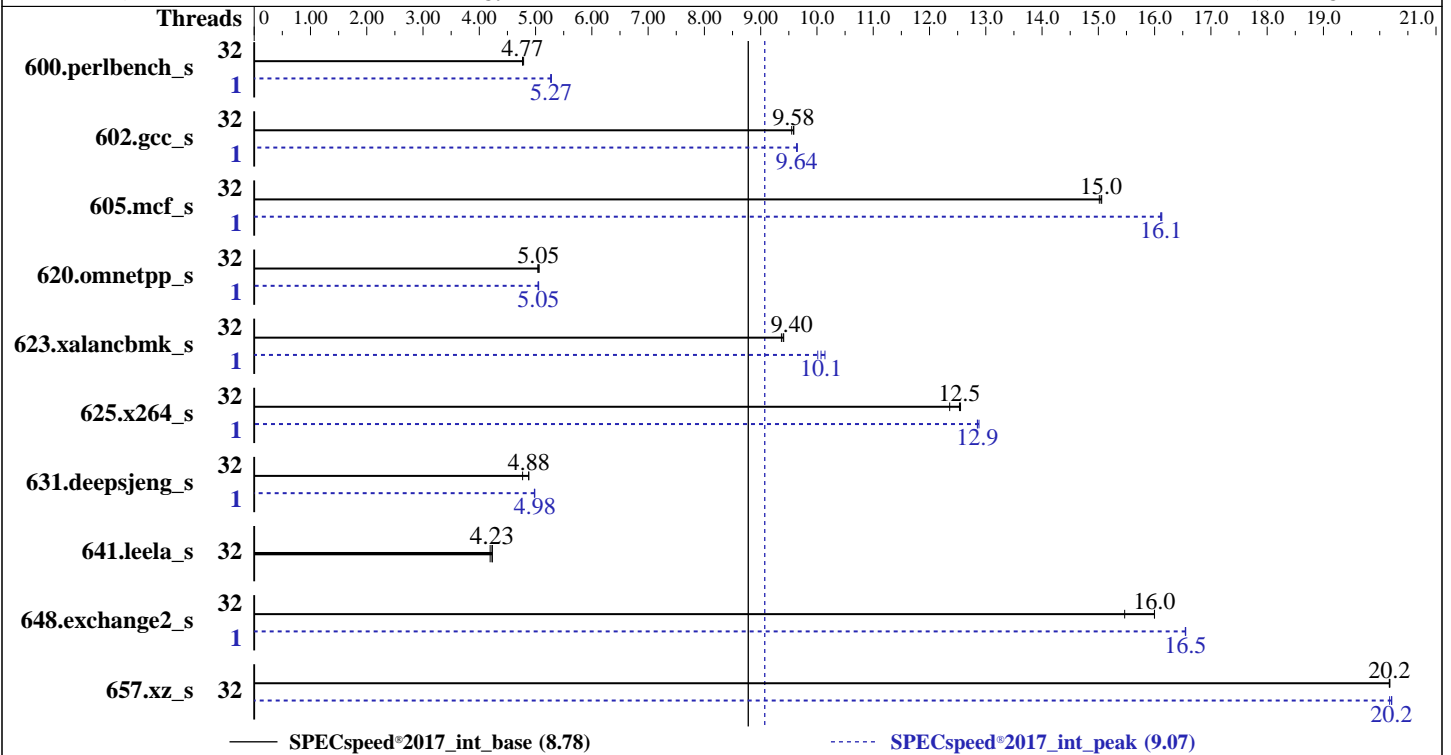

### Hardware

CPU Name: AMD EPYC 7452  
 Max MHz: 3350  
 Nominal: 2350  
 Enabled: 32 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.0 (Ootpa)  
 Kernel 4.18.0-80.el8.x86\_64  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CFE103L released Aug-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library version 5.2.0  
 Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	371	4.79	372	4.77	<b><u>372</u></b>	<b><u>4.77</u></b>	1	337	5.27	336	5.28	<b><u>337</u></b>	<b><u>5.27</u></b>
602.gcc_s	32	415	9.59	<b><u>415</u></b>	<b><u>9.58</u></b>	417	9.55	1	413	9.65	413	9.64	<b><u>413</u></b>	<b><u>9.64</u></b>
605.mcf_s	32	313	15.1	314	15.0	<b><u>314</u></b>	<b><u>15.0</u></b>	1	293	16.1	293	16.1	<b><u>293</u></b>	<b><u>16.1</u></b>
620.omnetpp_s	32	<b><u>323</u></b>	<b><u>5.05</u></b>	324	5.04	322	5.06	1	<b><u>323</u></b>	<b><u>5.05</u></b>	323	5.05	323	5.04
623.xalancbmk_s	32	151	9.37	151	9.41	<b><u>151</u></b>	<b><u>9.40</u></b>	1	<b><u>141</u></b>	<b><u>10.1</u></b>	140	10.1	141	10.0
625.x264_s	32	<b><u>141</u></b>	<b><u>12.5</u></b>	141	12.6	143	12.4	1	<b><u>137</u></b>	<b><u>12.9</u></b>	137	12.9	137	12.9
631.deepsjeng_s	32	294	4.88	<b><u>294</u></b>	<b><u>4.88</u></b>	300	4.77	1	<b><u>288</u></b>	<b><u>4.98</u></b>	288	4.98	288	4.98
641.leela_s	32	403	4.23	407	4.19	<b><u>404</u></b>	<b><u>4.23</u></b>	32	403	4.23	407	4.19	<b><u>404</u></b>	<b><u>4.23</u></b>
648.exchange2_s	32	184	16.0	<b><u>184</u></b>	<b><u>16.0</u></b>	190	15.5	1	178	16.6	<b><u>178</u></b>	<b><u>16.5</u></b>	178	16.5
657.xz_s	32	<b><u>306</u></b>	<b><u>20.2</u></b>	306	20.2	306	20.2	32	306	20.2	<b><u>306</u></b>	<b><u>20.2</u></b>	306	20.2

SPECspeed®2017\_int\_base = **8.78**

SPECspeed®2017\_int\_peak = **9.07**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

### General Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-amd-rome-aocc200/amd\_speed\_aocc200\_rome\_A\_lib/64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-amd-rome-aocc200/amd\_speed\_aocc200\_rome\_A\_lib/32"  
MALLOCONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"  
Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26  
  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

### Platform Notes

BIOS settings:  
Operating Mode set to Maximum Performance  
SMT Mode set to Disabled  
EfficiencyModeEn set to Auto  
NUMA nodes per socket set to NPS4  
Sysinfo program /home/cpu2017-1.0.5-amd-rome-aocc200/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on localhost.localdomain Tue Sep 3 23:51:18 2019  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>  
  
From /proc/cpuinfo  
model name : AMD EPYC 7452 32-Core Processor

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```
1 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7452 32-Core Processor
Stepping:               0
CPU MHz:                3285.677
CPU max MHz:            2350.0000
CPU min MHz:            1500.0000
BogoMIPS:               4690.75
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-7
NUMA node1 CPU(s):     8-15
NUMA node2 CPU(s):     16-23
NUMA node3 CPU(s):     24-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 6 7  
node 0 size: 64304 MB  
node 0 free: 63981 MB  
node 1 cpus: 8 9 10 11 12 13 14 15  
node 1 size: 64474 MB  
node 1 free: 64255 MB  
node 2 cpus: 16 17 18 19 20 21 22 23  
node 2 size: 64498 MB  
node 2 free: 64307 MB  
node 3 cpus: 24 25 26 27 28 29 30 31  
node 3 size: 64484 MB  
node 3 free: 64255 MB  
node distances:  
node 0 1 2 3  
0: 10 12 12 12  
1: 12 10 12 12  
2: 12 12 10 12  
3: 12 12 12 10
```

```
From /proc/meminfo  
MemTotal: 263948888 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
NAME="Red Hat Enterprise Linux"  
VERSION="8.0 (Ootpa)"  
ID="rhel"  
ID_LIKE="fedora"  
VERSION_ID="8.0"  
PLATFORM_ID="platform:el8"  
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"  
ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```
uname -a:
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: disabled, RSB filling
```

```
run-level 3 Sep 3 23:43
```

```
SPEC is set to: /home/cpu2017-1.0.5-amd-rome-aocc200
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   838G  42G  796G   5% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo          CFE103L 08/19/2019
Memory:
 8x Samsung M393A4K40DB2-CWE 32 kB 2 rank 3200
 8x Unknown Unknown
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 623.xalancbmk_s(peak)  
=====
```

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
C++ | 623.xalancbmk\_s(peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====  
Fortran | 648.exchange2\_s(base, peak)

-----  
AOCCLLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B179.2019\_06\_12)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz, AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.35 GHz, AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.35 GHz, AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc
```

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 8.78

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_peak = 9.07

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

620.omnetpp\_s (continued):

```
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

623.xalancbmk\_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.35 GHz,AMD EPYC 7452

SPECspeed®2017\_int\_base = 8.78

SPECspeed®2017\_int\_peak = 9.07

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Aug-2019

## Peak Other Flags (Continued)

623.xalancbmk\_s: -Wno-return-type

-L/sppo/dev/cpu2017/amd\_speed\_aocc200\_rome/amd\_speed\_aocc200\_rome\_A\_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-A.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-03 11:51:17-0400.

Report generated on 2019-10-01 14:17:45 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.