



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55


Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

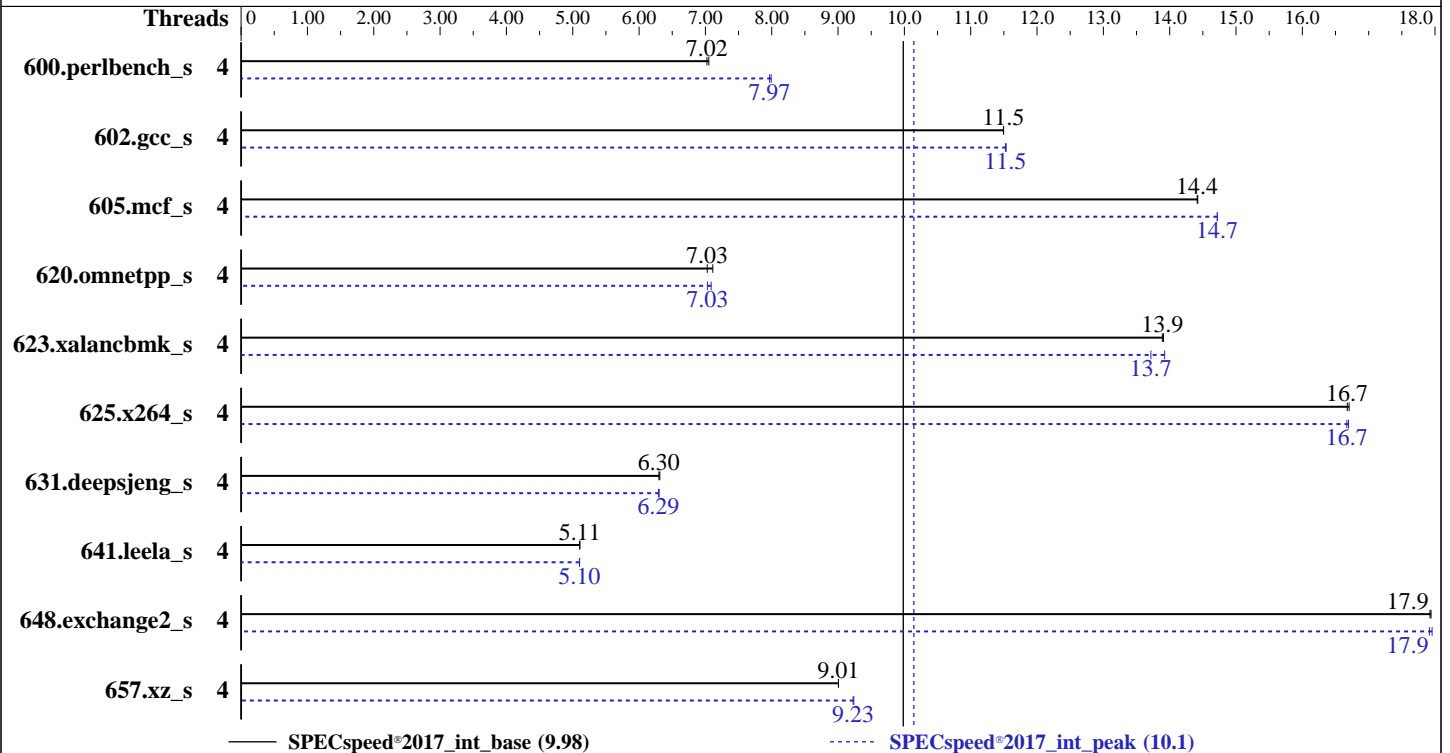

Hardware

CPU Name: Intel Xeon E-2224G
 Max MHz: 4700
 Nominal: 3500
 Enabled: 4 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 8 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler Build 20190416 for Linux
 Parallel: Yes
 Firmware: Version 2.1.6 released Sep-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Dec-2019
Software Availability: Jun-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	4	253	7.02	252	7.05			4	223	7.97	222	7.99		
602.gcc_s	4	346	11.5	346	11.5			4	346	11.5	345	11.5		
605.mcf_s	4	328	14.4	327	14.4			4	321	14.7	321	14.7		
620.omnetpp_s	4	229	7.11	232	7.03			4	230	7.09	232	7.03		
623.xalancbmk_s	4	102	13.9	102	13.9			4	103	13.7	102	13.9		
625.x264_s	4	106	16.7	106	16.7			4	106	16.7	106	16.7		
631.deepsjeng_s	4	227	6.30	227	6.31			4	227	6.30	228	6.29		
641.leela_s	4	334	5.11	334	5.11			4	334	5.10	334	5.10		
648.exchange2_s	4	164	17.9	164	17.9			4	164	17.9	164	18.0		
657.xz_s	4	686	9.01	686	9.01			4	669	9.24	670	9.23		

SPECspeed®2017_int_base = 9.98

SPECspeed®2017_int_peak = 10.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
"/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/lib/intel64:/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor disabled
CPU Interconnect Bus Link Power Management enabled
PCI ASPM L1 Link Power Management enabled

Sysinfo program /home/cpu2017/ODM-SPECcpu2017-194/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-g3ob Wed Jan 15 05:18:56 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2224G CPU @ 3.50GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 39 bits physical, 48 bits virtual
CPU(s): 4
On-line CPU(s) list: 0-3
Thread(s) per core: 1
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

Platform Notes (Continued)

```

Core(s) per socket: 4
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Xeon(R) E-2224G CPU @ 3.50GHz
Stepping: 10
CPU MHz: 3500.000
BogoMIPS: 7008.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt
xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts md_clear flush_lld

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64259 MB
node 0 free: 63504 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65801564 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

Platform Notes (Continued)

```

VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion
Microarchitectural Data Sampling:      Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown):              Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted
Speculation, IBPB: conditional, IBRS_FW, STIBP:
disabled, RSB filling

```

run-level 3 Jan 15 05:15 last=5

SPEC is set to: /home/cpu2017/ODM-SPECcpu2017-194/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   440G   30G  411G   7% /

```

From /sys/devices/virtual/dmi/id

```

BIOS:      Dell Inc. 2.1.6 09/27/2018
Vendor:    Dell Inc.
Product:   PowerEdge T140
Product Family: PowerEdge

```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

2x 00AD00000A02 HMA82GU7CJR8N-VK 16 GB 2 rank 2666
2x 00AD00000A07 HMA82GU7CJR8N-VK 16 GB 2 rank 2666

```

(End of data from sysinfo program)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

Base Portability Flags (Continued)

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
623.xalanbmk_s: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

631.deepsjeng_s: Same as 623.xalanbmk_s

641.leela_s: Same as 623.xalanbmk_s

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 9.98

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECspeed®2017_int_peak = 10.1

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Dec-2019

Software Availability: Jun-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-15 06:18:56-0500.

Report generated on 2020-03-02 11:48:33 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-29.