



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2020  
Hardware Availability: Dec-2019  
Software Availability: Aug-2019

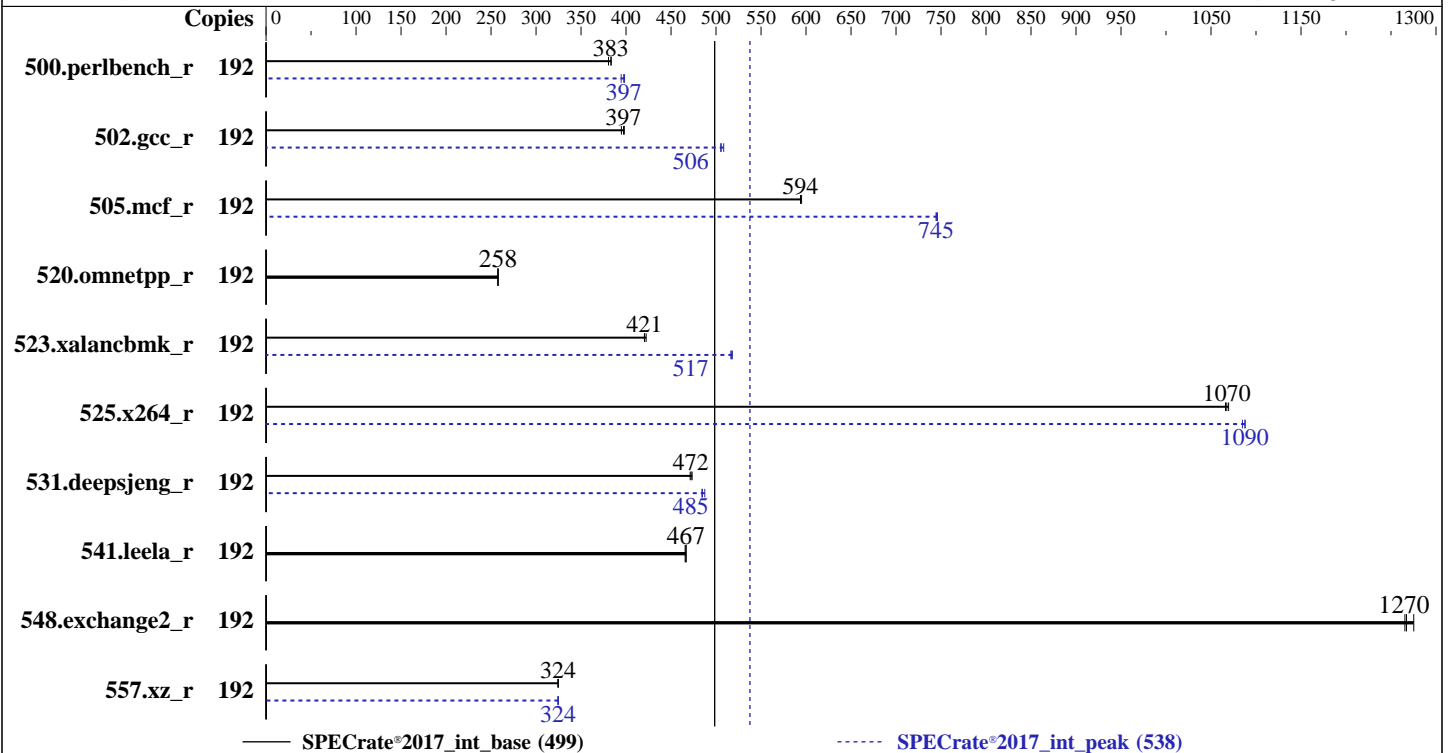

### Hardware

CPU Name: AMD EPYC 7552  
 Max MHz: 3300  
 Nominal: 2200  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 192 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 800 GB SAS SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) SP1  
 Kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version A42 12/12/2019 released Dec-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2020  
Hardware Availability: Dec-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	<b>798</b>	<b>383</b>	803	381	797	384	192	775	395	<b>769</b>	<b>397</b>	767	398
502.gcc_r	192	683	398	689	395	<b>684</b>	<b>397</b>	192	<b>538</b>	<b>506</b>	535	509	538	505
505.mcf_r	192	522	594	<b>522</b>	<b>594</b>	521	595	192	417	745	416	746	<b>417</b>	<b>745</b>
520.omnetpp_r	192	<b>977</b>	<b>258</b>	978	257	977	258	192	<b>977</b>	<b>258</b>	978	257	977	258
523.xalancbmk_r	192	<b>482</b>	<b>421</b>	482	420	480	422	192	<b>392</b>	<b>517</b>	392	517	391	518
525.x264_r	192	314	1070	315	1070	<b>315</b>	<b>1070</b>	192	309	1090	310	1080	<b>309</b>	<b>1090</b>
531.deepsjeng_r	192	<b>466</b>	<b>472</b>	467	471	465	473	192	451	487	<b>454</b>	<b>485</b>	454	484
541.leela_r	192	<b>681</b>	<b>467</b>	683	466	681	467	192	<b>681</b>	<b>467</b>	683	466	681	467
548.exchange2_r	192	394	1280	398	1270	<b>397</b>	<b>1270</b>	192	394	1280	398	1270	<b>397</b>	<b>1270</b>
557.xz_r	192	638	325	<b>639</b>	<b>324</b>	639	324	192	638	325	<b>639</b>	<b>324</b>	639	324

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-bbn/amd\_rate\_aocc200\_rome\_C\_lib/64:/home/cpu2017-bbn/amd\_rate\_aocc200\_rome\_C\_lib/32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Configuration  
Thermal Configuration set to Maximum Cooling  
Performance Determinism set to Power Deterministic  
Minimum Processor Idle Power core C-State set to C6 State  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Throughput Compute  
NUMA memory domains per socket set to Four memory domains per socket  
C-State Efficiency mode set to Enabled

Sysinfo program /home/cpu2017-bbn/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-30t0 Thu Feb 14 20:05:38 2019

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7552 48-Core Processor
 2 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 48
siblings  : 96
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                192
On-line CPU(s) list:  0-191
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             2
NUMA node(s):         4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7552 48-Core Processor
Stepping:              0
CPU MHz:               2195.959
BogoMIPS:              4391.91
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-23,96-119
NUMA node1 CPU(s):    24-47,120-143
NUMA node2 CPU(s):    48-71,144-167
NUMA node3 CPU(s):    72-95,168-191
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

```
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99
100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
node 0 size: 257726 MB
node 0 free: 257314 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
142 143
node 1 size: 258025 MB
node 1 free: 257647 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
166 167
node 2 size: 258007 MB
node 2 free: 257684 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189
190 191
node 3 size: 258035 MB
node 3 free: 257576 MB
node distances:
node  0  1  2  3
 0:  10  12  32  32
 1:  12  10  32  32
 2:  32  32  10  12
 3:  32  32  12  10
```

```
From /proc/meminfo
MemTotal: 1056558596 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

```
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-30t0 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

```
run-level 3 Feb 14 19:51
```

```
SPEC is set to: /home/cpu2017-bbn
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdc2       btrfs    743G   26G  717G   4% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      HPE A42 12/12/2019
Vendor:    HPE
Product:   ProLiant DL385 Gen10 Plus
Product Family: ProLiant
Serial:    CN79310517
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
16x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 523.xalanbmk\_r(peak)

-----  
AOCCLLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
AOCCLLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCCLLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate<sup>®</sup>2017\_int\_base = 499**

**SPECrate<sup>®</sup>2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10 Plus**  
(2.20 GHz, AMD EPYC 7552)

**SPECrate®2017\_int\_base = 499**

**SPECrate®2017\_int\_peak = 538**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng\_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc  
-lflang

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/sppo/dev/cpu2017/v110/amd\_rate\_aocc200\_rome\_C\_lib/32

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.20 GHz, AMD EPYC 7552)

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 538

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Peak Other Flags (Continued)

C++ benchmarks:

523.xalancbmk\_r: -L/sppo/dev/cpu2017/v1110/amd\_rate\_aocc200\_rome\_C\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-02-14 09:35:37-0500.

Report generated on 2020-04-14 14:07:30 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.