



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 4.94

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2019

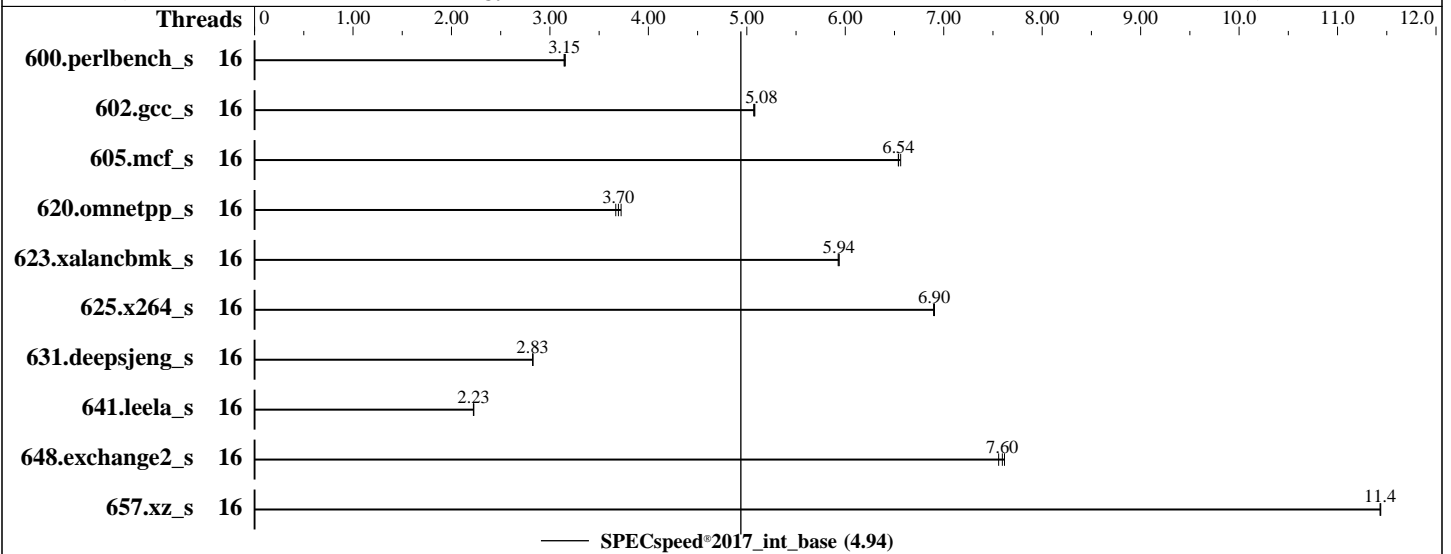

### Hardware

CPU Name: Intel Xeon Bronze 3206R  
 Max MHz: 1900  
 Nominal: 1900  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2133)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version TEE152L 2.51 released Feb-2020  
 tested as TEE151L 2.51 Jan-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_base = 4.94

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2020  
Hardware Availability: Mar-2020  
Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	562	3.16	565	3.14	<b>564</b>	<b>3.15</b>							
602.gcc_s	16	<b>784</b>	<b>5.08</b>	784	5.08	785	5.07							
605.mcf_s	16	719	6.56	722	6.54	<b>722</b>	<b>6.54</b>							
620.omnetpp_s	16	445	3.67	<b>441</b>	<b>3.70</b>	438	3.72							
623.xalancbmk_s	16	<b>239</b>	<b>5.94</b>	239	5.94	239	5.93							
625.x264_s	16	256	6.90	<b>256</b>	<b>6.90</b>	255	6.91							
631.deepsjeng_s	16	<b>507</b>	<b>2.83</b>	507	2.82	507	2.83							
641.leela_s	16	768	2.22	<b>767</b>	<b>2.23</b>	766	2.23							
648.exchange2_s	16	386	7.62	389	7.56	<b>387</b>	<b>7.60</b>							
657.xz_s	16	<b>541</b>	<b>11.4</b>	540	11.4	541	11.4							

SPECspeed®2017\_int\_base = 4.94

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64:/home/cpu2017-1.1.0-ic19.0u4/j
  e5.0.1-64"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 4.94

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
 Memory Power Management set to Automatic  
 CPU P-state Control set to Cooperative  
 MONITOR/MWAIT set to Enable  
 LLC dead line alloc set to Disable

```

Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-h3af Tue Mar 17 14:44:56 2020
  
```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
 2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
  
```

```

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 48 bits virtual
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
  
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 4.94

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2019

### Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping:           7
CPU MHz:            1900.000
CPU max MHz:        1900.0000
CPU min MHz:        1000.0000
BogoMIPS:           3800.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           11264K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke
avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 193124 MB
node 0 free: 192139 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 193533 MB
node 1 free: 192971 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 4.94

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2019

### Platform Notes (Continued)

MemTotal: 395938476 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-h3af 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 Mar 17 10:22

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 743G 34G 710G 5% /
```

```
From /sys/devices/virtual/dmi/id
BIOS: Lenovo -[TEE151L-2.51]- 01/13/2020
Vendor: Lenovo
Product: ThinkSystem SR550 -[7X03RCZ000]-
Product Family: ThinkSystem
Serial: 1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_base = 4.94

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Jun-2019

### Platform Notes (Continued)

Memory:  
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base)  
| 625.x264\_s(base) 657.xz\_s(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
| 641.leela\_s(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 648.exchange2\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_int\_base = 4.94

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Jun-2019

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

### C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

### Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-G.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-G.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-17 02:44:55-0400.  
Report generated on 2020-04-14 14:11:29 by CPU2017 PDF formatter v6255.  
Originally published on 2020-04-14.