



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Nov-2019

Software Availability: Aug-2019

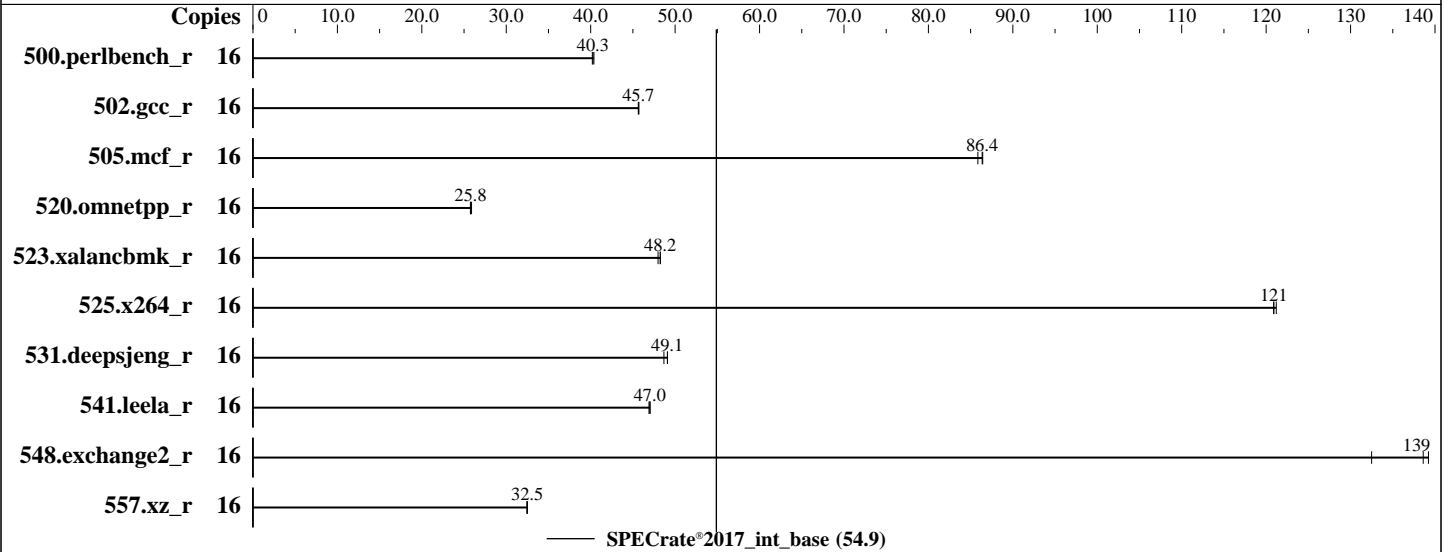

### Hardware

CPU Name: AMD EPYC 7232P  
 Max MHz: 3200  
 Nominal: 3100  
 Enabled: 8 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 32 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-L)  
 Storage: 1 x SATA HDD, 2TB, 7.2K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64) kernel version 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Fujitsu BIOS Version R07. Released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2020  
Hardware Availability: Nov-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	<b>633</b>	<b>40.3</b>	631	40.4	634	40.2							
502.gcc_r	16	496	45.7	496	45.6	<b>496</b>	<b>45.7</b>							
505.mcf_r	16	301	85.9	<b>299</b>	<b>86.4</b>	299	86.4							
520.omnetpp_r	16	<b>814</b>	<b>25.8</b>	815	25.8	811	25.9							
523.xalancbmk_r	16	350	48.2	<b>350</b>	<b>48.2</b>	352	48.0							
525.x264_r	16	231	121	232	121	<b>232</b>	<b>121</b>							
531.deepsjeng_r	16	<b>374</b>	<b>49.1</b>	377	48.7	373	49.1							
541.leela_r	16	565	46.9	<b>564</b>	<b>47.0</b>	563	47.0							
548.exchange2_r	16	316	132	301	139	<b>302</b>	<b>139</b>							
557.xz_r	16	533	32.4	<b>532</b>	<b>32.5</b>	532	32.5							

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/Benchmark/speccpu2017/amd\_rate\_aocc200\_rome\_C\_lib/64:/home/Benchmark/speccpu2017/amd\_rate\_aocc200\_rome\_C\_lib/32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fltto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS configuration:  
cTDP = 200  
Determinism Slider = Power  
Global C-state Control = Disabled  
L1 Stream HW Prefetcher = Disabled  
NUMA nodes per socket = NPS2  
Package Power Limit = 200  
SMT Control = Auto  
SVM Mode = Disabled

Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-56yp Fri Jan 24 08:36:33 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHZ

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

From /proc/cpuinfo

```
model name : AMD EPYC 7232P 8-Core Processor
 1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 4 5 8 9 12 13
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                16
On-line CPU(s) list:  0-15
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             1
NUMA node(s):         1
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7232P 8-Core Processor
Stepping:              0
CPU MHz:               3100.000
CPU max MHz:           3100.0000
CPU min MHz:           1500.0000
BogoMIPS:              6200.47
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-15
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 257512 MB
node 0 free: 256689 MB
node distances:
node    0
0:    10
```

```
From /proc/meminfo
MemTotal:      263692552 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-56yp 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

run-level 3 Feb 14 23:22

SPEC is set to: /home/Benchmark/speccpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	1.6T	15G	1.6T	1%	/home

```

From /sys/devices/virtual/dmi/id
BIOS: GIGABYTE R07 08/30/2019
Vendor: GIGABYTE
Product: R152-Z31-FJ
Product Family: Server
Serial: GJI7P5821A0005

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  8x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200
  8x Unknown Unknown

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

```

=====
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
=====

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY LX1430 M1, AMD EPYC 7232P,  
3.10 GHz

SPECrate®2017\_int\_base = 54.9

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Nov-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C2.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C2.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-23 18:36:32-0500.

Report generated on 2020-04-14 14:17:56 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.