



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2019

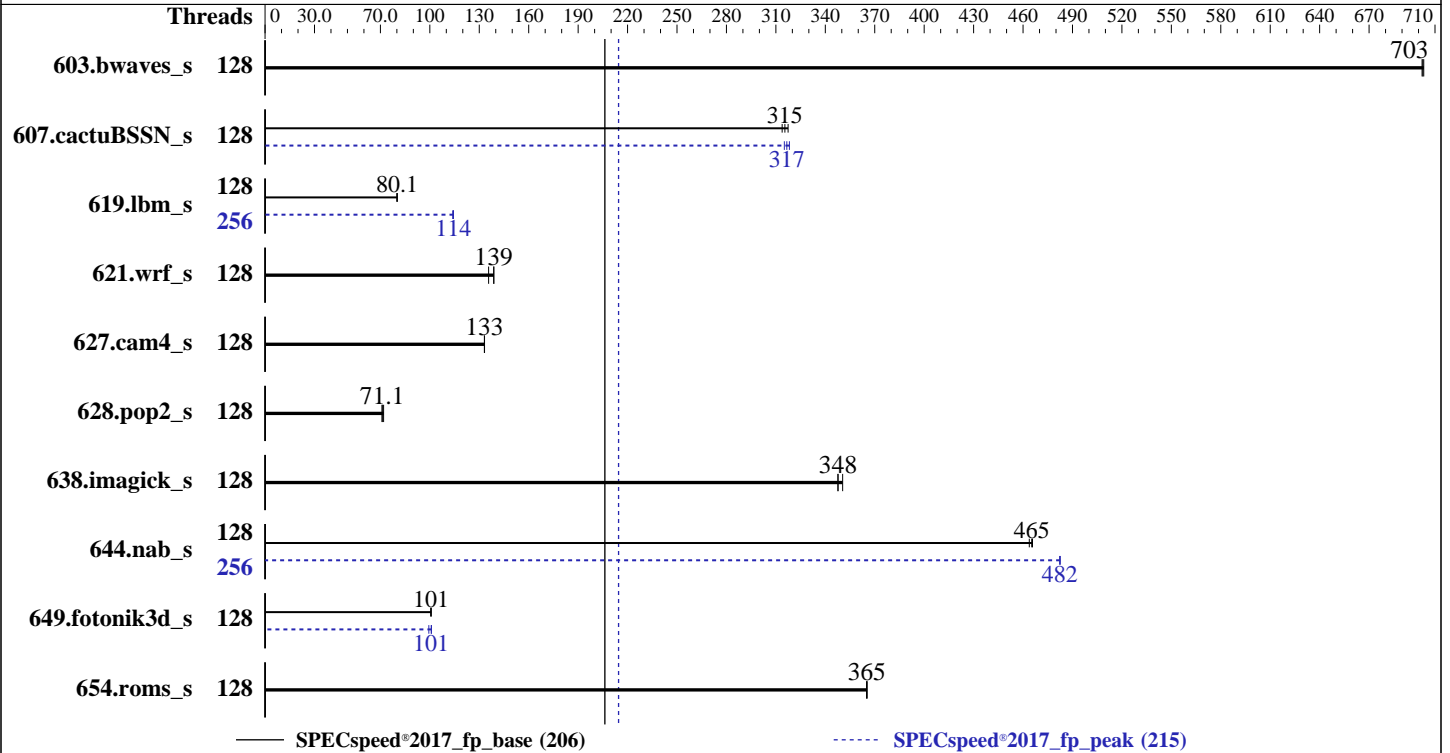

### Hardware

CPU Name: AMD EPYC 7662  
 Max MHz: 3300  
 Nominal: 2000  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP5 (x86\_64)  
 Kernel 4.12.14-120-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version D8E105P 1.00 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECSpeed®2017\_fp\_base = 206

SPECSpeed®2017\_fp\_peak = 215

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jun-2020  
Hardware Availability: Jun-2020  
Software Availability: Dec-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	<b>84.0</b>	<b>703</b>	83.9	703	84.0	702	128	<b>84.0</b>	<b>703</b>	83.9	703	84.0	702
607.cactuBSSN_s	128	<b>52.8</b>	<b>315</b>	53.1	314	52.5	317	128	<b>52.6</b>	<b>317</b>	52.9	315	52.4	318
619.lbm_s	128	<b>65.4</b>	<b>80.1</b>	65.3	80.2	65.4	80.0	256	<b>45.8</b>	<b>114</b>	46.0	114	45.8	114
621.wrf_s	128	97.5	136	<b>95.3</b>	<b>139</b>	95.3	139	128	97.5	136	<b>95.3</b>	<b>139</b>	95.3	139
627.cam4_s	128	66.5	133	66.6	133	<b>66.6</b>	<b>133</b>	128	66.5	133	66.6	133	<b>66.6</b>	<b>133</b>
628.pop2_s	128	<b>167</b>	<b>71.1</b>	165	71.9	167	71.0	128	<b>167</b>	<b>71.1</b>	165	71.9	167	71.0
638.imagick_s	128	<b>41.5</b>	<b>348</b>	41.5	348	41.2	351	128	<b>41.5</b>	<b>348</b>	41.5	348	41.2	351
644.nab_s	128	37.5	466	37.7	464	<b>37.6</b>	<b>465</b>	256	36.2	483	<b>36.2</b>	<b>482</b>	36.2	482
649.fotonik3d_s	128	90.7	101	90.4	101	<b>90.5</b>	<b>101</b>	128	<b>90.4</b>	<b>101</b>	91.7	99.4	90.3	101
654.roms_s	128	43.1	365	43.1	365	<b>43.1</b>	<b>365</b>	128	43.1	365	43.1	365	<b>43.1</b>	<b>365</b>

SPECSpeed®2017\_fp\_base = **206**

SPECSpeed®2017\_fp\_peak = **215**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_speed_aocc200_rome_C_lib/64
    ;/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_speed_aocc200_rome_C_lib/32
    :"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0 128 1 129 2 130 3 131 4 132 5 133 6 134 7 135 8 136 9
137 10 138 11 139 12 140 13 141 14 142 15 143 16 144 17 145 18 146 19
147 20 148 21 149 22 150 23 151 24 152 25 153 26 154 27 155 28 156 29
157 30 158 31 159 32 160 33 161 34 162 35 163 36 164 37 165 38 166 39
167 40 168 41 169 42 170 43 171 44 172 45 173 46 174 47 175 48 176 49
177 50 178 51 179 52 180 53 181 54 182 55 183 56 184 57 185 58 186 59
187 60 188 61 189 62 190 63 191 64 192 65 193 66 194 67 195 68 196 69
197 70 198 71 199 72 200 73 201 74 202 75 203 76 204 77 205 78 206 79
207 80 208 81 209 82 210 83 211 84 212 85 213 86 214 87 215 88 216 89
217 90 218 91 219 92 220 93 221 94 222 95 223 96 224 97 225 98 226 99
227 100 228 101 229 102 230 103 231 104 232 105 233 106 234 107 235 108
236 109 237 110 238 111 239 112 240 113 241 114 242 115 243 116 244 117
245 118 246 119 247 120 248 121 249 122 250 123 251 124 252 125 253 126
254 127 255"
```

Environment variables set by runcpu during the 644.nab\_s peak run:

```
GOMP_CPU_AFFINITY = "0 128 1 129 2 130 3 131 4 132 5 133 6 134 7 135 8 136 9
137 10 138 11 139 12 140 13 141 14 142 15 143 16 144 17 145 18 146 19
147 20 148 21 149 22 150 23 151 24 152 25 153 26 154 27 155 28 156 29
157 30 158 31 159 32 160 33 161 34 162 35 163 36 164 37 165 38 166 39
167 40 168 41 169 42 170 43 171 44 172 45 173 46 174 47 175 48 176 49
177 50 178 51 179 52 180 53 181 54 182 55 183 56 184 57 185 58 186 59
187 60 188 61 189 62 190 63 191 64 192 65 193 66 194 67 195 68 196 69
197 70 198 71 199 72 200 73 201 74 202 75 203 76 204 77 205 78 206 79
207 80 208 81 209 82 210 83 211 84 212 85 213 86 214 87 215 88 216 89
217 90 218 91 219 92 220 93 221 94 222 95 223 96 224 97 225 98 226 99
227 100 228 101 229 102 230 103 231 104 232 105 233 106 234 107 235 108
236 109 237 110 238 111 239 112 240 113 241 114 242 115 243 116 244 117
245 118 246 119 247 120 248 121 249 122 250 123 251 124 252 125 253 126
254 127 255"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Environment Variables Notes (Continued)

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS settings:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA nodes per socket set to NPS2  
SOC P-States set to P0  
Global C-state Control set to Disable

sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-d9uk Thu Jun 11 02:39:04 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7662 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59 60 61 62 63

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:    2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):         4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7662 64-Core Processor
Stepping:              0
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1500.0000
BogoMIPS:              3992.32
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-31,128-159
NUMA node1 CPU(s):    32-63,160-191
NUMA node2 CPU(s):    64-95,192-223
NUMA node3 CPU(s):    96-127,224-255
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca
```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159

node 0 size: 257841 MB

node 0 free: 257261 MB

node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191

node 1 size: 257992 MB

node 1 free: 257442 MB

node 2 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223

node 2 size: 258033 MB

node 2 free: 257582 MB

node 3 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255

node 3 size: 258031 MB

node 3 free: 257334 MB

node distances:

```
node  0  1  2  3
  0:  10  12  32  32
  1:  12  10  32  32
  2:  32  32  10  12
  3:  32  32  12  10
```

From /proc/meminfo

MemTotal: 1056664516 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 5

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

```
VERSION="12-SP5"
VERSION_ID="12.5"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP5"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp5"
```

```
uname -a:
Linux linux-d9uk 4.12.14-120-default #1 SMP Thu Nov 7 16:39:09 UTC 2019 (fd9dc36)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit:                Not affected
CVE-2018-3620 (L1 Terminal Fault):  Not affected
Microarchitectural Data Sampling:  Not affected
CVE-2017-5754 (Meltdown):         Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):  Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
tsx_async_abort:              Not affected
```

```
run-level 3 Jun 11 02:36
```

```
SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   889G   81G  808G  10% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo D8E105P-1.00 05/08/2020
Vendor:    Lenovo
Product:   ThinkSystem SR645 MB
Product Family: ThinkSystem
Serial:    1234567890
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

(End of data from sysinfo program)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

This system support 16 DIMMs per processor, total 32 DIMMs.  
32 DIMM slots installed with 32 GB DIMM for this run.

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
644.nab\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
654.roms\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

## Compiler Version Notes (Continued)

```
-----
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                 | 628.pop2_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

## Base Optimization Flags

### C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

### Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

### Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

## Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: Same as 619.lbm\_s

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

```
649.fotonik3d_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645  
2.00 GHz, AMD EPYC 7662

SPECspeed®2017\_fp\_base = 206

SPECspeed®2017\_fp\_peak = 215

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000  
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec  
-lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-10 14:39:03-0400.

Report generated on 2020-07-07 14:29:43 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-07.