



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

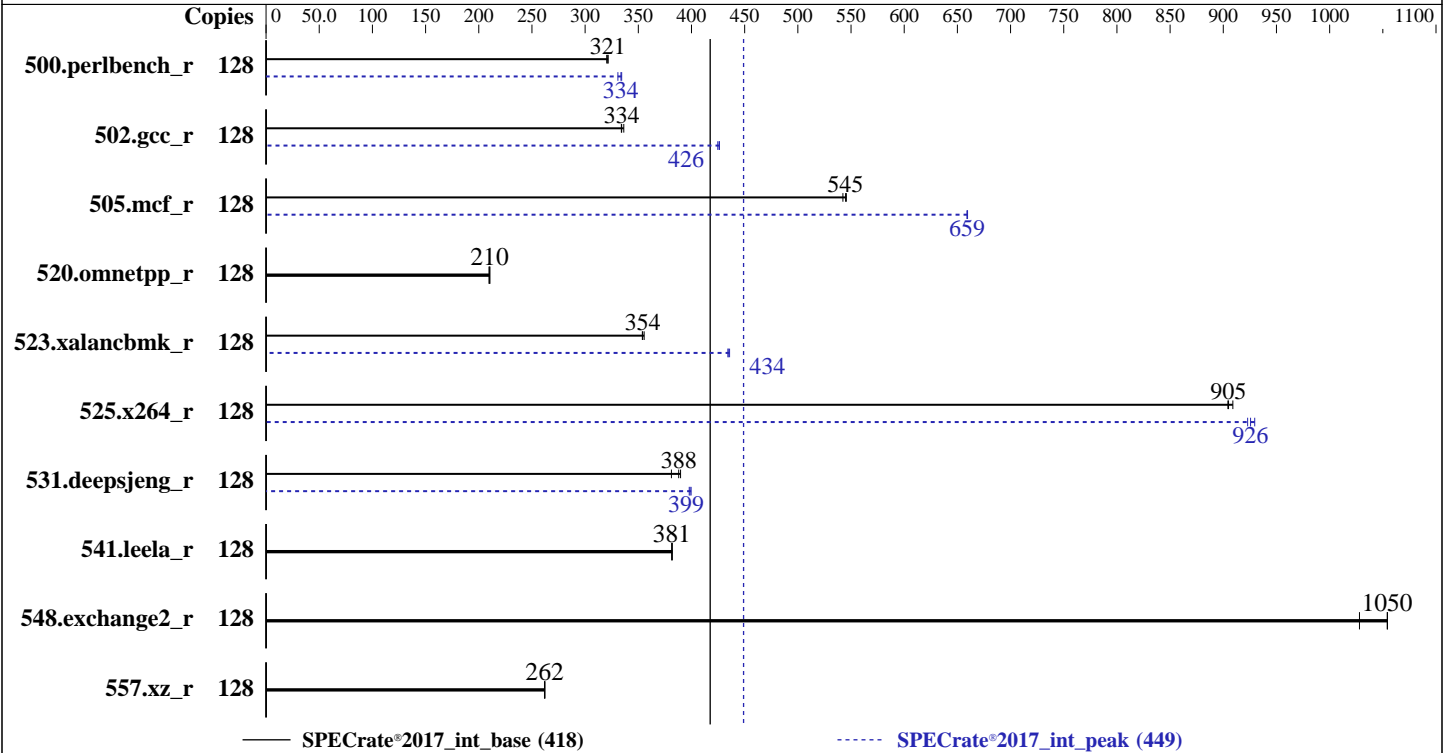

Hardware

CPU Name: AMD EPYC 7452
 Max MHz: 3350
 Nominal: 2350
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1 (Ootpa)
 Kernel 4.18.0-147.el8.x86_64
 C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version D8E105P 1.00 released May-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	634	322	634	<u>321</u>	636	320	128	609	334	611	<u>334</u>	616	331
502.gcc_r	128	543	334	539	336	542	334	128	<u>426</u>	<u>426</u>	425	426	427	425
505.mcf_r	128	380	545	379	546	381	542	128	<u>314</u>	<u>659</u>	314	659	314	660
520.omnetpp_r	128	801	210	799	<u>210</u>	798	210	128	801	210	<u>799</u>	<u>210</u>	798	210
523.xalancbmk_r	128	380	355	382	354	382	354	128	<u>311</u>	<u>434</u>	310	436	311	434
525.x264_r	128	247	909	248	905	248	904	128	<u>242</u>	<u>926</u>	243	923	241	930
531.deepsjeng_r	128	376	390	378	388	385	381	128	369	398	367	400	368	399
541.leela_r	128	556	381	556	381	555	382	128	556	381	556	381	555	382
548.exchange2_r	128	318	1050	318	1050	326	1030	128	<u>318</u>	<u>1050</u>	318	1050	326	1030
557.xz_r	128	528	262	528	262	527	262	128	<u>528</u>	<u>262</u>	528	262	527	262

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/64;  
    /home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/32:"  
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA nodes per socket set to NPS4

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Thu Jun 11 19:35:44 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7452 32-Core Processor  
    2 "physical id"s (chips)  
    128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7452 32-Core Processor
Stepping:               0
CPU MHz:                3338.318
CPU max MHz:            2350.0000
CPU min MHz:            1500.0000
BogoMIPS:               4691.23
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Platform Notes (Continued)

```
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128826 MB
node 0 free: 128574 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129019 MB
node 1 free: 128783 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 128994 MB
node 2 free: 128802 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129007 MB
node 3 free: 128820 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129019 MB
node 4 free: 128848 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129019 MB
node 5 free: 128871 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129019 MB
node 6 free: 128858 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 129019 MB
node 7 free: 128842 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      1056693080 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling

run-level 3 Jun 11 19:28

SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   838G   34G  804G   5% /home

From /sys/devices/virtual/dmi/id
BIOS:      Lenovo D8E105P-1.00 05/08/2020
Vendor:    Lenovo
Product:   ThinkSystem SR665 MB
Product Family: ThinkSystem

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

(End of data from sysinfo program)

This system support 16 DIMMs per processor, total 32 DIMMs.
32 DIMM slots installed with 32 GB DIMM for this run.

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)
=====

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)
=====

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 418

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.35 GHz, AMD EPYC 7452

SPECrate®2017_int_base = 418

SPECrate®2017_int_peak = 449

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-11 07:35:43-0400.

Report generated on 2020-07-07 14:39:21 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-07.