



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

SPECrate®2017_int_peak = 402

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

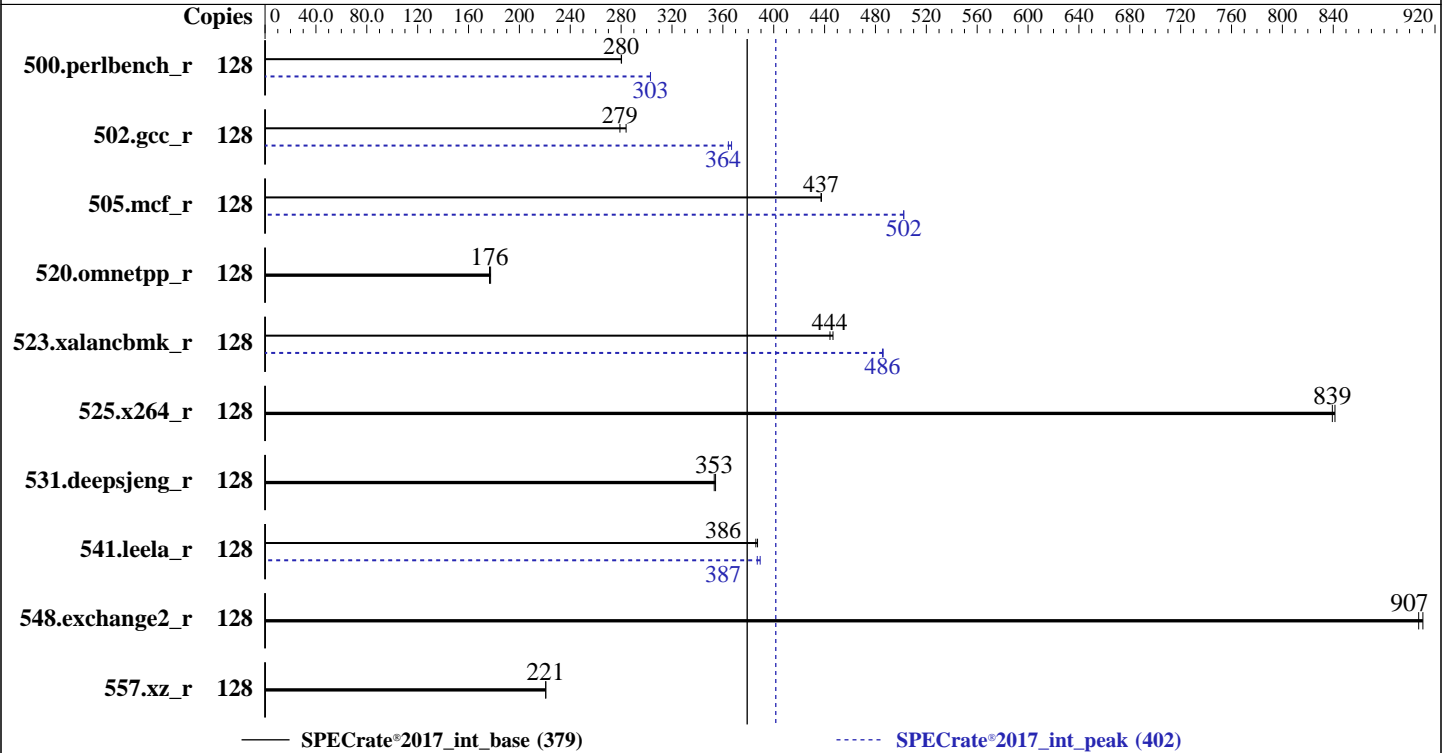

Hardware

CPU Name: AMD EPYC 7713P
 Max MHz: 3675
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 225 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
 4.18.0-240.10.1.el8_3.x86_64
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version 2.0.3 released Jan-2021
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	727	280	<u>727</u>	<u>280</u>			128	<u>672</u>	<u>303</u>	672	303		
502.gcc_r	128	638	284	<u>649</u>	<u>279</u>			128	494	367	<u>497</u>	<u>364</u>		
505.mcf_r	128	473	438	<u>473</u>	<u>437</u>			128	<u>412</u>	<u>502</u>	412	502		
520.omnetpp_r	128	<u>952</u>	<u>176</u>	947	177			128	<u>952</u>	<u>176</u>	947	177		
523.xalancbmk_r	128	303	447	<u>304</u>	<u>444</u>			128	<u>278</u>	<u>486</u>	278	486		
525.x264_r	128	266	841	<u>267</u>	<u>839</u>			128	266	841	<u>267</u>	<u>839</u>		
531.deepsjeng_r	128	414	354	<u>415</u>	<u>353</u>			128	414	354	<u>415</u>	<u>353</u>		
541.leela_r	128	547	387	<u>549</u>	<u>386</u>			128	544	389	<u>548</u>	<u>387</u>		
548.exchange2_r	128	368	910	<u>370</u>	<u>907</u>			128	368	910	<u>370</u>	<u>907</u>		
557.xz_r	128	<u>626</u>	<u>221</u>	626	221			128	<u>626</u>	<u>221</u>	626	221		

SPECrate®2017_int_base = 379

SPECrate®2017_int_peak = 402

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Operating System Notes (Continued)

randomization (ASLR) to reduce run-to-run variability.

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak  
integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base  
integer runs to enable THP only on request.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.5/amd_rate_aocc300_milan_A_lib/64:/mnt/ramdisk  
    /cpu2017-1.1.5/amd_rate_aocc300_milan_A_lib/32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

```
jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
NUMA Nodes per Socket      : 4  
L3 Cache as NUMA Domain    : Enabled  
Virtualization Technology  : Disabled
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

DRAM Refresh Delay : Performance
 System Profile : Custom
 CPU Power Management : Maximum Performance
 Memory Patrol Scrub : Disabled
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.5/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on localhost.localdomain Tue Apr 20 11:47:28 2021

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : AMD EPYC 7713P 64-Core Processor
 1 "physical id"s (chips)
 128 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 64
 siblings : 128
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
 53 54 55 56 57 58 59 60 61 62 63

From lscpu:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian
 CPU(s): 128
 On-line CPU(s) list: 0-127
 Thread(s) per core: 2
 Core(s) per socket: 64
 Socket(s): 1
 NUMA node(s): 8
 Vendor ID: AuthenticAMD
 CPU family: 25
 Model: 1
 Model name: AMD EPYC 7713P 64-Core Processor
 Stepping: 1
 CPU MHz: 1831.403
 BogoMIPS: 3992.55
 Virtualization: AMD-V
 L1d cache: 32K
 L1i cache: 32K

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

L2 cache:          512K
L3 cache:          32768K
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128504 MB
node 0 free: 128383 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 128910 MB
node 1 free: 128819 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 128918 MB
node 2 free: 128844 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 128906 MB
node 3 free: 128909 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 128920 MB
node 4 free: 128772 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 128884 MB
node 5 free: 128756 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 128910 MB
node 6 free: 123999 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 128914 MB
node 7 free: 128886 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  11  12  12  12  12  12  12
 1:  11  10  12  12  12  12  12  12
 2:  12  12  10  11  12  12  12  12
 3:  12  12  11  10  12  12  12  12
 4:  12  12  12  12  10  11  12  12
 5:  12  12  12  12  11  10  12  12
 6:  12  12  12  12  12  12  10  11
 7:  12  12  12  12  12  12  11  10

```

From /proc/meminfo

MemTotal: 1056428764 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.3"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.10.1.el8_3.x86_64 #1 SMP Wed Dec 16 03:30:52

EST 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 20 06:38 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	225G	4.7G	221G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
Vendor:      Dell Inc.
Product:     PowerEdge R7525
Product Family: PowerEdge
Serial:      48LN333
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
24x Not Specified Not Specified
```

BIOS:

```
BIOS Vendor:      Dell Inc.
BIOS Version:     2.0.3
BIOS Date:        01/15/2021
BIOS Revision:    2.0
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

```

-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----

```

```

-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
C          | 502.gcc_r(peak)
-----

```

```

-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----

```

```

-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
C++       | 523.xalancbmk_r(peak)
-----

```

```

-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

SPECrate®2017_int_peak = 402

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_int_peak = 402

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

SPECrate®2017_int_peak = 402

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 379

SPECrate®2017_int_peak = 402

PowerEdge R7525 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

541.leela_r (continued):

-lamdlibm -ljemalloc

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-20 12:47:28-0400.

Report generated on 2021-07-07 17:46:40 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-07.