



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2021  
Hardware Availability: Mar-2021  
Software Availability: May-2021

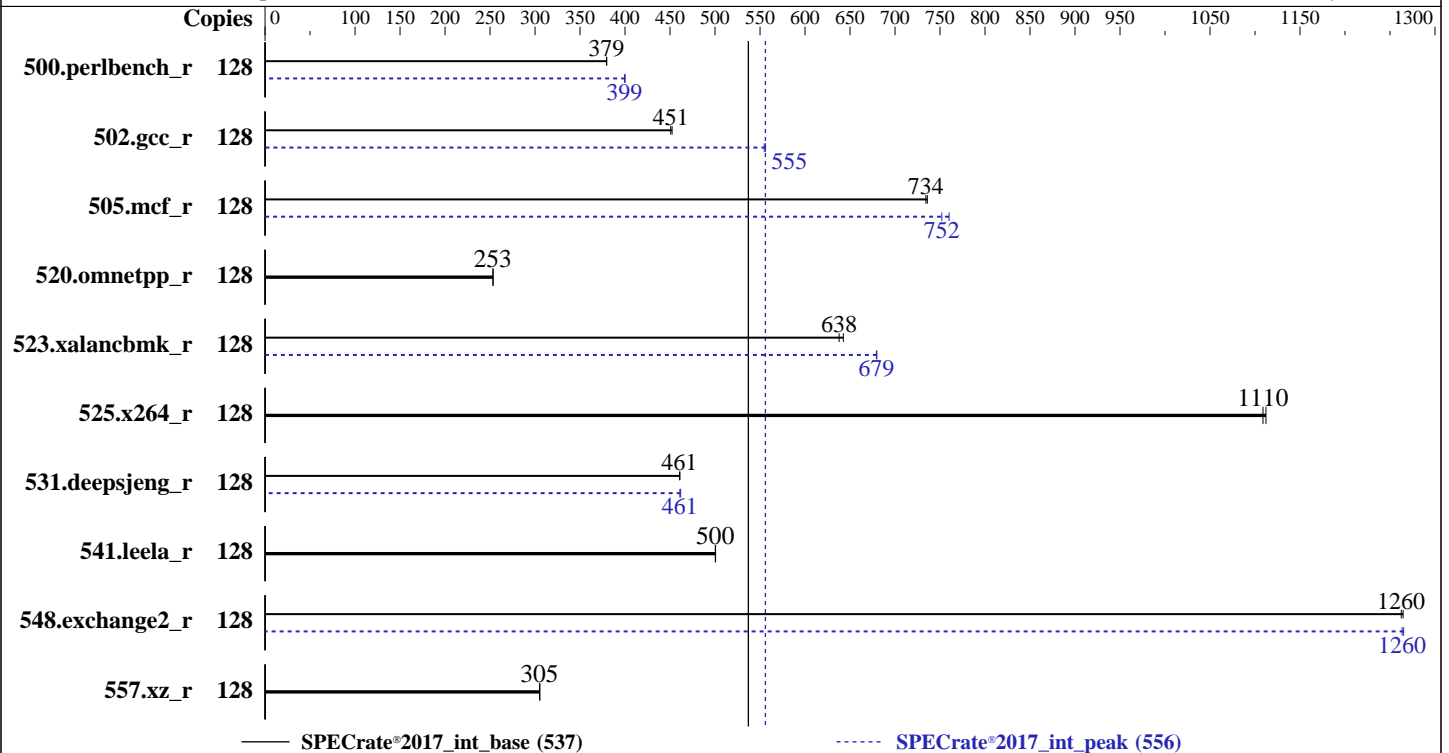

### Hardware

CPU Name: AMD EPYC 7543  
Max MHz: 3700  
Nominal: 2800  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.4  
Kernel 4.18.0-305.el8.x86\_64  
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
Parallel: No  
Firmware: Version 2.3 released Oct-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library v5.1.0  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2021  
Hardware Availability: Mar-2021  
Software Availability: May-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>537</b>	<b>379</b>	537	380			128	509	400	<b>510</b>	<b>399</b>		
502.gcc_r	128	401	452	<b>402</b>	<b>451</b>			128	<b>327</b>	<b>555</b>	326	556		
505.mcf_r	128	<b>282</b>	<b>734</b>	281	736			128	272	760	<b>275</b>	<b>752</b>		
520.omnetpp_r	128	663	253	<b>663</b>	<b>253</b>			128	663	253	<b>663</b>	<b>253</b>		
523.xalancbmk_r	128	210	643	<b>212</b>	<b>638</b>			128	<b>199</b>	<b>679</b>	199	680		
525.x264_r	128	<b>202</b>	<b>1110</b>	202	1110			128	<b>202</b>	<b>1110</b>	202	1110		
531.deepsjeng_r	128	<b>319</b>	<b>461</b>	318	461			128	<b>318</b>	<b>461</b>	318	462		
541.leela_r	128	<b>424</b>	<b>500</b>	423	501			128	<b>424</b>	<b>500</b>	423	501		
548.exchange2_r	128	<b>266</b>	<b>1260</b>	265	1260			128	<b>265</b>	<b>1260</b>	265	1270		
557.xz_r	128	453	305	<b>453</b>	<b>305</b>			128	453	305	<b>453</b>	<b>305</b>		

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_rate\_aocc300\_milan\_B\_lib/lib;/home/cpu2017/amd\_rate\_a  
occ300\_milan\_B\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Settings:  
Determinism Control = Manual  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 240  
Package Power Limit Control = Manual  
Package Power Limit = 240

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

APBDIS = 1  
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on H12DSU-7543 Sat Oct 30 05:47:23 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7543 32-Core Processor  
2 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32  
siblings : 64  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 32  
Socket(s): 2  
NUMA node(s): 16  
Vendor ID: AuthenticAMD  
BIOS Vendor ID: Advanced Micro Devices, Inc.  
CPU family: 25  
Model: 1  
Model name: AMD EPYC 7543 32-Core Processor  
BIOS Model name: AMD EPYC 7543 32-Core Processor  
Stepping: 1  
CPU MHz: 2135.521  
CPU max MHz: 2800.0000  
CPU min MHz: 1500.0000  
BogoMIPS: 5600.16  
Virtualization: AMD-V  
L1d cache: 32K

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           512K
L3 cache:           32768K
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
sev_es fsgsbase bmlil avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt
clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 32062 MB
node 0 free: 31921 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 32252 MB
node 1 free: 32148 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 32254 MB
node 2 free: 32159 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

```

node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 32253 MB
node 3 free: 32163 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 32254 MB
node 4 free: 32160 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 32253 MB
node 5 free: 32154 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 32216 MB
node 6 free: 32120 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 32241 MB
node 7 free: 32094 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 32254 MB
node 8 free: 32155 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 32253 MB
node 9 free: 32155 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 32254 MB
node 10 free: 32163 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 32253 MB
node 11 free: 32152 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 32254 MB
node 12 free: 32159 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 32253 MB
node 13 free: 32162 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 32254 MB
node 14 free: 32137 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 32252 MB
node 15 free: 32018 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 528195564 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"  
VERSION="8.4 (Ootpa)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="8.4"  
PLATFORM\_ID="platform:el8"  
PRETTY\_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"  
ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.4:ga

uname -a:

Linux H12DSU-7543 4.18.0-305.el8.x86\_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Platform Notes (Continued)

```

Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Oct 30 01:47

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   184G  19G  166G  10% /

From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Serial:          0123456789

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
  16x SK Hynix HMAA4GR7AJR8N-XN 32 GB 2 rank 3200

BIOS:
  BIOS Vendor:    American Megatrends Inc.
  BIOS Version:   2.3
  BIOS Date:      10/12/2021
  BIOS Revision:  5.22

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
C      | 502.gcc_r(peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

### Compiler Version Notes (Continued)

| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIB -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIB -mllvm -enable-partial-unswitch  
-mllvm -unroll-threshold=100 -finline-aggressive  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

```
531.deepsjeng_r: -m64 -std=c++98
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 1024US-TRT  
(H12DSU-iN , AMD EPYC 7543)

SPECrate®2017\_int\_base = 537

SPECrate®2017\_int\_peak = 556

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** May-2021

## Peak Optimization Flags (Continued)

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument  
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument  
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-29 17:47:23-0400.

Report generated on 2021-11-24 11:19:04 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-23.