



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

### H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066


Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jan-2021

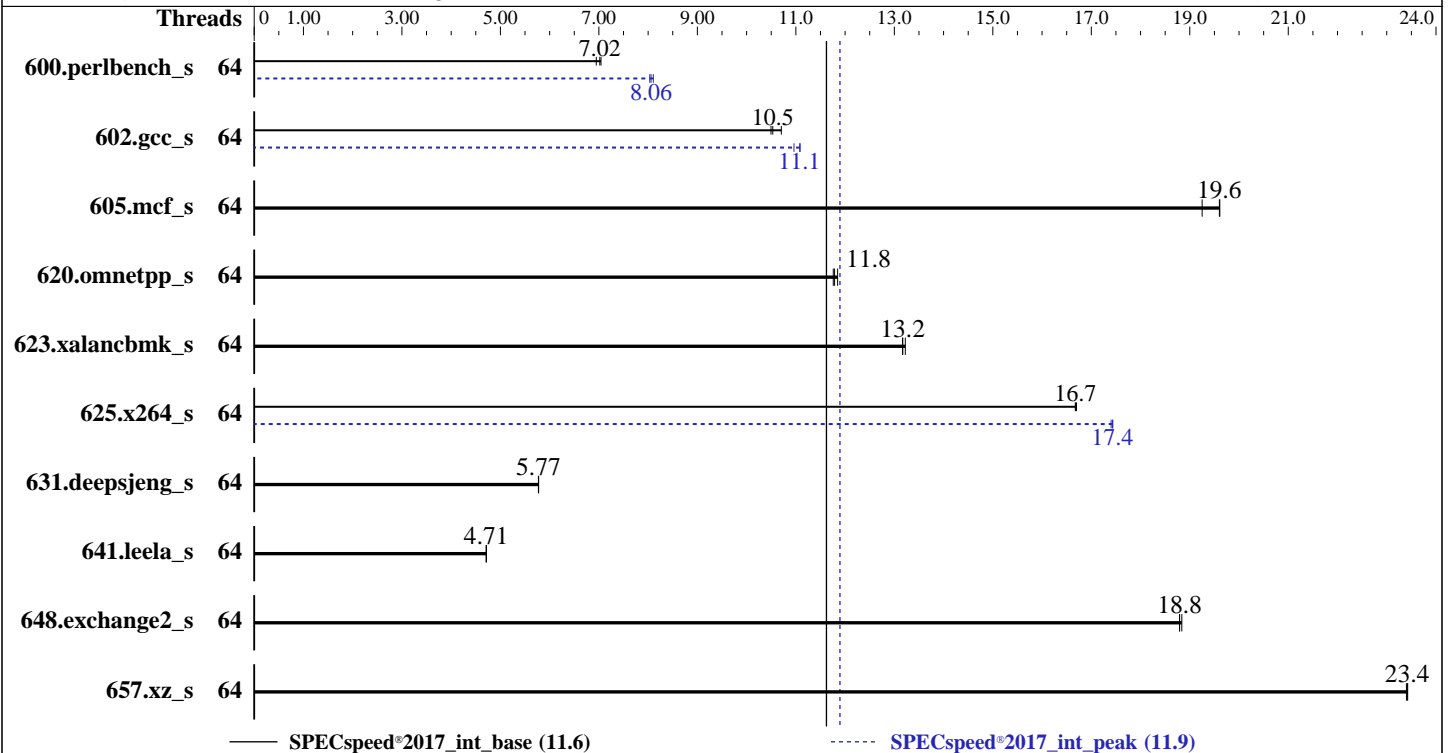

### Hardware

CPU Name: Intel Xeon Platinum 8352Y  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200V-R)  
 Storage: 1 x 480GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: Yes  
 Firmware: Version 5.34 released Sep-2021 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	256	6.95	252	7.04	<b><u>253</u></b>	<b><u>7.02</u></b>	64	<b><u>220</u></b>	<b><u>8.06</u></b>	221	8.03	219	8.11
602.gcc_s	64	<b><u>378</u></b>	<b><u>10.5</u></b>	379	10.5	372	10.7	64	359	11.1	363	11.0	<b><u>359</u></b>	<b><u>11.1</u></b>
605.mcf_s	64	<b><u>241</u></b>	<b><u>19.6</u></b>	245	19.3	241	19.6	64	<b><u>241</u></b>	<b><u>19.6</u></b>	245	19.3	241	19.6
620.omnetpp_s	64	138	11.8	<b><u>138</u></b>	<b><u>11.8</u></b>	139	11.8	64	138	11.8	<b><u>138</u></b>	<b><u>11.8</u></b>	139	11.8
623.xalancbmk_s	64	108	13.2	<b><u>108</u></b>	<b><u>13.2</u></b>	107	13.2	64	108	13.2	<b><u>108</u></b>	<b><u>13.2</u></b>	107	13.2
625.x264_s	64	106	16.7	106	16.7	<b><u>106</u></b>	<b><u>16.7</u></b>	64	101	17.4	<b><u>101</u></b>	<b><u>17.4</u></b>	101	17.4
631.deepsjeng_s	64	248	5.77	248	5.78	<b><u>248</u></b>	<b><u>5.77</u></b>	64	248	5.77	248	5.78	<b><u>248</u></b>	<b><u>5.77</u></b>
641.leela_s	64	362	4.71	<b><u>362</u></b>	<b><u>4.71</u></b>	362	4.72	64	362	4.71	<b><u>362</u></b>	<b><u>4.71</u></b>	362	4.72
648.exchange2_s	64	156	18.8	156	18.8	<b><u>156</u></b>	<b><u>18.8</u></b>	64	156	18.8	156	18.8	<b><u>156</u></b>	<b><u>18.8</u></b>
657.xz_s	64	264	23.4	264	23.4	<b><u>264</u></b>	<b><u>23.4</u></b>	64	264	23.4	264	23.4	<b><u>264</u></b>	<b><u>23.4</u></b>

SPECspeed®2017\_int\_base = **11.6**

SPECspeed®2017\_int\_peak = **11.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

```
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## General Notes (Continued)

sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Set Hyper-Threading to Disabled  
Set Energy Performance BIAS to Performance  
Set Patrol Scrub to Disabled

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Tue Nov 9 07:05:15 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 32
  siblings     : 32
 physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31
 physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31
```

From lscpu from util-linux 2.32.1:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          64
On-line CPU(s) list: 0-63
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s):       2
NUMA node(s):   2
Vendor ID:       GenuineIntel
CPU family:      6
Model:           106
Model name:      Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
Stepping:        6
CPU MHz:         800.000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Platform Notes (Continued)

CPU max MHz: 3400.0000  
 CPU min MHz: 800.0000  
 BogomIPS: 4400.00  
 Virtualization: VT-x  
 L1d cache: 48K  
 L1i cache: 32K  
 L2 cache: 1280K  
 L3 cache: 49152K  
 NUMA node0 CPU(s): 0-31  
 NUMA node1 CPU(s): 32-63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
 pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
 lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid  
 aperfmperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave  
 avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 invpcid\_single ssbd  
 mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase  
 tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt\_a avx512f avx512dq  
 rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw  
 avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
 cqm\_mbm\_local wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp  
 hwp\_pkg\_req avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni  
 avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_l1d  
 arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 49152 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
```

node 0 size: 257347 MB

node 0 free: 256932 MB

```
node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
```

node 1 size: 258038 MB

node 1 free: 257104 MB

node distances:

```
node 0 1
0: 10 20
1: 20 10
```

From /proc/meminfo

MemTotal: 527755544 kB

HugePages\_Total: 0

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Platform Notes (Continued)

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.2"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86\_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

No status reported

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	31G	361G	8%	/home

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

Vendor: H3C  
Product: RS33M2C9S  
Product Family: Rack

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200  
16x NO DIMM NO DIMM

BIOS:  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 5.34  
BIOS Date: 09/11/2021  
BIOS Revision: 5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 600.perlbench\_s(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)  
625.x264\_s(base, peak) 657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 600.perlbench\_s(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

## Base Portability Flags (Continued)

```
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench\_s: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Nov-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Jan-2021

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 11.6

H3C UniServer R4900 G5 (Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = 11.9

**CPU2017 License:** 9066

**Test Date:** Nov-2021

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Hardware Availability:** Sep-2020

**Tested by:** New H3C Technologies Co., Ltd.

**Software Availability:** Jan-2021

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-CPX-RevD.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-CPX-RevD.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-09 07:05:14-0500.

Report generated on 2021-12-07 16:57:26 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-07.