



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

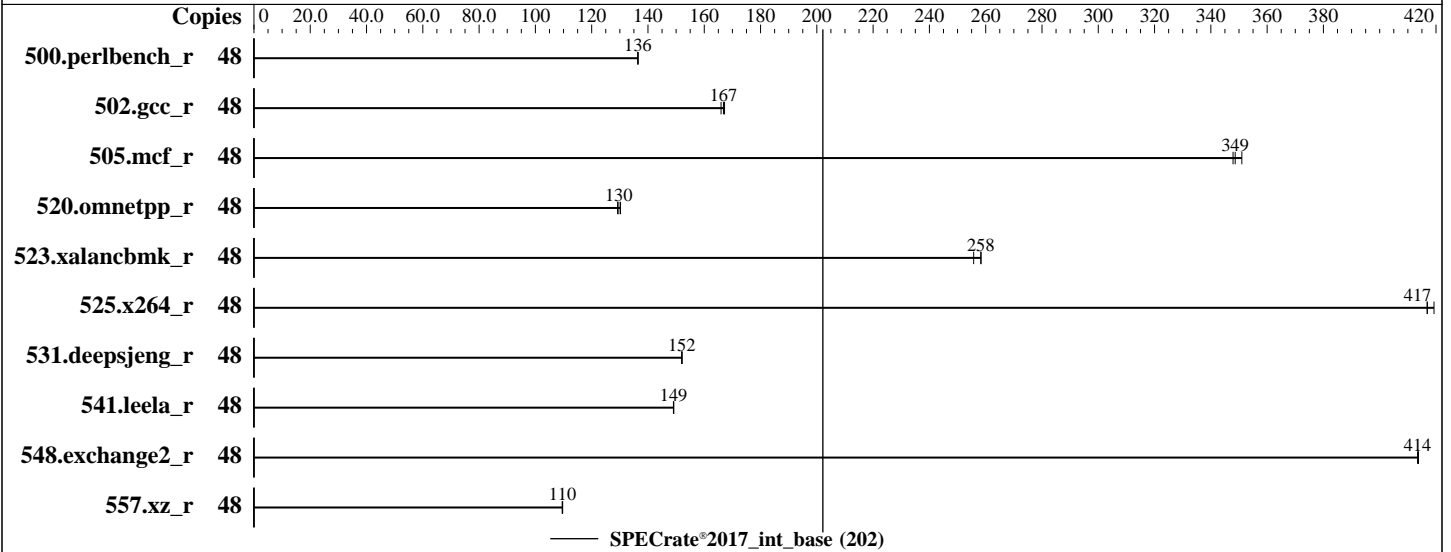

Hardware

CPU Name: Intel Xeon Gold 5317
 Max MHz: 3600
 Nominal: 3000
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 18 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x 600GB 10000RPM SAS HDD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 Parallel: No
 Firmware: Version 5.39 released Nov-2021 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	48	560	136	560	136	560	136									
502.gcc_r	48	406	167	407	167	410	166									
505.mcf_r	48	222	349	221	351	223	348									
520.omnetpp_r	48	486	130	487	129	484	130									
523.xalancbmk_r	48	198	256	196	258	196	258									
525.x264_r	48	200	419	202	417	202	417									
531.deepsjeng_r	48	362	152	362	152	362	152									
541.leela_r	48	533	149	533	149	533	149									
548.exchange2_r	48	304	414	304	413	304	414									
557.xz_r	48	473	110	473	110	473	110									

SPECrate®2017_int_base = 202

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS Settings:

Set SNC (Sub NUMA) to Enabled

Set Power Performance Tuning to BIOS Controls EPB

Set Energy Performance BIAS to Performance

Set XPT Prefetch to Enabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Mon Dec 13 20:33:40 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
```

```
2 "physical id"s (chips)
```

```
48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
```

```
siblings : 24
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11
```

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              106
Model name:         Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
Stepping:           6
CPU MHz:            3400.000
CPU max MHz:        3600.0000
CPU min MHz:        800.0000
BogoMIPS:           6000.00
Virtualization:     VT-x
L1d cache:          48K
L1i cache:          32K
L2 cache:           1280K
L3 cache:           18432K
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512v1 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 18432 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 128197 MB
node 0 free: 127072 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 129021 MB
node 1 free: 128763 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 129021 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Platform Notes (Continued)

```

node 2 free: 128871 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 128991 MB
node 3 free: 128822 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

```

```

From /proc/meminfo
MemTotal:      527596096 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp
Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Dec 13 20:22

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	504G	146G	358G	29%	/home

From /sys/devices/virtual/dmi/id
Product Family: Rack

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200, configured at 2933
16x NO DIMM NO DIMM

BIOS:

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 5.39
BIOS Date: 11/17/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
         | 541.leela_r(base)
=====

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran | 548.exchange2_r(base)
=====

```

```

-----
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 202

H3C UniServer R4300 G5 (Intel Xeon Gold 5317)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-13 07:33:39-0500.

Report generated on 2022-01-10 11:01:49 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-07.