



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

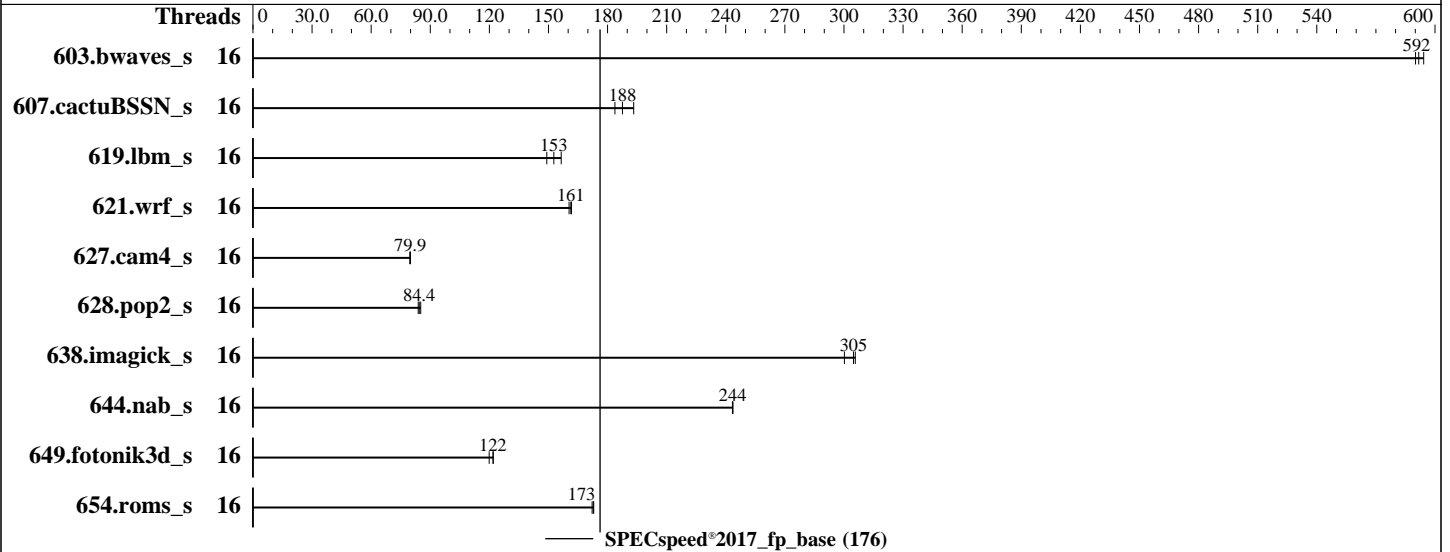

Hardware

CPU Name: Intel Xeon Gold 6434H
 Max MHz: 4100
 Nominal: 3700
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler Classic for Linux;
 C/C++: Version 2023.0 of Intel C/C++ Compiler Classic for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version ESE109L 1.10 released Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	99.3	594	100	590	<u>99.7</u>	<u>592</u>							
607.cactuBSSN_s	16	<u>88.9</u>	<u>188</u>	90.7	184	86.3	193							
619.lbm_s	16	33.5	156	<u>34.3</u>	<u>153</u>	35.1	149							
621.wrf_s	16	<u>82.0</u>	<u>161</u>	81.8	162	82.4	160							
627.cam4_s	16	111	79.6	111	79.9	<u>111</u>	<u>79.9</u>							
628.pop2_s	16	<u>141</u>	<u>84.4</u>	139	85.2	142	83.9							
638.imagick_s	16	<u>47.3</u>	<u>305</u>	47.2	306	48.1	300							
644.nab_s	16	71.7	244	71.8	243	<u>71.7</u>	<u>244</u>							
649.fotonik3d_s	16	74.7	122	76.0	120	<u>74.8</u>	<u>122</u>							
654.roms_s	16	91.5	172	91.0	173	<u>91.1</u>	<u>173</u>							

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/j
e5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
Hyper-Threading set to Disabled
C-state set to Legacy

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on test1 Tue Feb 7 16:46:34 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux
```

2. w

```
16:46:34 up 35 min, 1 user, load average: 0.34, 6.28, 6.99
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    -             16:11      6.00s      0.76s     0.00s    -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062726
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 2062726
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=16 --tune base -o all --define drop_caches
fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=16 --tune base --output_format all --define
drop_caches --nopower --runmode speed --tune base --size refspped fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.012/templogs/preenv.fpspeed.012.0.log --lognum 012.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```

6. /proc/cpuinfo
   model name       : Intel(R) Xeon(R) Gold 6434H
   vendor_id        : GenuineIntel
   cpu family        : 6
   model            : 143
   stepping          : 8
   microcode         : 0x2b000161
   bugs              : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores         : 8
   siblings          : 8
   2 physical ids (chips)
   16 processors (hardware threads)
   physical id 0:   : core ids 0-7
   physical id 1:   : core ids 0-7
   physical id 0:   : apicids 0,2,4,6,8,10,12,14
   physical id 1:   : apicids 128,130,132,134,136,138,140,142

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6434H
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    8
Socket(s):             2
Stepping:              8
BogoMIPS:              7400.00

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault ept cat_l3 cat_l2 cdp_l3

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

Virtualization: VT-x

L1d cache: 768 KiB (16 instances)

L1i cache: 512 KiB (16 instances)

L2 cache: 32 MiB (16 instances)

L3 cache: 45 MiB (2 instances)

NUMA node(s): 2

NUMA node0 CPU(s): 0-7

NUMA node1 CPU(s): 8-15

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-7

node 0 size: 257709 MB

node 0 free: 256646 MB

node 1 cpus: 8-15

node 1 size: 257995 MB

node 1 free: 256969 MB

node distances:

node 0 1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

0: 10 21
1: 21 10

9. /proc/meminfo
MemTotal: 528082452 kB

10. who -r
run-level 3 Feb 7 16:11

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc rpcbnd rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f976c541-a329-4c54-ba84-4be16556ee18
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Supported: yes
Active: yes

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

19. Disk information

```

SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sdb2       xfs   894G   92G  803G  11% /

```

20. /sys/devices/virtual/dmi/id

```

Vendor:           Lenovo
Product:          ThinkSystem SR630 V3
Product Family:  ThinkSystem
Serial:           1234567890

```

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  1x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
  5x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
  10x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      Lenovo
BIOS Version:     ESE109L-1.10
BIOS Date:        01/07/2023
BIOS Revision:    1.10
Firmware Revision: 1.0

```

Compiler Version Notes

```

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 176

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017_fp_base = 176

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-07 03:46:34-0500.

Report generated on 2023-03-02 11:26:39 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.