



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

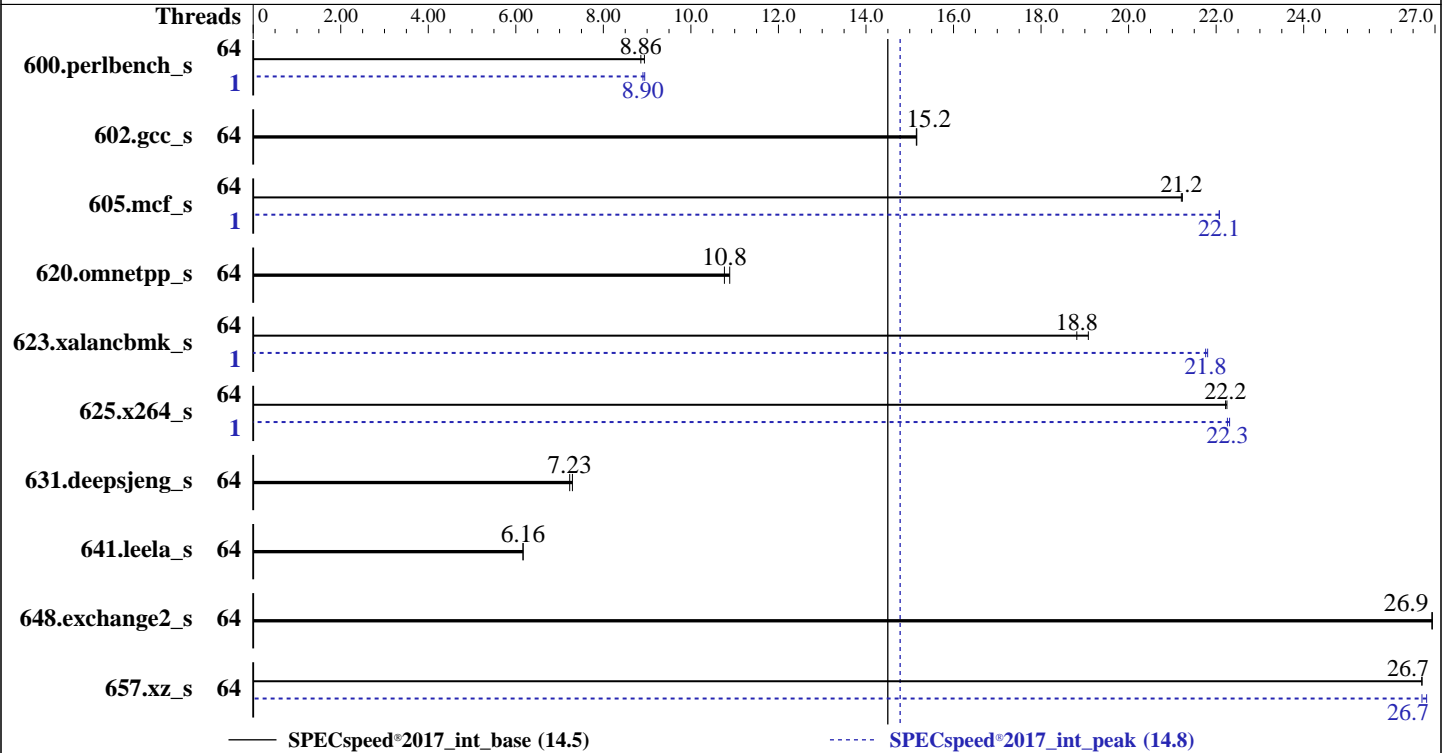

Hardware

CPU Name: AMD EPYC 9334
 Max MHz: 3900
 Nominal: 2700
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 60 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 5.15.0-86-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.4.6 released Jul-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	199	8.94	<u>200</u>	<u>8.86</u>			1	<u>199</u>	<u>8.90</u>	198	8.94		
602.gcc_s	64	263	15.2	<u>263</u>	<u>15.2</u>			64	263	15.2	<u>263</u>	<u>15.2</u>		
605.mcf_s	64	222	21.2	<u>223</u>	<u>21.2</u>			1	214	22.1	<u>214</u>	<u>22.1</u>		
620.omnetpp_s	64	150	10.9	<u>151</u>	<u>10.8</u>			64	150	10.9	<u>151</u>	<u>10.8</u>		
623.xalancbmk_s	64	74.3	19.1	<u>75.3</u>	<u>18.8</u>			1	<u>65.1</u>	<u>21.8</u>	65.0	21.8		
625.x264_s	64	79.3	22.2	<u>79.4</u>	<u>22.2</u>			1	79.1	22.3	<u>79.3</u>	<u>22.3</u>		
631.deepsjeng_s	64	196	7.29	<u>198</u>	<u>7.23</u>			64	196	7.29	<u>198</u>	<u>7.23</u>		
641.leela_s	64	<u>277</u>	<u>6.16</u>	277	6.17			64	<u>277</u>	<u>6.16</u>	277	6.17		
648.exchange2_s	64	109	26.9	<u>109</u>	<u>26.9</u>			64	109	26.9	<u>109</u>	<u>26.9</u>		
657.xz_s	64	231	26.7	<u>232</u>	<u>26.7</u>			64	<u>232</u>	<u>26.7</u>	231	26.8		

SPECspeed®2017_int_base = **14.5**

SPECspeed®2017_int_peak = **14.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
```

```
    Logical Processor : Disabled
    Virtualization Technology : Disabled
    NUMA Nodes per Socket : 4
    L3 cache as NUMA Domain : Enabled
```

```
    System Profile : Custom
    C-States : Disabled
    Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

Power Management : Disabled
Determinism Slider : Power Determinism
Algorithm Performance
Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Thu Oct 12 14:08:41 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux amd-spa 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
14:08:41 up 1 min, 1 user, load average: 0.15, 0.04, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 26Nov61 33.00s 1.71s 0.31s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Platform Notes (Continued)

```

memory(kbytes)          unlimited
locked memory(kbytes)  2097152
process                 3093876
nofiles                 1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                  0

```

5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8
--output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8
--output_format html,pdf,txt intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8
--output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9334 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srsro
TLB size       : 3584 4K pages
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55
physical id 1: core ids 0-7,16-23,32-39,48-55
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: Feb-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9334 32-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3910.2529
CPU min MHz: 1500.0000
BogoMIPS: 5401.72
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V
Virtualization:
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaggs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling, PBRBS-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7
node 0 size: 96311 MB
node 0 free: 95970 MB
node 1 cpus: 8-15
node 1 size: 96765 MB
node 1 free: 96465 MB
node 2 cpus: 16-23
node 2 size: 96765 MB
node 2 free: 96490 MB
node 3 cpus: 24-31
node 3 size: 96749 MB
node 3 free: 96471 MB
node 4 cpus: 32-39
node 4 size: 96717 MB
node 4 free: 92879 MB
node 5 cpus: 40-47
node 5 size: 96765 MB
node 5 free: 96553 MB
node 6 cpus: 48-55
node 6 size: 96765 MB
node 6 free: 96541 MB
node 7 cpus: 56-63
node 7 size: 96741 MB
node 7 free: 96460 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 792147948 kB

10. who -r

run-level 5 Nov 26 16:22

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

Default	Target	Status
graphical	running	

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Platform Notes (Continued)

12. Services, from `systemctl list-unit-files`

```

STATE          UNIT FILES
enabled        ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
               getty@ grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
               lxd-agent multipathd pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd
               systemd-pstore systemd-resolved systemd-timesyncd thermald tuned udisks2
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled       console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
               systemd-boot-check-no-failures systemd-network-generator systemd-sysext
               systemd-time-wait-sync upower

generated      apport
indirect       uidd
masked         cryptdisks cryptdisks-early gpu-manager hwclock lvm2 multipath-tools-boot
               networkd-dispatcher open-vm-tools rc rcS screen-cleanup sudo systemd-networkd-wait-online
               ua-reboot-cmds ubuntu-advantage ufw vgauth vmttoolsd x11-common

```

13. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=/vmlinuz-5.15.0-86-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

```

14. `cpupower frequency-info`

```

analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 3
  Pstate-P0: 2700MHz

```

15. `tuned-adm active`

Current active profile: latency-performance

16. `sysctl`

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS
-----
```

```
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs      tmpfs 60G 3.4G 57G 6% /mnt/ramdisk
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R7625
Product Family: PowerEdge
Serial:      1234567
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x 802C0000802C MTC20F2085S1RC48BA1 32 GB 2 rank 4800
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.4.6
BIOS Date:        07/06/2023
BIOS Revision:    1.4
-----
```

Compiler Version Notes

```
-----
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Compiler Version Notes (Continued)

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

```

```

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

```

```

Fortran | 648.exchange2_s(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

602.gcc_s: basepeak = yes

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.5

PowerEdge R7625 (AMD EPYC 9334 32-Core Processor)

SPECspeed®2017_int_peak = 14.8

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: Feb-2023

Software Availability: Oct-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-12 10:08:40-0400.
Report generated on 2024-01-03 17:38:51 by CPU2017 PDF formatter v6716.
Originally published on 2024-01-02.