



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

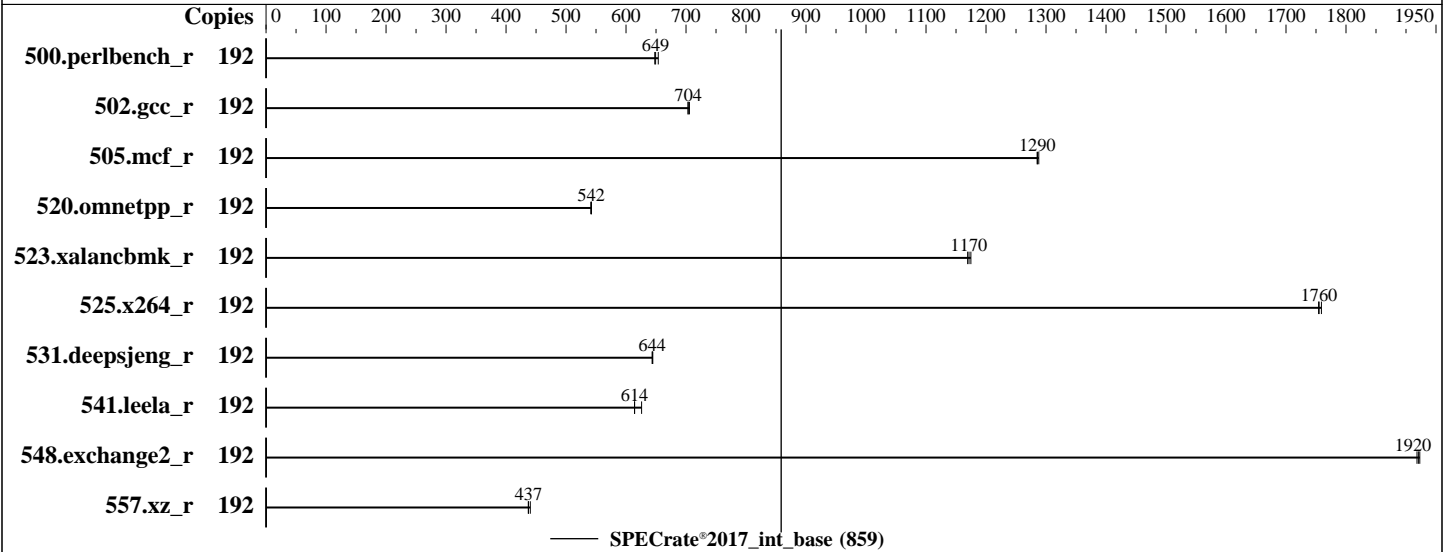

Hardware

CPU Name: Intel Xeon Platinum 8558P
 Max MHz: 4000
 Nominal: 2700
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 260 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 Kernel 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version ESE121V 3.10 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 859

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	468	654	<u>471</u>	<u>649</u>	472	648							
502.gcc_r	192	385	706	387	703	<u>386</u>	<u>704</u>							
505.mcf_r	192	241	1290	241	1290	<u>241</u>	<u>1290</u>							
520.omnetpp_r	192	465	542	465	541	<u>465</u>	<u>542</u>							
523.xalancbmk_r	192	173	1170	173	1170	<u>173</u>	<u>1170</u>							
525.x264_r	192	191	1760	<u>192</u>	<u>1760</u>	192	1750							
531.deepsjeng_r	192	341	645	<u>342</u>	<u>644</u>	342	644							
541.leela_r	192	<u>518</u>	<u>614</u>	518	614	508	626							
548.exchange2_r	192	262	1920	262	1920	<u>262</u>	<u>1920</u>							
557.xz_r	192	471	440	<u>474</u>	<u>437</u>	474	437							

SPECrate®2017_int_base = 859

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

UPI Link Disable set to Minimum Number of Links Enabled

SNC set to SNC2

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Mon Mar 4 01:03:01 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:03:01 up 2:38, 1 user, load average: 0.07, 0.02, 0.36
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1    22:27   13.00s  0.86s  0.01s  -bash
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126871
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126871
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.260/templogs/preenv.intrate.260.0.log --lognum 260.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8558P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000200
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 48
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8558P
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8558P
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             2
Stepping:              2
BogoMIPS:              5400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke
                        waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              520 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-23,96-119
NUMA node1 CPU(s):    24-47,120-143
NUMA node2 CPU(s):    48-71,144-167
NUMA node3 CPU(s):    72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 859

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	260M	520M	20	Unified	3	212992	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257701 MB
node 0 free: 256230 MB
node 1 cpus: 24-47,120-143
node 1 size: 258037 MB
node 1 free: 256826 MB
node 2 cpus: 48-71,144-167
node 2 size: 258037 MB
node 2 free: 256545 MB
node 3 cpus: 72-95,168-191
node 3 size: 257984 MB
node 3 free: 256691 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 1056522420 kB

10. who -r

run-level 3 Mar 3 22:25

11. Systemd service manager version: systemd 252 (252-13.el9_2)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache

```

13. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
           chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi
           iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
           microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
           selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
           tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled   arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

indirect
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
dnf-system-upgrade iprdump iprint iprupdate iscsid iscsiuiop kpatch kvm_stat ledmon
man-db-restart-cache-update nftables nvmmf-autoconnect pesign psacct rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysex
sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 859

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

20. OS release

```

From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

```

21. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3

```

Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 54G 765G 7% /home

```

22. /sys/devices/virtual/dmi/id

```

Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890

```

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

5x Samsung M321R8GA0PB0-CWMMKH 64 GB 2 rank 5600
11x Samsung M321R8GA0PB0-CWMMXH 64 GB 2 rank 5600

```

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: Lenovo
BIOS Version: ESE121V-3.10
BIOS Date: 01/09/2024
BIOS Revision: 3.10
Firmware Revision: 3.90

```

Compiler Version Notes

```

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 859

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 859

ThinkSystem SR650 V3
(2.70 GHz, Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

-lqkmalloc

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-04 01:03:00-0500.
Report generated on 2024-03-27 20:21:37 by CPU2017 PDF formatter v6716.
Originally published on 2024-03-26.