



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation


**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_int\_base = 13.6**

**SPECspeed®2017\_int\_peak = 13.9**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

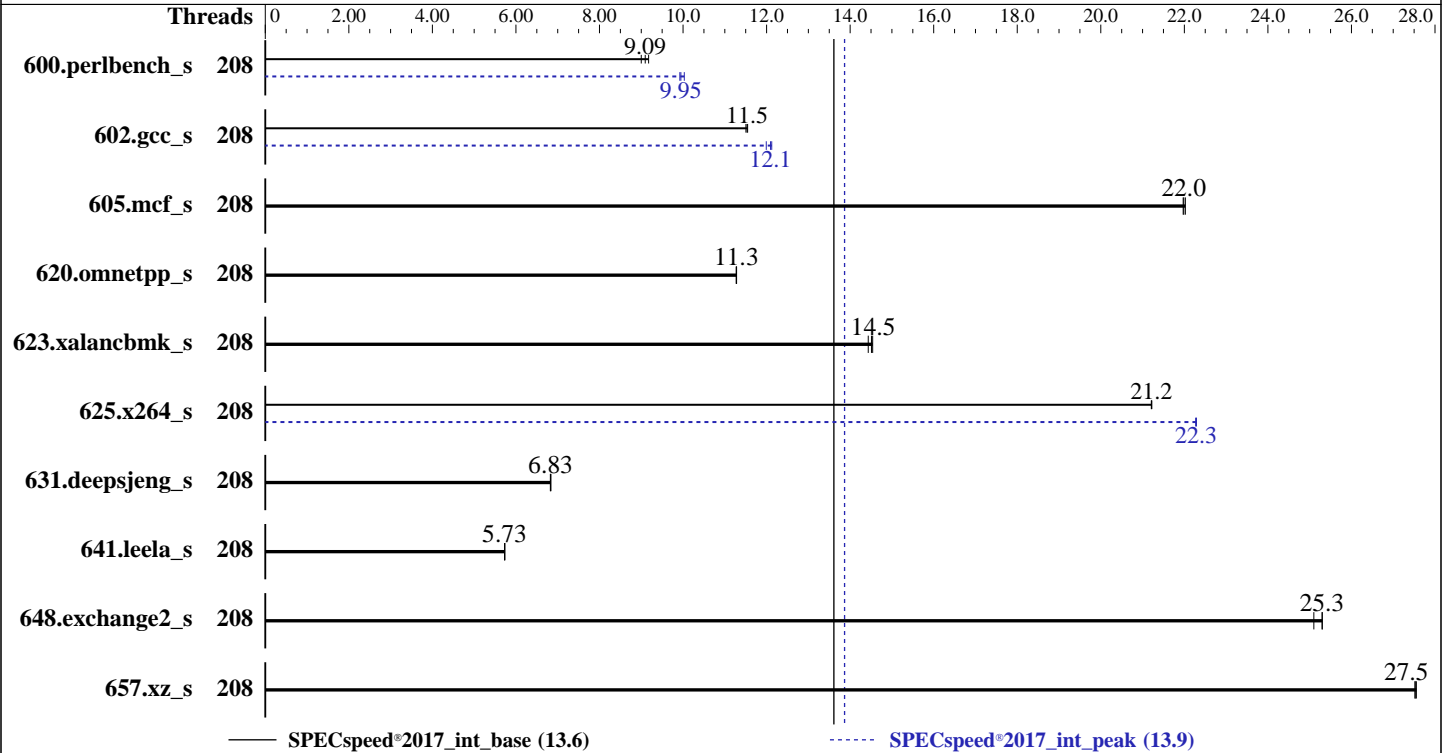

### Hardware

CPU Name: Intel Xeon Platinum 8470  
Max MHz: 3800  
Nominal: 2000  
Enabled: 104 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 105 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800AA-R)  
Storage: 1 x 960 GB NVMe  
Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
5.14.0-362.13.1.el9\_3.x86\_64  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Version 2.1 released Dec-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-28  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	208	<b>195</b>	<b>9.09</b>	197	9.00	193	9.18	208	<b>178</b>	<b>9.95</b>	177	10.0	179	9.92
602.gcc_s	208	345	11.5	346	11.5	<b>345</b>	<b>11.5</b>	208	328	12.1	<b>329</b>	<b>12.1</b>	332	12.0
605.mcf_s	208	215	22.0	<b>215</b>	<b>22.0</b>	214	22.0	208	215	22.0	<b>215</b>	<b>22.0</b>	214	22.0
620.omnetpp_s	208	145	11.3	145	11.3	<b>145</b>	<b>11.3</b>	208	145	11.3	145	11.3	<b>145</b>	<b>11.3</b>
623.xalancbmk_s	208	97.5	14.5	<b>97.7</b>	<b>14.5</b>	98.2	14.4	208	97.5	14.5	<b>97.7</b>	<b>14.5</b>	98.2	14.4
625.x264_s	208	<b>83.1</b>	<b>21.2</b>	83.1	21.2	83.2	21.2	208	79.2	22.3	79.1	22.3	<b>79.2</b>	<b>22.3</b>
631.deepsjeng_s	208	210	6.84	<b>210</b>	<b>6.83</b>	210	6.82	208	210	6.84	<b>210</b>	<b>6.83</b>	210	6.82
641.leela_s	208	<b>298</b>	<b>5.73</b>	298	5.73	297	5.73	208	<b>298</b>	<b>5.73</b>	298	5.73	297	5.73
648.exchange2_s	208	117	25.1	116	25.3	<b>116</b>	<b>25.3</b>	208	117	25.1	116	25.3	<b>116</b>	<b>25.3</b>
657.xz_s	208	225	27.5	<b>225</b>	<b>27.5</b>	224	27.6	208	225	27.5	<b>225</b>	<b>27.5</b>	224	27.6

SPECspeed®2017\_int\_base = **13.6**

SPECspeed®2017\_int\_peak = **13.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## General Notes (Continued)

system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Power Technology = Custom  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
KTI Prefetch = Enable  
LLC Dead Line Alloc = Disable  
Hyper-Threading = Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue Feb 13 10:09:51 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
10:09:51 up 22:18, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 Mon12 7.00s 0.87s 0.00s -bash

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C2G-28**

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126574
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126574
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=104 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=104 --tune base,peak --output_format all
--define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/temlogs/preenv.intspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8470
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 52
siblings      : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                208
On-line CPU(s) list:   0-207
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8470
BIOS Model name:      Intel(R) Xeon(R) Platinum 8470
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    52
Socket(s):             2
Stepping:              8
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts vnni avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             4.9 MiB (104 instances)
L1i cache:             3.3 MiB (104 instances)
L2 cache:              208 MiB (104 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-51,104-155
NUMA node1 CPU(s):    52-103,156-207
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre vl:         Mitigation; usercopy/swaps barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-28  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

Vulnerability Spectre v2:	Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-51,104-155
node 0 size: 515654 MB
node 0 free: 456869 MB
node 1 cpus: 52-103,156-207
node 1 size: 516054 MB
node 1 free: 459859 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

9. /proc/meminfo

MemTotal: 1056470380 kB

10. who -r

run-level 3 Feb 12 11:51

11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewallld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rshmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltyt canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprint iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon libvirt-guests libvirt lldpad man-db-restart-cache-update named named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvme-fc-autoconnect ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

```
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysextr target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodevd virtnwfilterd virtproxyd virtsecret d virtstoraged
vsftpd wpa_supplicant
indirect
pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@
```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9\_3.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 3.80 GHz and 3.80 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-28  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.3 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.3 (Plow)  
system-release Red Hat Enterprise Linux release 9.3 (Plow)  
-----

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 856G 396G 461G 47% /home  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero SDI200C3R-28  
Product Family: Family  
Serial: 2X21292023D  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 2.1  
BIOS Date: 12/07/2023  
BIOS Revision: 5.32  
-----

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Compiler Version Notes (Continued)

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C2G-28**

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200C2G-28**

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_int\_base = 13.6

SPECspeed®2017\_int\_peak = 13.9

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

602.gcc\_s: -w -m64 -std=c11 -Wl,-z,muldefs

```
-fprofile-generate(pass 1)
```

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
```

```
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
```

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

```
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
```

```
-ljemalloc
```

605.mcf\_s: basepeak = yes

625.x264\_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3

```
-ffast-math -flto -mfpmath=sse -funroll-loops
```

```
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
```

```
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>



# SPEC CPU<sup>®</sup>2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200C2G-28**  
(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed<sup>®</sup>2017\_int\_base = 13.6

SPECspeed<sup>®</sup>2017\_int\_peak = 13.9

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2024-02-12 23:39:51-0500.  
Report generated on 2024-04-09 15:42:32 by CPU2017 PDF formatter v6716.  
Originally published on 2024-04-09.