



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

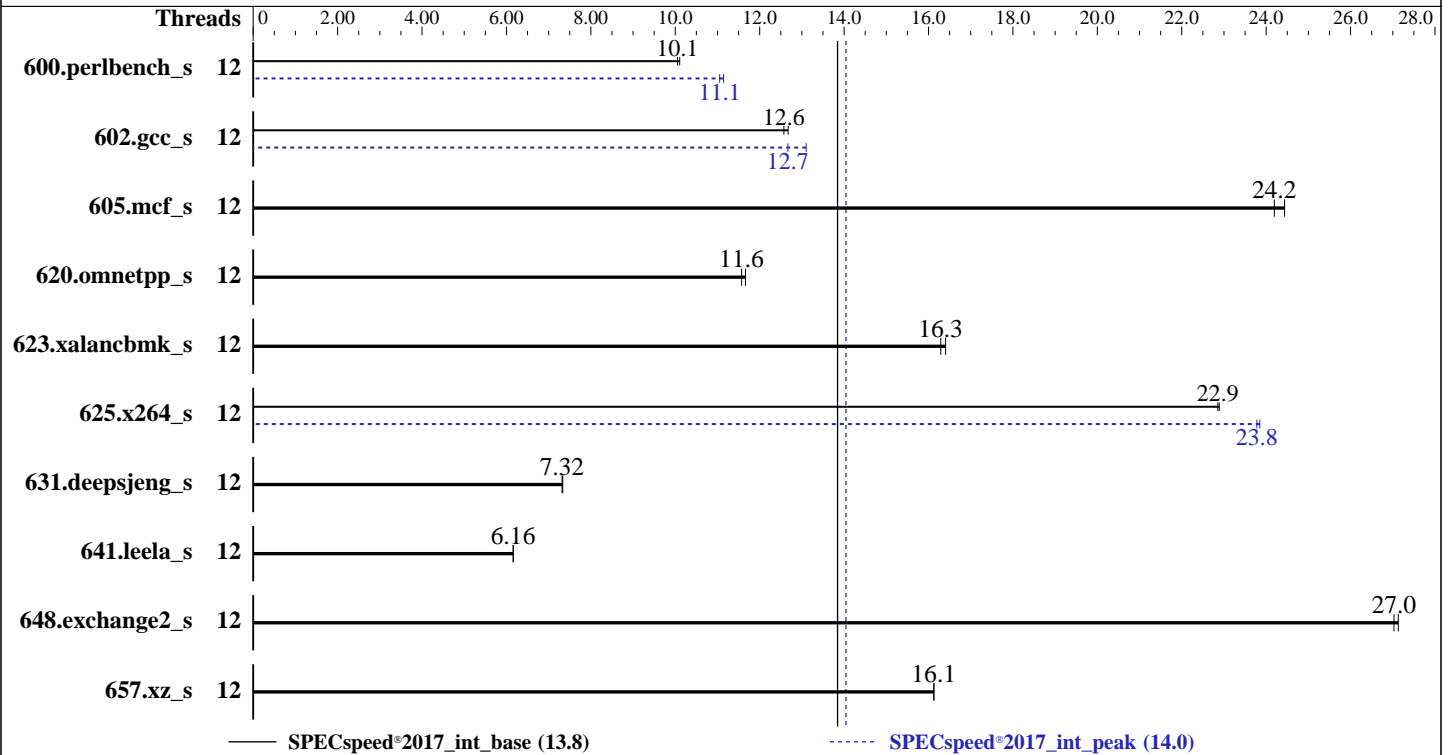

Hardware

CPU Name: Intel Xeon Silver 4510
 Max MHz: 4100
 Nominal: 2400
 Enabled: 12 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
 Storage: 40 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran
 Compiler for Linux;
 Parallel: Yes
 Firmware: Version 1.9.3 released Mar-2024
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	176	10.1	<u>177</u>	<u>10.1</u>			12	159	11.1	<u>161</u>	<u>11.1</u>		
602.gcc_s	12	314	12.7	<u>317</u>	<u>12.6</u>			12	304	13.1	<u>314</u>	<u>12.7</u>		
605.mcf_s	12	193	24.4	<u>195</u>	<u>24.2</u>			12	193	24.4	<u>195</u>	<u>24.2</u>		
620.omnetpp_s	12	140	11.7	<u>141</u>	<u>11.6</u>			12	140	11.7	<u>141</u>	<u>11.6</u>		
623.xalancbmk_s	12	<u>87.0</u>	<u>16.3</u>	86.4	16.4			12	<u>87.0</u>	<u>16.3</u>	86.4	16.4		
625.x264_s	12	<u>77.2</u>	<u>22.9</u>	77.1	22.9			12	74.0	23.8	<u>74.2</u>	<u>23.8</u>		
631.deepsjeng_s	12	<u>196</u>	<u>7.32</u>	195	7.33			12	<u>196</u>	<u>7.32</u>	195	7.33		
641.leela_s	12	277	6.16	<u>277</u>	<u>6.16</u>			12	277	6.16	<u>277</u>	<u>6.16</u>		
648.exchange2_s	12	<u>109</u>	<u>27.0</u>	108	27.1			12	<u>109</u>	<u>27.0</u>	108	27.1		
657.xz_s	12	<u>383</u>	<u>16.1</u>	383	16.1			12	<u>383</u>	<u>16.1</u>	383	16.1		

SPECspeed®2017_int_base = **13.8**

SPECspeed®2017_int_peak = **14.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled
Virtualization Technology : Disabled
DCU Streamer Prefetcher : Disabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Mar 29 11:53:33 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
11:53:33 up 1:58, 2 users, load average: 0.18, 1.91, 6.59
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Jun-2024
Software Availability: Dec-2023

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	:	:	09:54	?xdm?	28.48s	0.01s	gdm-session-worker [pam/gdm-autologin]
root	:0	:0	09:54	?xdm?	28.48s	0.00s	/usr/lib/gdm/gdm-x-session

--register-session --run-script gnome

 3. Username
 From environment variable \$USER: root

 4. ulimit -a
 core file size (blocks, -c) unlimited
 data seg size (kbytes, -d) unlimited
 scheduling priority (-e) 0
 file size (blocks, -f) unlimited
 pending signals (-i) 2059299
 max locked memory (kbytes, -l) 64
 max memory size (kbytes, -m) unlimited
 open files (-n) 1024
 pipe size (512 bytes, -p) 8
 POSIX message queues (bytes, -q) 819200
 real-time priority (-r) 0
 stack size (kbytes, -s) unlimited
 cpu time (seconds, -t) unlimited
 max user processes (-u) 2059299
 virtual memory (kbytes, -v) unlimited
 file locks (-x) unlimited

 5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 /usr/lib/systemd/systemd --user
 /usr/lib/gnome-terminal-server
 bash
 /bin/bash ./DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc
 --define DL-BIOS-adddcD=1 --define DL-VERS=5.1 --output_format html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc
 --define DL-BIOS-adddcD=1 --define DL-VERS=5.1 --output_format html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
 ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=12 --tune base,peak -o all --define
 intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define
 DL-BIOS-adddcD=1 --define DL-VERS=5.1 --output_format html,pdf,txt intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
 ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=12 --tune base,peak --output_format all
 --define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc
 --define DL-BIOS-adddcD=1 --define DL-VERS=5.1 --output_format html,pdf,txt --nopower --runmode speed
 --tune base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
 \$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl \$SPEC/bin/sysinfo
 \$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.0.2

 6. /proc/cpuinfo
 model name : INTEL(R) XEON(R) SILVER 4510
 vendor_id : GenuineIntel
 cpu family : 6
 model : 143

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Date: Mar-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```

stepping      : 8
microcode     : 0x2b0005c0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 12
siblings      : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-11
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 12
On-line CPU(s) list:   0-11
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) SILVER 4510
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    12
Socket(s):              1
Stepping:               8
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:             576 KiB (12 instances)
L1i cache:             384 KiB (12 instances)
L2 cache:              24 MiB (12 instances)
L3 cache:              30 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Date: Mar-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	576K	12	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	2M	24M	16	Unified	2	2048	1	64
L3	30M	30M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
 available: 1 nodes (0)
 node 0 cpus: 0-11
 node 0 size: 514855 MB
 node 0 free: 501323 MB
 node distances:
 node 0
 0: 10

9. /proc/meminfo

MemTotal: 527212312 kB

10. who -r

run-level 5 Mar 29 09:55

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb nvmmf-autoconnect ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

root=UUID=064d276f-5c68-41d8-badb-28c2ac76159a
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=384M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Platform Notes (Continued)

os-release SUSE Linux Enterprise Server 15 SP5

19. Disk information

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 40G   5.7G   35G   15% /mnt/ramdisk

```

20. /sys/devices/virtual/dmi/id

```

Vendor:      Dell Inc.
Product:     PowerEdge XR8610t
Product Family: PowerEdge
Serial:      31300AU

```

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
 8x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600, configured at 4400

```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      Dell Inc.
BIOS Version:     1.9.3
BIOS Date:        03/20/2024
BIOS Revision:    1.9

```

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
          | 657.xz_s(base, peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
          | 641.leela_s(base, peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```

```

=====
Fortran   | 648.exchange2_s(base, peak)

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 13.8

PowerEdge XR8610t (Intel Xeon Silver 4510)

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-28 23:53:32-0400.

Report generated on 2024-07-01 10:33:52 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-29.