



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation


New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

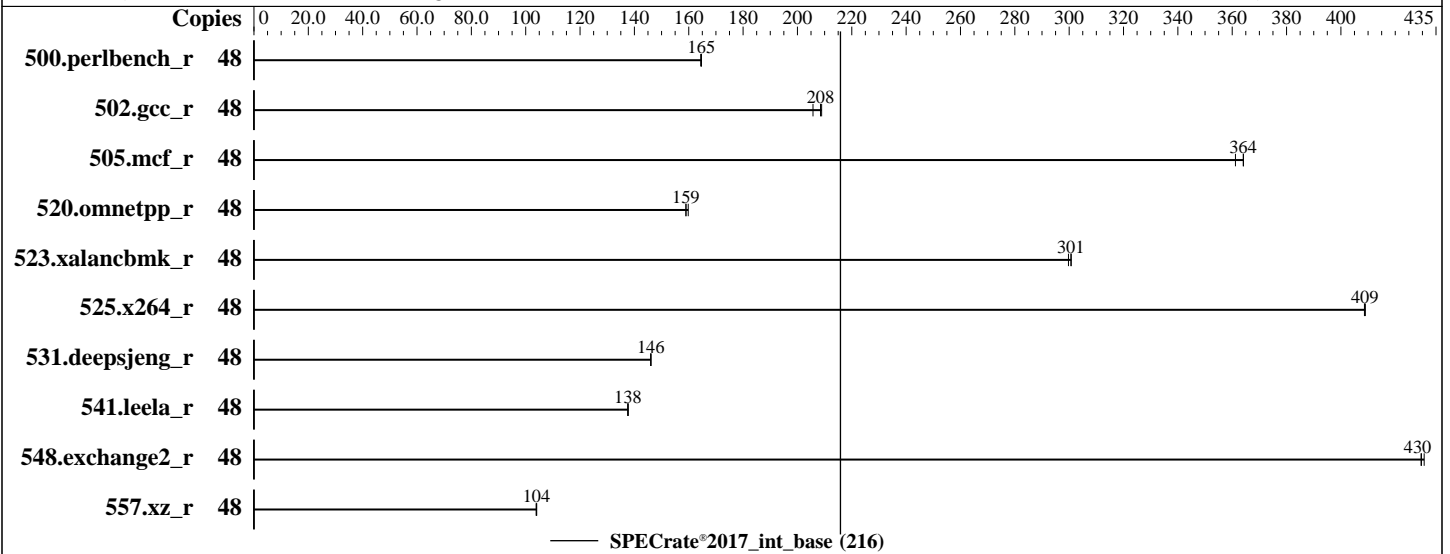

Hardware

CPU Name: Intel Xeon Silver 4510T
Max MHz: 3700
Nominal: 2000
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 30 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
Storage: 1 x 1.92 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
5.14.0-284.11.1.el9_2.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 6.10.43 released Jul-2024 BIOS
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	464	165	464	165	465	164							
502.gcc_r	48	330	206	325	209	326	208							
505.mcf_r	48	215	361	213	364	213	364							
520.omnetpp_r	48	394	160	396	159	396	159							
523.xalancbmk_r	48	169	300	169	301	169	301							
525.x264_r	48	206	409	206	409	206	409							
531.deepsjeng_r	48	377	146	377	146	377	146							
541.leela_r	48	577	138	577	138	578	138							
548.exchange2_r	48	292	431	293	429	293	430							
557.xz_r	48	499	104	498	104	499	104							

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Aug 20 13:14:32 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:14:32 up 12 min,  2 users,  load average: 0.13, 0.03, 0.01
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1      13:14   16.00s  0.88s  0.01s  sh intrate.sh
root     pts/0    13:13   32.00s  0.03s  0.03s  -bash
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124547
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 4124547
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
sh intrate.sh
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) SILVER 4510T
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 12
siblings      : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 64-87
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:        Little Endian

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: INTEL(R) XEON(R) SILVER 4510T
BIOS Model name: INTEL(R) XEON(R) SILVER 4510T
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
Stepping: 8
CPU max MHz: 3700.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmlil avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip
pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 60 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

L2	2M	48M	16 Unified	2	2048	1	64
L3	30M	60M	15 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 257109 MB
node 0 free: 256402 MB
node 1 cpus: 6-11,30-35
node 1 size: 258045 MB
node 1 free: 257412 MB
node 2 cpus: 12-17,36-41
node 2 size: 258005 MB
node 2 free: 257380 MB
node 3 cpus: 18-23,42-47
node 3 size: 258040 MB
node 3 free: 257393 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1055949248 kB

10. who -r

run-level 3 Aug 20 13:02

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brlty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit ipupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap nfs-server nftables nmb numad nvmmf-autoconnect ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild rrdcached saslauthd

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```

indirect
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodevdev virtnwfilterd virtproxyd virtsecretd virtstoraged
vsftpd wpa_supplicant
pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
console=tty0

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.70 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

20. Disk information
SPEC is set to: /home/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 96G 1.6T 6% /home

21. /sys/devices/virtual/dmi/id
Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R4900 G6 Ultra
Product Family: Rack
Serial: 210235A4CHH244000015

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
1x Hynix HMC94AGBRA179N 64 GB 2 rank 5600, configured at 4400
15x Hynix HMC94AGBRA181N 64 GB 2 rank 5600, configured at 4400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.10.43
BIOS Date: 07/27/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216
SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 Ultra (Intel Xeon Silver 4510T)

SPECrate®2017_int_base = 216
SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-20 13:14:31-0400.
Report generated on 2024-09-11 09:35:57 by CPU2017 PDF formatter v6716.
Originally published on 2024-09-10.