



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

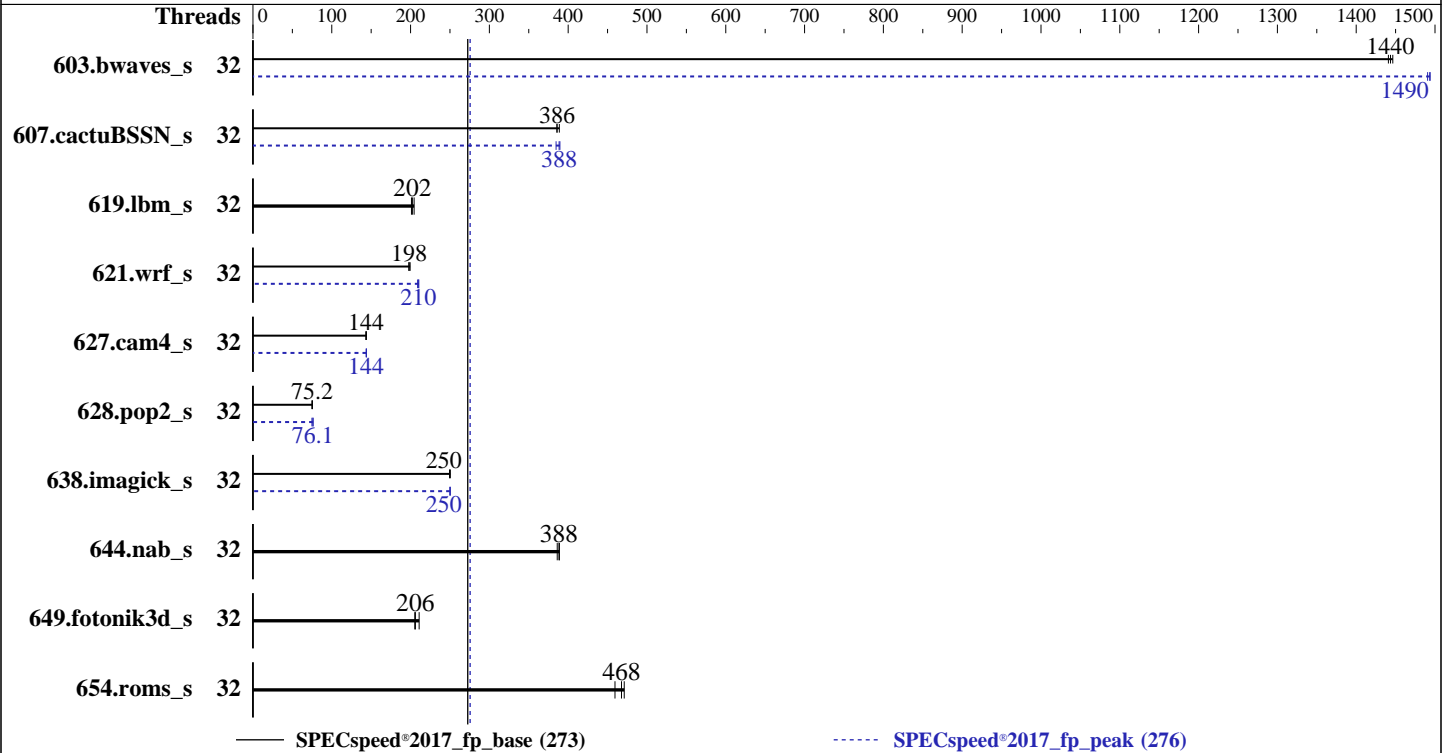

### Hardware

CPU Name: AMD EPYC 9184X  
 Max MHz: 4200  
 Nominal: 3550  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 2 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 1.6 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 kernel version 5.14.21-150500.53-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.3.4a released May-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Jun-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	40.8	1450	40.9	1440	<b>40.9</b>	<b>1440</b>	32	39.6	1490	<b>39.5</b>	<b>1490</b>	39.5	1490
607.cactuBSSN_s	32	42.9	389	43.2	386	<b>43.2</b>	<b>386</b>	32	43.3	385	42.8	390	<b>42.9</b>	<b>388</b>
619.lbm_s	32	26.0	201	<b>25.9</b>	<b>202</b>	25.6	204	32	26.0	201	<b>25.9</b>	<b>202</b>	25.6	204
621.wrf_s	32	66.3	199	<b>66.7</b>	<b>198</b>	66.9	198	32	<b>63.0</b>	<b>210</b>	63.3	209	62.8	210
627.cam4_s	32	<b>61.7</b>	<b>144</b>	61.8	143	61.6	144	32	<b>61.6</b>	<b>144</b>	61.7	144	61.5	144
628.pop2_s	32	157	75.4	158	74.9	<b>158</b>	<b>75.2</b>	32	156	76.3	<b>156</b>	<b>76.1</b>	159	74.8
638.imagick_s	32	57.6	250	57.8	249	<b>57.7</b>	<b>250</b>	32	57.7	250	<b>57.7</b>	<b>250</b>	57.7	250
644.nab_s	32	<b>45.0</b>	<b>388</b>	45.3	386	44.9	389	32	<b>45.0</b>	<b>388</b>	45.3	386	44.9	389
649.fotonik3d_s	32	44.4	205	<b>44.2</b>	<b>206</b>	43.2	211	32	44.4	205	<b>44.2</b>	<b>206</b>	43.2	211
654.roms_s	32	33.4	471	<b>33.7</b>	<b>468</b>	34.3	459	32	33.4	471	<b>33.7</b>	<b>468</b>	34.3	459

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To disable THP for peak runs of 621.wrf\_s:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Jun-2023

## Operating System Notes (Continued)

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:  
SMT Mode set to Disabled  
NUMA nodes per socket set to NPS1  
Determinism Slider set to Power

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

## Platform Notes (Continued)

DF C-States set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Aug 15 07:32:05 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
07:32:05 up 3:14, 1 user, load average: 0.00, 0.03, 0.54
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    -              04:17       21.00s     1.00s     0.10s    /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6191432
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 6191432
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py -b fpspeed
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9184X 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 2
microcode      : 0xa101248
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 16
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 0: apicids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: apicids 128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9184X 16-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

Core(s) per socket:      16
Socket(s):              2
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           4208.6909
CPU min MHz:           1500.0000
BogoMIPS:              7089.28
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmperf rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2
                        x2apic movbe popcnt aes xsave avx fl6c rdrand lahf_lm cmp_legacy svm
                        extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt
                        tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                        cdp_l3 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                        vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                        v_omsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                        overflow_recov succor smca fsrm flush_lld
Virtualization:        AMD-V
L1d cache:             1 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              32 MiB (32 instances)
L3 cache:              1.5 GiB (16 instances)
NUMA node(s):         2
NUMA node0 CPU(s):   0-15
NUMA node1 CPU(s):   16-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                        filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15
node 0 size: 773803 MB
node 0 free: 772762 MB
node 1 cpus: 16-31

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```
node 1 size: 774084 MB
node 1 free: 773377 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

```
9. /proc/meminfo
MemTotal: 1585037380 kB
```

```
10. who -r
run-level 3 Aug 15 04:17
```

```
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog libvirtd lvm2-monitor nscd postfix purge-kernels rollback
rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
iscsi-init iscsid issue-add-ssh-keys kdump kdump-early kexec-load ksm kvm_stat
libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver
rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
strongswan strongswan-starter svnservice systemd-boot-check-no-failures
systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd virtnodeudev virtnwfilterd
virtproxyd virtqemud virtsecret virtstoraged
indirect pcsd virtlockd virtlogd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=5eac0278-b5d7-4d70-9f22-3587a0d03dd8
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 3.55 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

15. sysctl
   kernel.numa_balancing      1
   kernel.randomize_va_space  0
   vm.compaction_proactiveness 20
   vm.dirty_background_bytes  0
   vm.dirty_background_ratio  10
   vm.dirty_bytes             0
   vm.dirty_expire_centisecs  3000
   vm.dirty_ratio             8
   vm.dirty_writeback_centisecs 500
   vm.dirtytime_expire_seconds 43200
   vm.extfrag_threshold       500
   vm.min_unmapped_ratio      1
   vm.nr_hugepages            0
   vm.nr_hugepages_mempolicy   0
   vm.nr_overcommit_hugepages 0
   vm.swappiness              1
   vm.watermark_boost_factor   15000
   vm.watermark_scale_factor   10
   vm.zone_reclaim_mode       1

-----

16. /sys/kernel/mm/transparent_hugepage
   defrag      [always] defer defer+madvise madvise never
   enabled     [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force

-----

17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

-----

18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP5

-----

19. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sdb2       btrfs 222G  11G  210G   5% /home

-----

20. /sys/devices/virtual/dmi/id
   Vendor:      Cisco Systems Inc
   Product:     UCSC-C245-M8SX
   Serial:      WZP27360C65

-----

21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

4x 0xCE00 M321R8GA0PB0-CWMJH 64 GB 2 rank 5600, configured at 4800  
20x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C245M8.4.3.4a.0.0520240849  
BIOS Date: 05/20/2024  
BIOS Revision: 5.27

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlIBM -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlIBM -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlIBM -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

`-Wno-return-type -Wno-unused-command-line-argument`

## Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: `basepeak = yes`

638.imagick\_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`

`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`

`-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp`

`-flto -fstruct-layout=9 -mllvm -unroll-threshold=50`

`-fremap-arrays -fstrip-mining`

`-mllvm -inline-threshold=1000`

`-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt`

`-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

644.nab\_s: `basepeak = yes`

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Jun-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9184X 16-Core Processor)

SPECspeed®2017\_fp\_base = 273

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2024

Hardware Availability: Jun-2024

Software Availability: Jun-2023

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

```
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-15 07:32:05-0400.

Report generated on 2024-09-11 09:37:47 by CPU2017 PDF formatter v6716.

Originally published on 2024-09-10.