



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066


Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

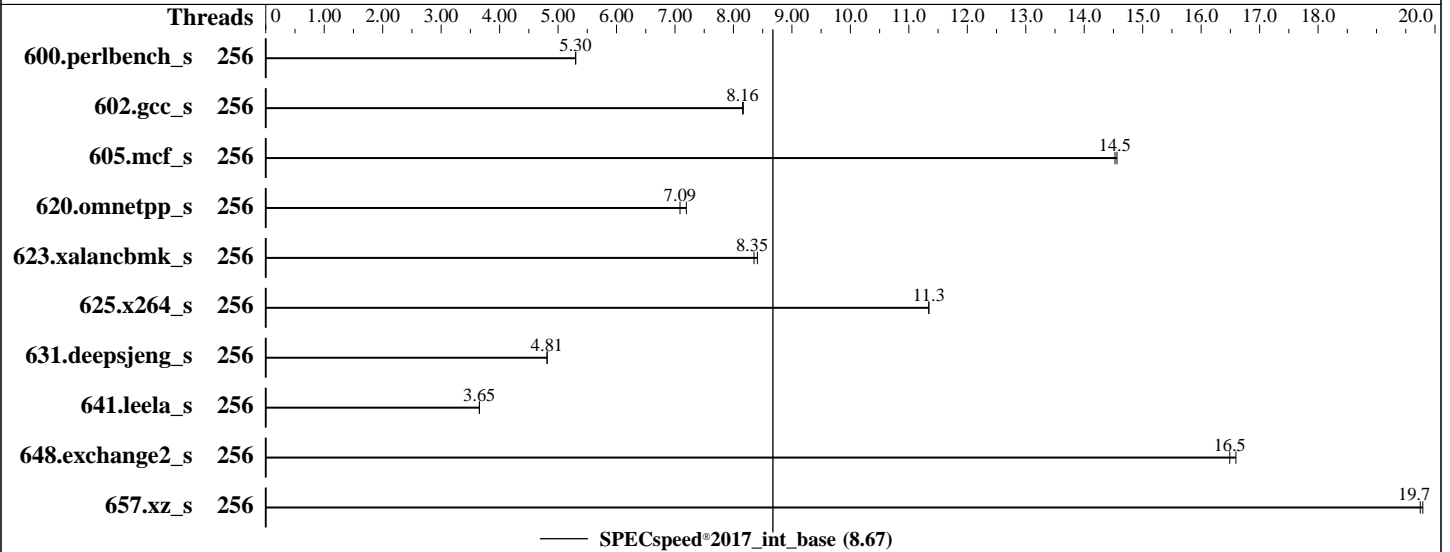

## Hardware

CPU Name: Intel Xeon 6756E  
 Max MHz: 2600  
 Nominal: 1800  
 Enabled: 256 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 96 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 5.14.0-427.13.1.el9\_4.x86\_64  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 7.00.02 released Sep-2024 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Jun-2024

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	335	5.30	<b><u>335</u></b>	<b><u>5.30</u></b>									
602.gcc_s	256	<b><u>488</u></b>	<b><u>8.16</u></b>	487	8.17									
605.mcf_s	256	<b><u>325</u></b>	<b><u>14.5</u></b>	324	14.6									
620.omnetpp_s	256	<b><u>230</u></b>	<b><u>7.09</u></b>	227	7.19									
623.xalancbmk_s	256	<b><u>170</u></b>	<b><u>8.35</u></b>	168	8.41									
625.x264_s	256	<b><u>156</u></b>	<b><u>11.3</u></b>	156	11.3									
631.deepsjeng_s	256	<b><u>298</u></b>	<b><u>4.81</u></b>	298	4.81									
641.leela_s	256	<b><u>467</u></b>	<b><u>3.65</u></b>	467	3.66									
648.exchange2_s	256	<b><u>178</u></b>	<b><u>16.5</u></b>	177	16.6									
657.xz_s	256	<b><u>313</u></b>	<b><u>19.7</u></b>	312	19.8									

SPECspeed®2017\_int\_base = 8.67

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Jun-2024

Software Availability: Apr-2024

## Platform Notes

### BIOS Settings:

LLC dead line alloc = Disabled  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Oct 10 01:51:39 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.e19\_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:51:39 up 6 min,  2 users,  load average: 0.05, 1.34, 0.96
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1      01:46   11.00s  1.44s  0.00s sh speed.sh
root     pts/0    01:50   50.00s  0.01s  0.01s -bash
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```

scheduling priority          (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2059593
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority         (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes         (-u) 2059593
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
sh speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=256 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed -n 2
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=256 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --iterations 2 --nopower --runmode speed --tune base
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $$SPEC/tmp/CPU2017.017/templots/preenv.intspeed.017.0.log --lognum 017.0 --from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /home/speccpu

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6756E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x13000211
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 128
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6756E
BIOS Model name:      Intel(R) Xeon(R) 6756E
CPU family:            6
Model:                 175
Thread(s) per core:    1
Core(s) per socket:    128
Socket(s):              2
Stepping:               3
CPU(s) scaling MHz:    100%
CPU max MHz:           2600.0000
CPU min MHz:           800.0000
BogoMIPS:              3600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                      rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                      xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                      dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                      cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                      erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat
                      pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnni umip pku ospke
                      waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri
                      movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d
                      arch_capabilities
Virtualization:        VT-x
L1d cache:             8 MiB (256 instances)
L1i cache:             16 MiB (256 instances)
L2 cache:              256 MiB (64 instances)
L3 cache:              192 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-127
NUMA node1 CPU(s):    128-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Jun-2024

Software Availability: Apr-2024

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	64K	16M	8	Instruction	1	128	1	64
L2	4M	256M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-127
node 0 size: 257001 MB
node 0 free: 255909 MB
node 1 cpus: 128-255
node 1 size: 257960 MB
node 1 free: 256694 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

MemTotal: 527320952 kB

10. who -r

run-level 3 Oct 10 01:45

11. Systemd service manager version: systemd 252 (252-32.el9\_4)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewallld
gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger
power-profiles-daemon qemu-guest-agent rshmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update
systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltyt canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot
fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprump iprinit iprupdate ipsec
iscsi-init iscsid iscsiui kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad
man-db-restart-cache-update named named-chroot netavark-dhcp-proxy
netavark-firewalld-reload nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect
ostree-readonly-sysroot-migration ostree-state-overlay@ pesign pmfind pmie_farm
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```

indirect
pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@
podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysexct target
targetclid tog-pegasus trace-cmd virtinterfaced virtlockd virtlogd virtnetworkd
virtnodevd virtnwfilterd virtproxyd virtsecretd virtstoragee vsftpd wpa_supplicant
iscsi pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 184:
  current policy: frequency should be within 800 MHz and 2.60 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Jun-2024

Software Availability: Apr-2024

## Platform Notes (Continued)

```

defrag          always defer defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  1.8T 256G 1.5T 15% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      New H3C Technologies Co., Ltd.
Product:     H3C UniServer R4900 G7
Serial:      210235A51GH249000025

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Hynix HMC88AHBRA290N 32 GB 2 rank 6400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     7.00.02
BIOS Date:        09/14/2024
BIOS Revision:    5.35
Firmware Revision: 1.16

```

## Compiler Version Notes

```

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017\_int\_base = 8.67

H3C UniServer R4900 G7 (Intel Xeon 6756E)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-10 01:51:38-0400.

Report generated on 2024-11-06 12:21:21 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-05.